


**GOOD-ARK****SESLC Series****Low Capacitance ESD Protector**ROHS 

Feature

- 350W peak pulse power per line ($t_P = 8/20\mu s$)
- SOD-323 package
- Replacement for MLV(0805)
- Unidirectional or Bidirectional configurations
- Protects one power or I/O port
- ESD protection > 40 kV
- Low clamping voltage
- RoHS compliant
- Transient protection for data lines to IEC 61000-4-2(ESD) $\pm 15KV(\text{air})$, $\pm 8KV(\text{contact})$; IEC 61000-4-4 (EFT) 40A (5/50ns)
IEC 61000-4-5(surge): 24A, 8/20 μs -Level 2(line-ground) & Level 3(line-line)

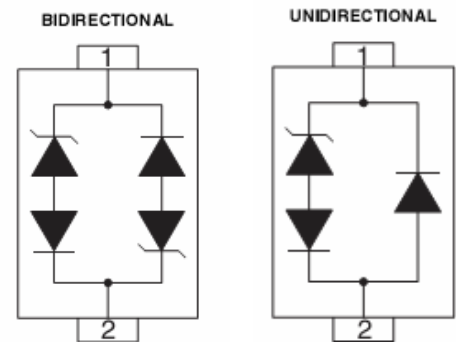

Applications

- Ethernet – 10/100/1000 Base T
- Cellular phones
- Handheld-Wireless Systems
- PDAs
- USB Interface

Electrical characteristics per line@25°C(unless otherwise specified)

Device	V_{RWM}	I_R @ V_{RWM}	Min Breakdown Voltage V_{BR} @1mA	Max Clamping Voltage V_C		Typ. C_j @0V,1MHZ
				@ $I_{P=1A}$	@ I_{PP}	
	Volts	μA	Volts	Volts	Volts	pF
SESLC3V3D323-2U	3.3	1	4.0	7.0	19.0@20.0A	3
SESLC3V3D323-2B	3.3	1	4.0	7.0	19.0@20.0A	3
SESLC5VD323-2U	5	1	6.0	9.8	18.3@17.0A	3
SESLC5VD323-2B	5	1	6.0	9.8	18.3@17.0A	3
SESLC8VD323-2U	8	1	8.5	13.4	18.5@17.0A	3
SESLC8VD323-2B	8	1	8.5	13.4	18.5@17.0A	3
SESLC12VD323-2U	12	1	13.3	19.0	28.6@11.0A	3
SESLC12VD323-2B	12	1	13.3	19.0	28.6@11.0A	3
SESLC16VD323-2U	16	1	16.7	24.0	31.8@10.0A	3
SESLC16VD323-2B	16	1	16.7	24.0	31.8@10.0A	3
SESLC18VD323-2U	18	1	20.0	29.0	45.0@8.0A	3
SESLC18VD323-2B	18	1	20.0	29.0	45.0@8.0A	3
SESLC24VD323-2U	24	1	26.7	43.0	56.0@6.0A	3
SESLC24VD323-2B	24	1	26.7	43.0	56.0@6.0A	3



GOOD-ARK

Low Capacitance ESD Protector

SESLC Series



ROHS

note: Unidirectional: -2U; Bidirectional: -2B

Typical Characteristics

Rating	Symbol	Value	Units
Unidirectional Peak Pulse Power ($t_p=8/20\mu S$)	P_{pp}	350	W
Operating Temperature	T_J	-55 to +150	$^{\circ}C$
Storage Temperature	T_{STG}	-55 to +150	$^{\circ}C$




Absolute maximum rating @25 $^{\circ}C$

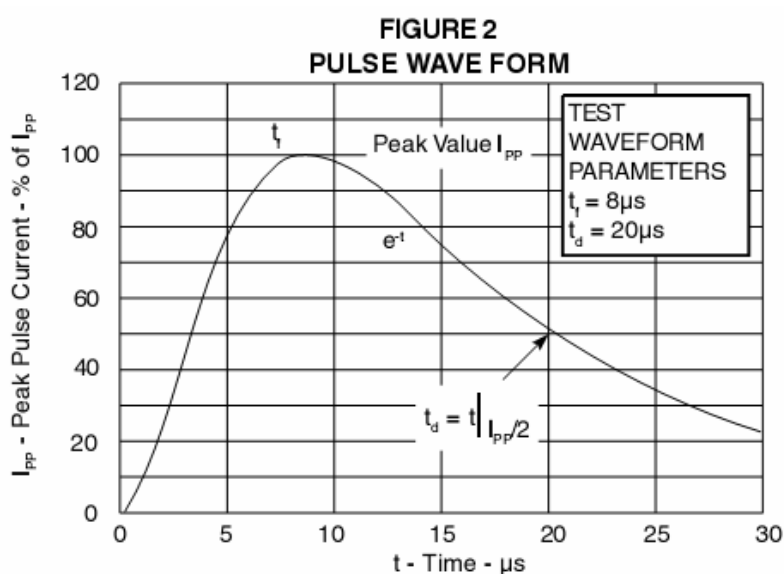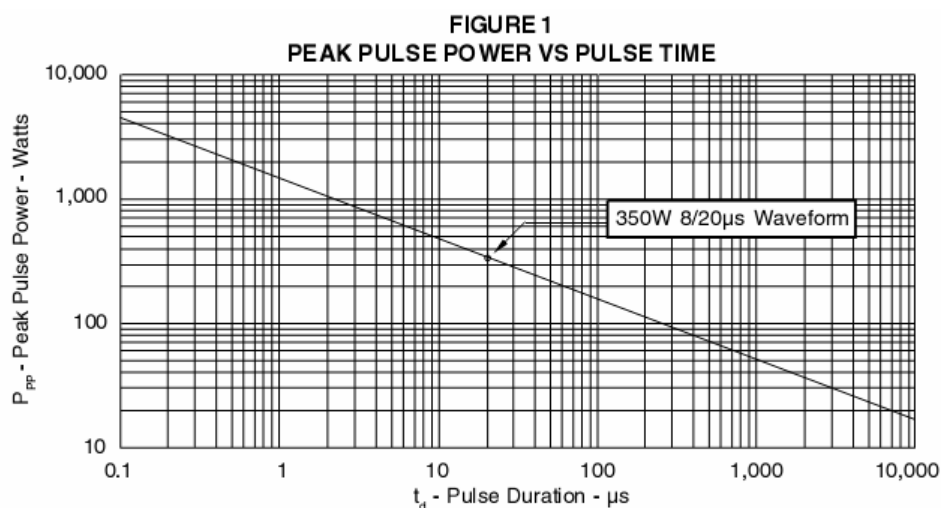


**GOOD-ARK****SESLC Series****Low Capacitance ESD Protector**

ROHS

Product dimension and pad size

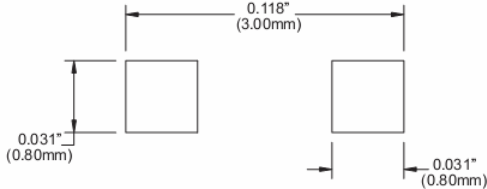PACKAGE OUTLINE  	SOD-323 PACKAGE  PACKAGE DIMENSIONS <table><thead><tr><th rowspan="2">DIM</th><th colspan="2">MILLIMETERS</th><th colspan="2">INCHES</th></tr><tr><th>MIN</th><th>MAX</th><th>MIN</th><th>MAX</th></tr></thead><tbody><tr><td>A</td><td>1.60</td><td>1.90</td><td>0.063</td><td>0.075</td></tr><tr><td>B</td><td>1.15</td><td>1.45</td><td>0.045</td><td>0.057</td></tr><tr><td>C</td><td>2.39</td><td>2.70</td><td>0.094</td><td>0.106</td></tr><tr><td>D</td><td>0.80</td><td>1.10</td><td>0.031</td><td>0.043</td></tr><tr><td>E</td><td>0.25</td><td>0.40</td><td>0.010</td><td>0.016</td></tr><tr><td>F</td><td>0.10</td><td>0.20</td><td>0.004</td><td>0.008</td></tr><tr><td>H</td><td>-</td><td>0.10</td><td>-</td><td>0.004</td></tr><tr><td>L</td><td>0.20</td><td>-</td><td>0.008</td><td>-</td></tr></tbody></table>	DIM	MILLIMETERS		INCHES		MIN	MAX	MIN	MAX	A	1.60	1.90	0.063	0.075	B	1.15	1.45	0.045	0.057	C	2.39	2.70	0.094	0.106	D	0.80	1.10	0.031	0.043	E	0.25	0.40	0.010	0.016	F	0.10	0.20	0.004	0.008	H	-	0.10	-	0.004	L	0.20	-	0.008	-
DIM	MILLIMETERS		INCHES																																															
	MIN	MAX	MIN	MAX																																														
A	1.60	1.90	0.063	0.075																																														
B	1.15	1.45	0.045	0.057																																														
C	2.39	2.70	0.094	0.106																																														
D	0.80	1.10	0.031	0.043																																														
E	0.25	0.40	0.010	0.016																																														
F	0.10	0.20	0.004	0.008																																														
H	-	0.10	-	0.004																																														
L	0.20	-	0.008	-																																														
MOUNTING PAD 	NOTES 1. Controlling Dimensions in Millimeters. 2. Dimensions are exclusive of mold flash and metal burrs. TAPE & REEL ORDERING NOMENCLATURE																																																	

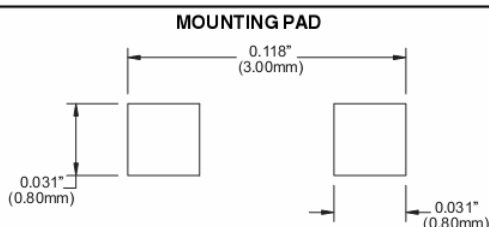

NOTES

1. Controlling Dimensions in Millimeters.
2. Dimensions are exclusive of mold flash and metal burrs.

TAPE & REEL ORDERING NOMENCLATURE

Carrier size

	DIM	Min.	Max.
	Ao	1.42	1.62
	Bo	2.80	3.00
	Ko	1.25	1.45
	Po	3.90	4.10
	P1	3.90	4.10
	P2	1.95	2.05
	T	0.24	0.27
	E	1.65	1.85
	F	3.45	3.55
	Do	1.40	1.60
	D1	0.75	1.25
	W	7.90	8.30
	G	-	*2.08
	H	-	*1.07
	I	-	*0.84
	a1	-	5°
	a2	-	8°

*: Typical, Unit: mm

Revision History

Revision	Date	Changes
1.0	2008-7-3	-