

6

5

4

3

2


1

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/26/10	


APPROVED: _____

DATE: _____ TITLE: _____


D

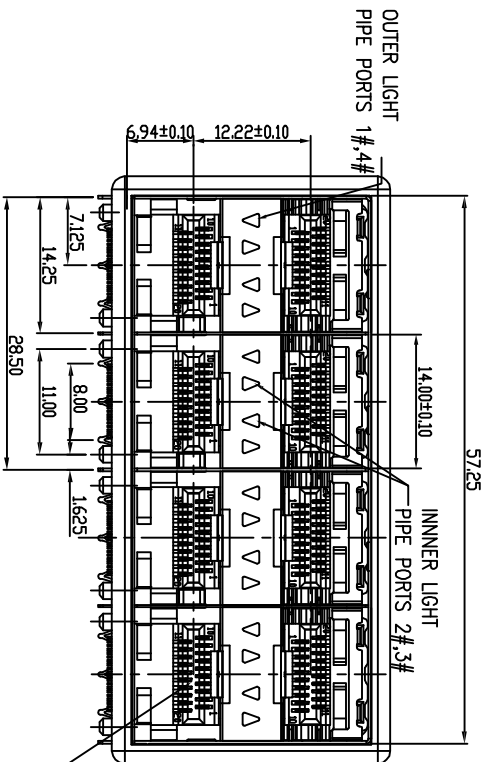

C

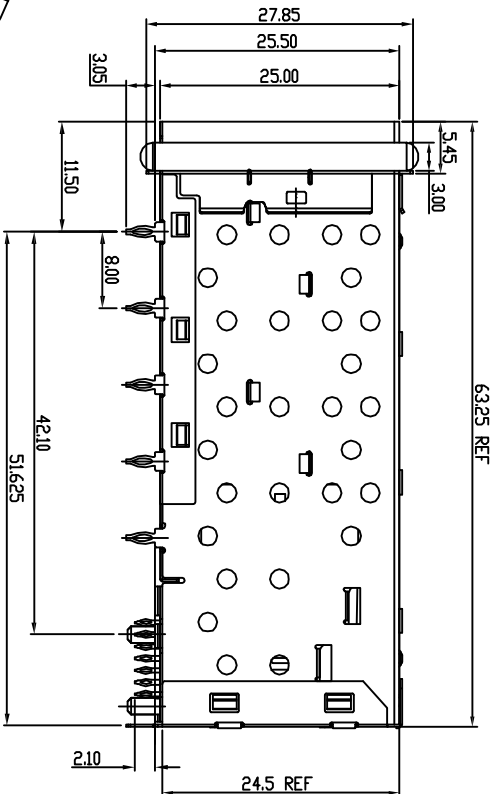

B

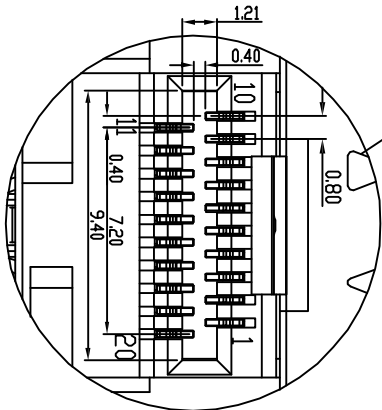

SPECIFICATIONS:

Material:

Housing: Hi-temp thermoplastic, glass reinforced, rated UL 94V-0

Housing color: Black

Contact: Copper Alloy

Cage: Copper Alloy

Plating:

15u" gold over Nickel underplate on contact area.

Electrical:

Contact resistance: 40 milliohms max initial.

Dielectric withstanding voltage: 300 AC/Min.

Temperature Rating:

Operating temperature: -55°C to +85°C

Storage temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant

A

A

B

C

D

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

SFP 2X4, W/ INNER & OUTER LIGHT PIPE PORTS

TITLE

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED
INCHES

.X ± .10 ØX ± .10
.XX ± .020 ØXX ± .015
.XXX ± .015 ØXXX ± .010

APPROVALS

DATE

DRAWN DY 5/26/10

CHECKED

APPROVED

SIZE PART NO.

X

SFCJ-8-LP3-EMI-GT

REV.

-

REF: S0005C

SCALE: NTS

SHEET 1 OF 4

6

5

4

3

2

1