



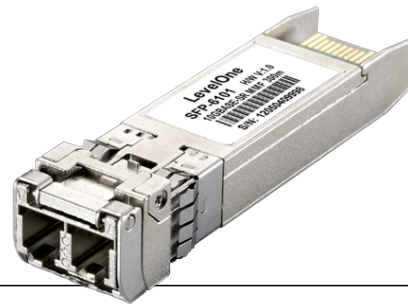

SFP-6101 Version: 1

10Gbp MMF SFP-Plus Transceiver, 300m, 850nm

LevelOne's SFP-Plus Transceivers are hot-swappable multi-purpose optical modules support 10Gigabit Ethernet applications across most switching and routing platforms. The transceivers support to operate at 10Gbps serial optical data transfer rates on a single duplex fiber core with a length of up to 40km (SMF) or 300m (MMF), ideally suited for data centers, enterprise and storage area networks. In addition, the LevelOne SFP-Plus transceivers adopt the most advanced technology to minimize the power consumption in ultra-high speed.

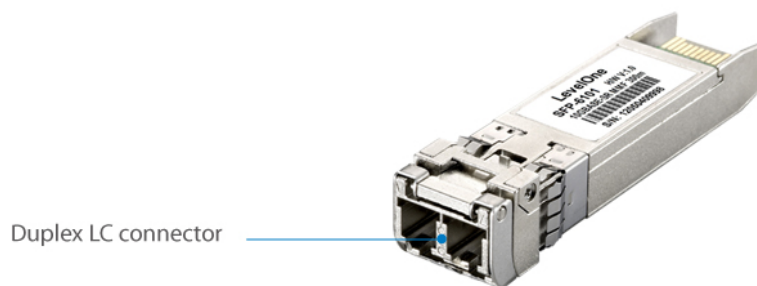

Key Features

- High-quality 10Gbase short range SFP-Plus transceiver
- Comply with SFP Multi-Sourcing Agreement (MSA) to work in MSA compliant devices
- Supports Digital Optical Monitoring (DOM) and Digital Diagnostics Monitoring Interface (DDMI) for easy status monitoring
- Hot-swappable providing non-stop service
- Provides duplex LC connector
- Operating temperature: 0°C ~ 70°C

Works Well With



GTL-2880

20 GE + 4 GE Combo SFP + 4 10GE SFP-Plus L2-Plus Managed Switch



GTL-5280

44 GE + 4 GE Combo SFP + 4 10GE SFP-Plus L2-Plus Managed Switch



GTP-2880

20 GE PoE-Plus + 4 GE PoE-Plus Combo SFP + 4 10GE SFP-Plus L2-Plus Managed Switch, 185W

Specifications

System Specifications

Connectors and Cabling:

Duplex LC Connector, Multimode fiber(MMF)

Wavelength(nm):

850nm VCSEL Laser Diode

Transmit Power:

-6.5 ~ -1 dBm

Power Budget:

4.6 dB

Power:

Supply Voltage: 3.3V

Max Voltage/Current: 3.6V/180mA

Standards & Protocols:

IEEE 802.3ae 10GBASE

SFP+ Multi-Sourcing Agreement(MSA)

Receive Sensitivity(dBm):

-11.1 dBm

Features

General:

Hot-swappable

Performance

Data Transfer Rate:

10Gbps Bi-directional data link

Operating Distance:

up to 300m (OM3), 82m (OM2) & 33m (OM1)

Fiber channel up to 10.518Gbps

Environment

Temperature (°C):

Operating: 0°C ~ 70°C

Storage: -40 ~ 85°C

Humidity (Non-condensing):

5 ~ 95%

Physical Specifications

Dimensions (W x D x H mm):

13.7 x 56.5 x 8.95 mm

Weight (g):

20g


Others

Approval and Compliance:

Class 1 eye safety and comply with EN 60825-1

CE, FCC, RoHS

Diagram

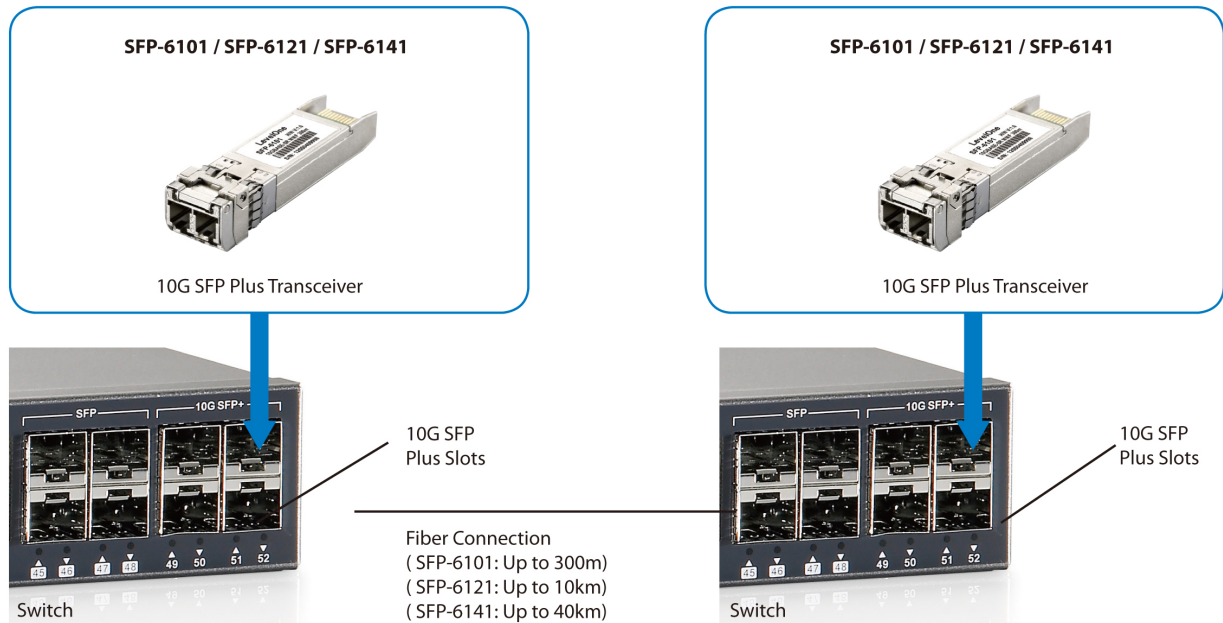

Order Information

SFP-6101



All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.