Solid State Devices, Inc.
14830 Valley View Blvd * La Mirada, Ca 90638
Phone: (562) 404-7855 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SFT501 and SFT503 Series

DESIGNER'S DATA SHEET

Part Number / Ordering Information [1/]

SFT501 __ __
SFT503 __ __

+ **Screening** [2/]
- __ = Not Screen
- TX = TX Level
- TXV = TXV Level
- S = S Level


+ **Package** [3/]
- __ = TO-5

5 AMP 200 Volts HIGH SPEED PNP Transistor

Features:
- Radiation Tolerant
- Fast Switching
- High Frequency, 50 MHz Typical
- BVCEO 150 Volts Min
- High Linear Gain
- Very Low Leakage and Saturation
- 200ºC Operating Temperature
- Gold Eutectic Die Attach
- Designed for Complementary Use with SFT502 and SFT504

Maximum Ratings	Symbol	Value	Units
Collector – Emitter Voltage	V_{CEO}	150	Volts
Collector – Base Voltage	V_{CBO}	200	Volts
Emitter – Base Voltage	V_{EBO}	7	Volts
Continues Collector Current	I_C	5	Amps
Base Current	I_B	1	Amps
Power Dissipation @ TC = 50ºC Derate above 50ºC	P_D	10 66.6	W mW/ºC
Operating & Storage Temperature	Top & Tstg	-65 to +200	ºC
Maximum Thermal Resistance Junction to Case	$R_{?JC}$	15	ºC/W

TO-5

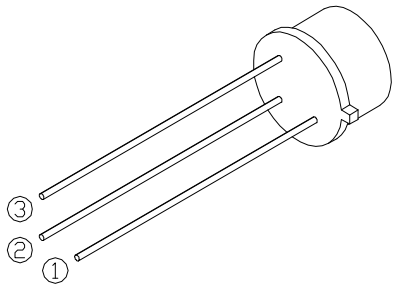

Solid State Devices, Inc.
14830 Valley View Blvd * La Mirada, Ca 90638
Phone: (562) 404-7855 * Fax: (562) 404-1773
ssdi@ssdi-power.com * www.ssdi-power.com

SFT501 and SFT503 Series

Electrical Characteristic [4]		Symbol	Min	Typ	Max	Units
Collector – Emitter Breakdown Voltage	I_C = 50mA	BV_{CEO}	150	200	—	Volts
Collector – Base Breakdown Voltage	I_C = 200µA	BV_{CBO}	200	275	—	Volts
Emitter – Base Breakdown Voltage	I_E = 200µA	BV_{EBO}	7	13	—	Volts
Collector – Cutoff Current	V_{CE} = 100 V	I_{CEO}	—	—	1.0	µA
Collector – Cutoff Current	V_{CB} = 100 V	I_{CBO}	—	—	500	nA
Emitter – Cutoff Current	V_{EB} = 6 V	I_{EBO}	—	—	500	nA
DC Current Gain *						
SFT501	V_{CE} = 5V, I_C = 50mA	h_{FE}	20	—	—	—
	V_{CE} = 5V, I_C = 2.5A		30	—	—	
	V_{CE} = 5V, I_C = 5A		20	70	—	
SFT503	V_{CE} = 5V, I_C = 50mA		50	—	—	
	V_{CE} = 5V, I_C = 2.5A		50	—	—	
	V_{CE} = 5V, I_C = 5A		40	70	—	
Collector – Emitter Saturation Voltage *	I_C = 2.5A, I_B = 250mA	$V_{CE(Sat)}$	—	0.35	0.75	Volts
	I_C = 5.0A, I_B = 500mA		—	0.6	1.5	
Base – Emitter Saturation Voltage *	I_C = 2.5A, I_B = 250mA	$V_{BE(Sat)}$	—	1.0	1.3	Volts
	I_C = 5.0A, I_B = 500mA		—	1.2	1.5	
Current Gain Bandwidth Product	V_{CE} = 5V, I_C = 0.5A, f = 10MHz	f_T	40	55	—	MHz
Output Capacitance	V_{CB} = 10V, I_E = 0A, f = 1MHz	c_{ob}	—	130	225	pF
Input Capacitance	V_{BE} = 10V, I_C = 0A, f = 1MHz	C_{ib}	—	450	600	pF
Delay Time	V_{CC} = 50V, I_C = 5A, I_{B1} = I_{B2} = 0.5A	t_d	—	25	50	nsec
Rise Time		t_r	—	40	250	nsec
Storage Time		t_S	—	320	600	nsec
Fall Time		t_f	—	130	300	nsec

NOTES:

* Pulse Test: Pulse Width = 300µsec, Duty Cycle = 2%

1/ For Ordering Information, Price, and Availability Contact Factory.

2/ Screening per MIL-PRF-19500

3/ For Package Outlines Contact Factory.

4/ Unless Otherwise Specified, All Electrical Characteristics @25ºC.

Available Part Numbers:

SFT501
SFT503

PIN ASSIGNMENT

Package	Pin 1	Pin 2	Pin 3 (Case)
TO-5	Emitter	Base	Collector