

SOT-523 Plastic-Encapsulate MOSFETS

SK2301AAT P-Channel 20-V(D-S) MOSFET



FEATURE

TrenchFET Power MOSFET

APPLICATIONS

- Load Switch for Portable Devices
- DC/DC Converter

MARKING: A1S

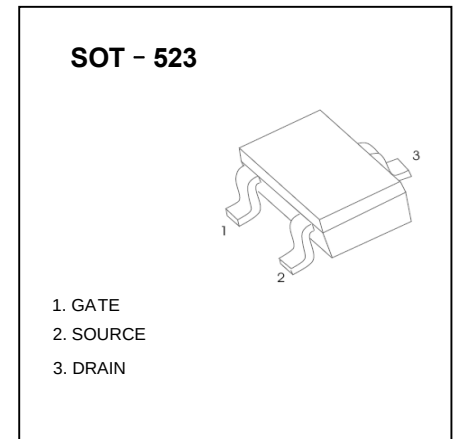

Maximum ratings ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 8	
Continuous Drain Current	I_D	-2.1	A
Pulsed Drain Current	I_{DM}	-4.8	
Continuous Source-Drain Diode Current	I_S	-0.72	
Maximum Power Dissipation	P_D	0.35	W
Thermal Resistance from Junction to Ambient($t \leq 5s$)	$R_{\theta JA}$	357	$^{\circ}\text{C/W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-55 ~+150	

Electrical characteristics (T_a=25°C unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-20			V
Gate-source threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =-250μA	-0.4		-1	
Gate-source leakage	I _{GSS}	V _{DS} =0V, V _{GS} =±8V			±100	nA
Zero gate voltage drain current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V			-1	μA
Drain-source on-state resistance ^a	R _{DS(on)}	V _{GS} =-4.5V, I _D =-1A		0.090	0.120	Ω
		V _{GS} =-2.5V, I _D =-0.5A		0.110	0.170	
Forward transconductance ^a	g _{fs}	V _{DS} =-5V, I _D =-1.8A		6.5		S
Dynamic ^b						
Input capacitance	C _{iSS}	V _{DS} =-10V,V _{GS} =0V,f =1MHz		405		pF
Output capacitance	C _{oSS}			75		
Reverse transfer capacitance	C _{rSS}			55		
Total gate charge	Q _g	V _{DS} =-10V,V _{GS} =-4.5V,I _D =-3A		5.5	10	nC
		V _{DS} =-10V,V _{GS} =-2.5V,I _D =-3A		3.3	6	
Gate-source charge	Q _{gs}			0.7		
Gate-drain charge	Q _{gd}			1.3		
Gate resistance	R _g	f =1MHz		6.0		Ω
Turn-on delay time	t _{d(on)}	V _{DD} =-10V, R _L =10Ω, I _D =-1A, V _{GEN} =-4.5V,R _g =1Ω		11	20	ns
Rise time	t _r			35	60	
Turn-off delay time	t _{d(off)}			30	50	
Fall time	t _f			10	20	
Drain-source body diode characteristics						
Continuous source-drain diode current	I _S	T _C =25°C			-1.3	A
Pulse diode forward current ^a	I _{SM}				-10	
Body diode voltage	V _{SD}	I _S =-0.7A		-0.8	-1.2	V

Notes :


a. Pulse Test : Pulse Width < 300μs, Duty Cycle ≤ 2%.

b. Guaranteed by design, not subject to production testing.


Output Characteristics

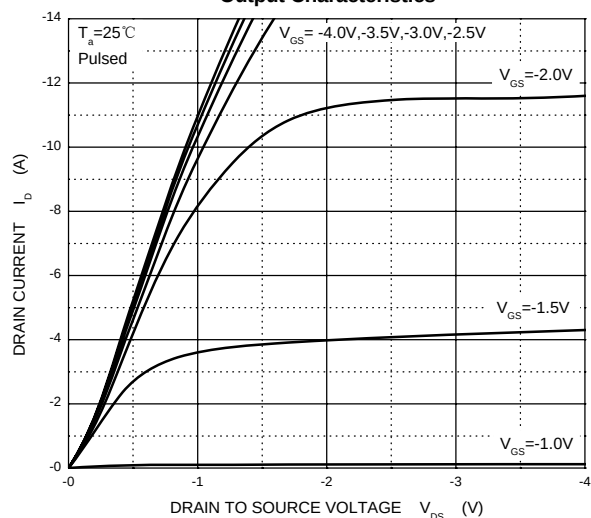


Transfer Characteristics

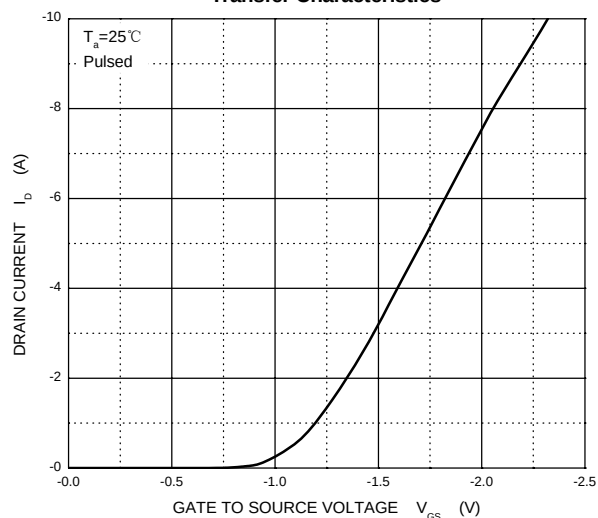


$R_{DS(ON)}$ — I_D

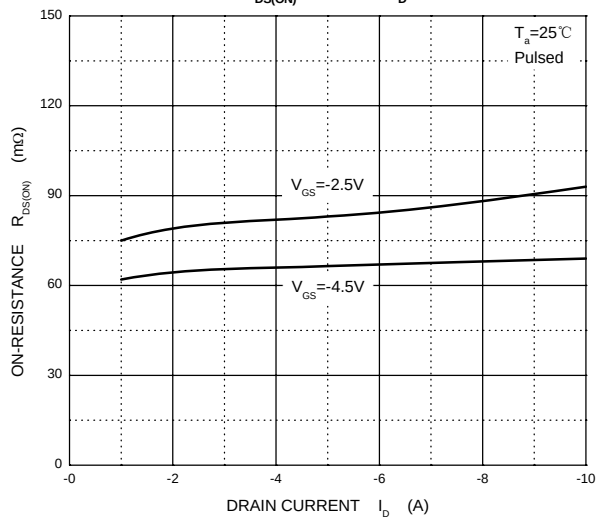


$R_{DS(ON)}$ — V_{GS}

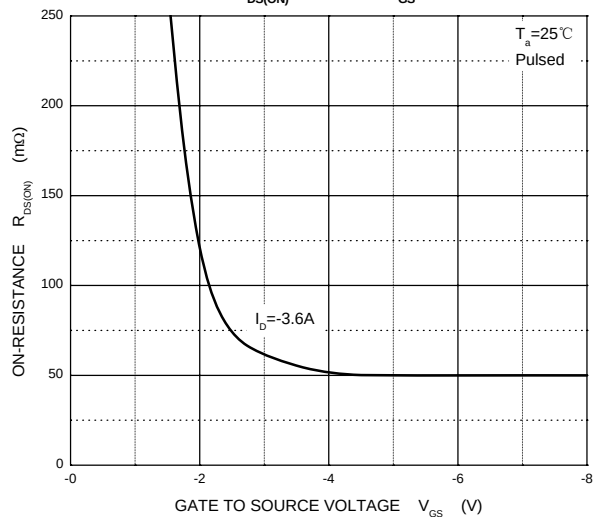

I_S — V_{SD}

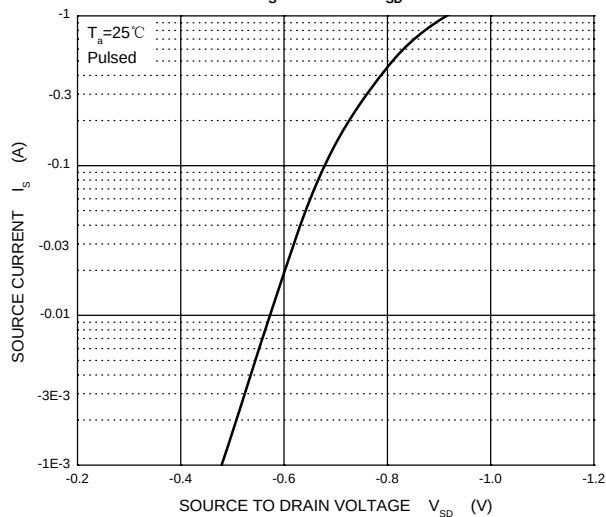

SOT-523 PACKAGE OUTLINE DIMENSIONS

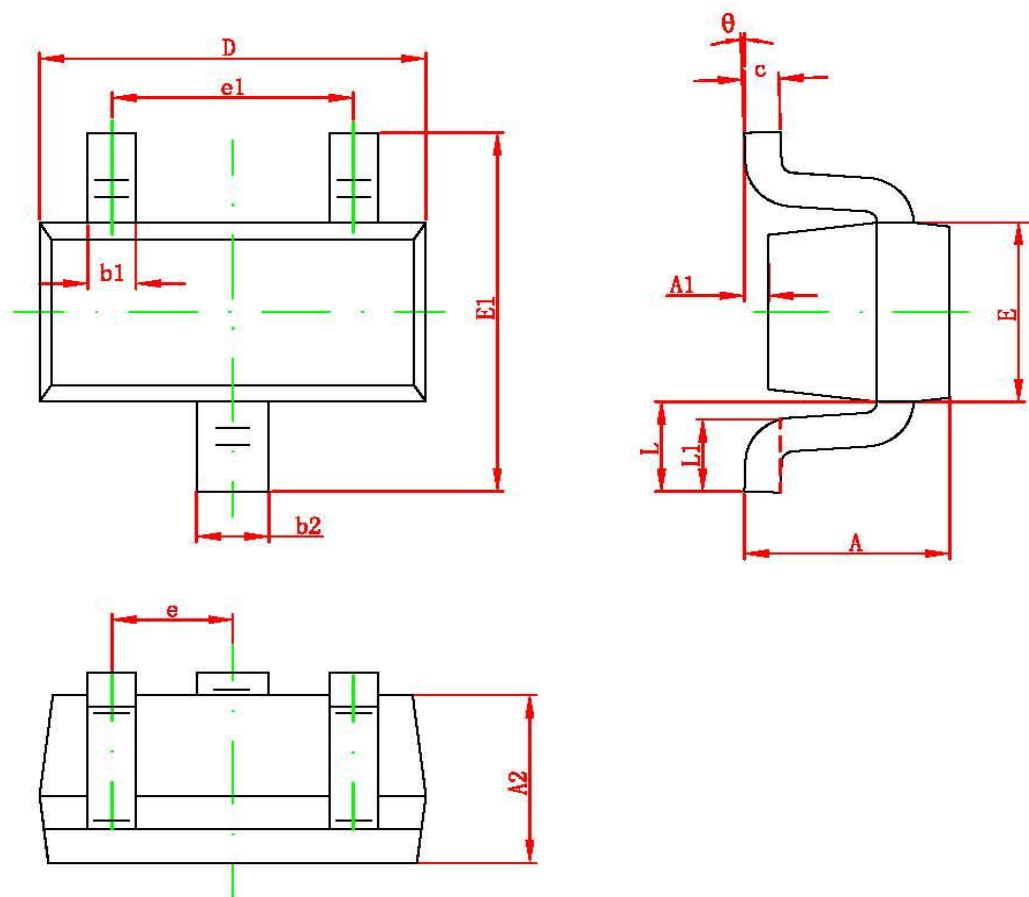

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500 TYP.		0.020 TYP.	
e1	0.900	1.100	0.035	0.043
L	0.400 REF.		0.016 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°