WEJ®

RoHS

SK32B-SK310B

Features

- For Surface Mount Applications
- Extremely Low Thermal Resistance
- Easy Pick And Place
- High Temp Soldering: 250°C for 10 Seconds At Terminals\
- High Current Capability With Low Forward Voltage

Maximum Ratings

- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 10°C/W Junction To Lead

MCC Catalog Number	Device Marking	Maximum Reccurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SK32B	SK32B	20V	14V	20V
SK33B	SK33B	30V	21V	30V
SK34B	SK34B	40V	28V	40V
SK35B	SK35B	50V	35V	50V
SK36B	SK36B	60V	42V	60V
SK38B	SK38B	80V	56V	80V
SK310B	SK310B	100V	70V	100V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	3.0A	T_J = 120°C
Peak Forward Surge Current	I_{FSM}	100A	8.3ms, half sine
Maximum Instantaneous Forward Voltage SK32B-34B SK35B-36B SK38B-310B	V_F	 .50V .75V .85V	 I_{FM} = 3.0A; T_J = 25°C*
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	.5mA 20mA	T_J = 25°C T_J = 100°C
Typical Junction Capacitance	C_J	45pF	Measured at 1.0MHz, V_R=4.0V

*Pulse test: Pulse width 200 μsec, Duty cycle 2%

DO-214AA
SMB

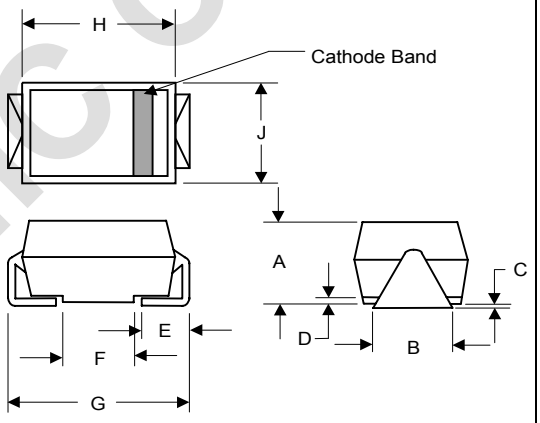

DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
A	.078	.116	1.98	2.95	
B	.075	.089	1.90	2.25	
C	.002	.008	.05	.20	
D	-----	.02	-----	.51	
E	.035	.055	.90	1.40	
F	.065	.091	1.65	2.32	
G	.205	.224	5.21	5.69	
H	.160	.180	4.06	4.57	
J	.130	.155	3.30	3.94	

SUGGESTED SOLDER PAD LAYOUT

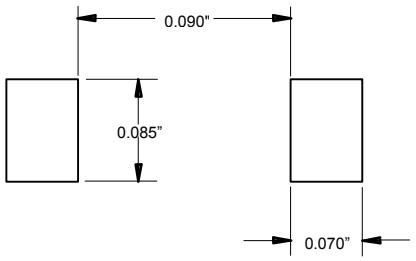

WEJ ELECTRONIC CO.,LTD

Figure 1
Typical Forward Characteristics

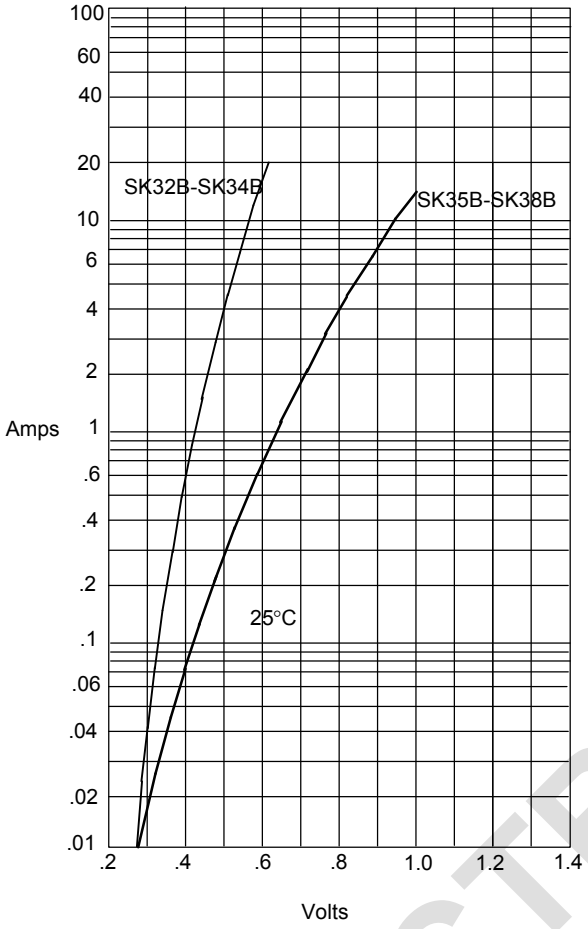

Instantaneous Forward Current - Amperes*versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

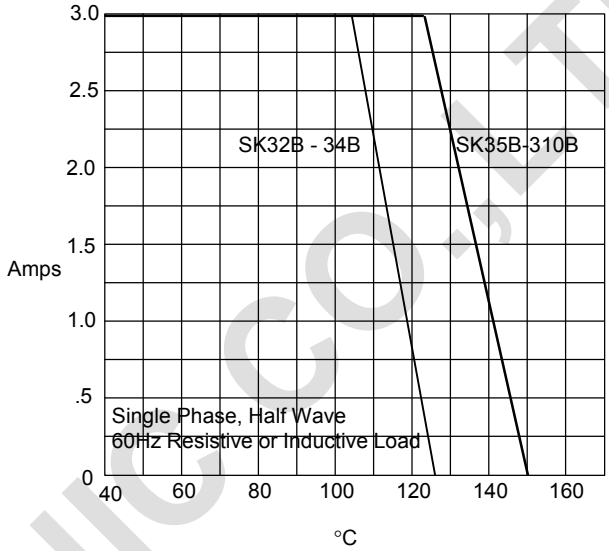

Average Forward Rectified Current - Amperes*versus*
Ambient Temperature -°C

Figure 3
Junction Capacitance

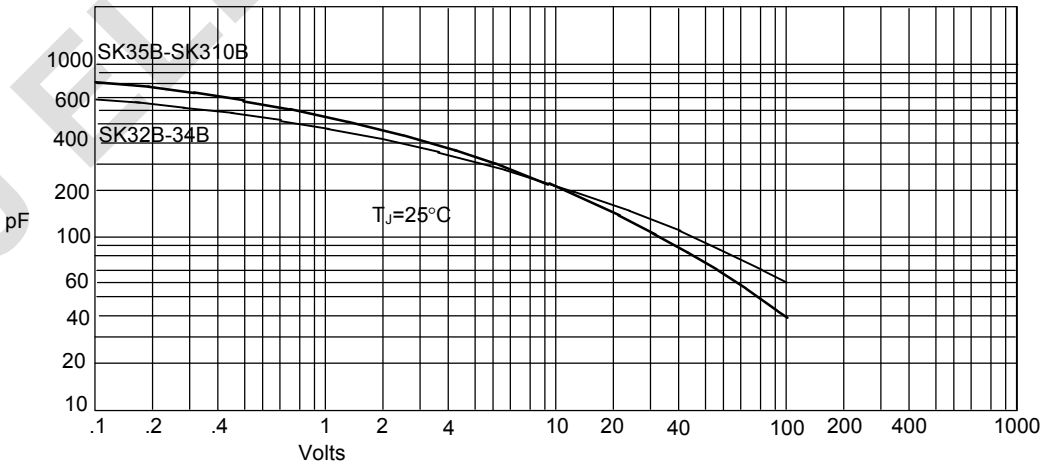

Junction Capacitance - pF*versus*
Reverse Voltage - Volts

WEJ ELECTRONIC CO.,LTD

Figure 4
Typical Reverse Characteristics

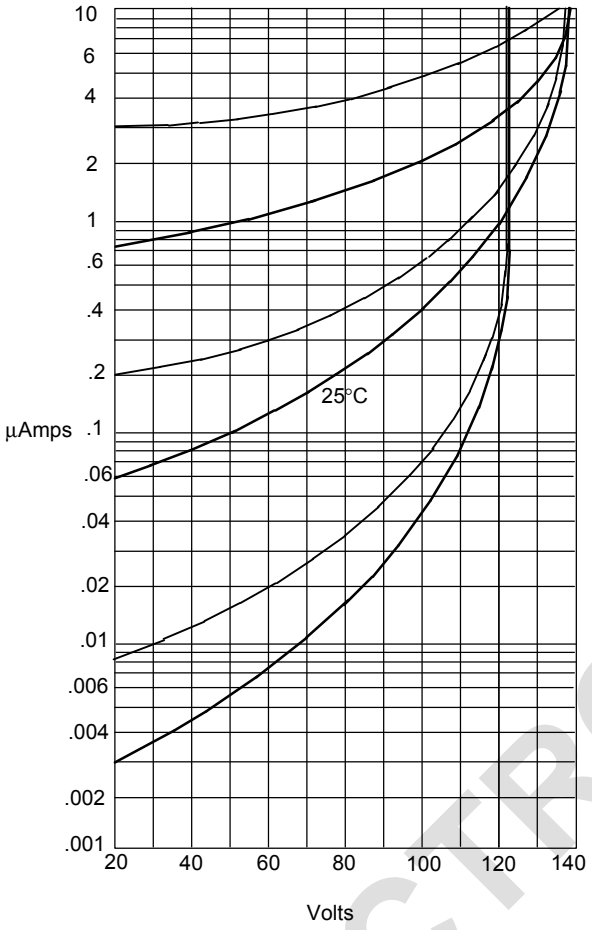

Instantaneous Reverse Leakage Current - MicroAmperes *versus*
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
Peak Forward Surge Current

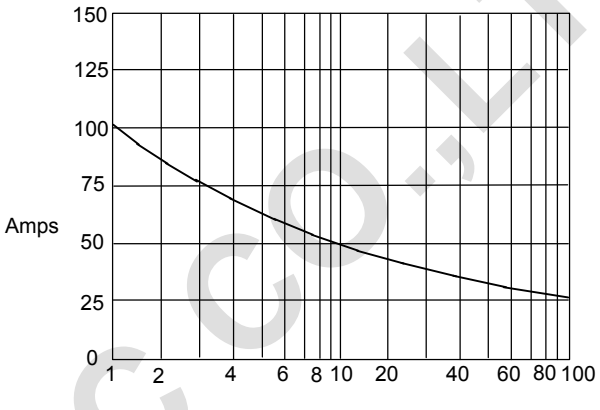

Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles

WEJ ELECTRONIC CO.,LTD