
SK52 THRU SK525

5.0 AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

Features

- Low Power Loss,High Efficiency
- Ideally Suited for Automatic Assembly
- For Use in Low Voltage Application
- Plastic Case Material has UL Flammability Classification Rating 94V-0

SMB/DO-214AA

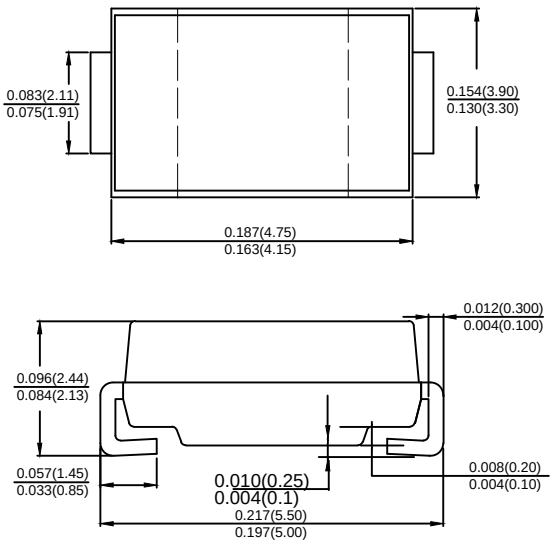

Dimensions in inches and (millimeters)

Mechanical Data

- Case: Molded plastic SMB
- Terminals: Plated leads solderable per MIL-STD-750,Method 2026 guaranteed
- Polarity: Color band dentes cathode end
- Mounting Position: Any
- Making: Type Number

Maximum Ratings and Electrical Characteristics

Rating at 25℃ ambient temperature unless otherwise specified

Single phase,half wave,60Hz,resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	SK 52	SK 53	SK 54	SK 545	SK 55	SK 56	SK 58	SK 510	SK 515	SK 520	SK 525	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	45	50	60	80	100	150	200	250	V
Maximum RMS Voltage	V_{RMS}	14	21	28	31	35	42	56	70	105	140	175	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	45	50	60	80	100	150	200	250	V
Average Rectified Output Current @T_L =90℃	I_O	5.0											A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	100											A
Forward Voltage @IF=5.0A (Note 1)	V_{FM}	0.55				0.7		0.85		0.92		0.95	V
Peak Reverse Current @T_A =25℃	I_R	0.1						0.05					mA
At Rated DC Blocking Voltage @T_A =100℃		10						5					
Typical Junction Capacitance (Note 2)	C_J	12											pF
Typical Thermal Resistance per leg (Note 2)	$R_{\theta JA}$	95											℃/W
Operating Temperature Range	T_J	-55 to+150											℃
Storage Temperature Range	T_{STG}	-55 to +150											℃

Note: 1.Pulse Test with PW=300usec,1%Duty Cycle.

2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C

SK52 THRU SK525

Fig. 1 Forward Current Derating Curve

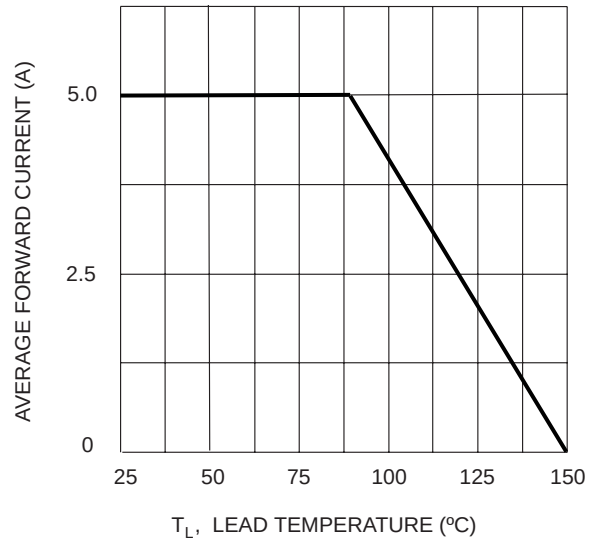


Fig. 2 Typ. Forward Characteristics

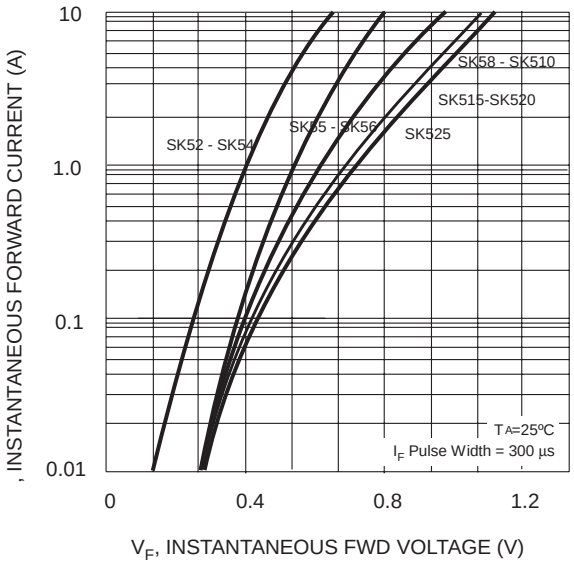


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

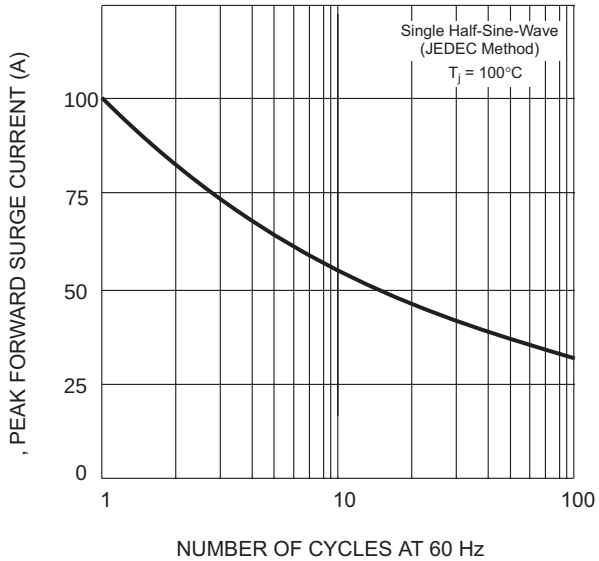


FIG.4TYPICALREVERSE CHRACTERISTIC

