
SKM 200GB125D

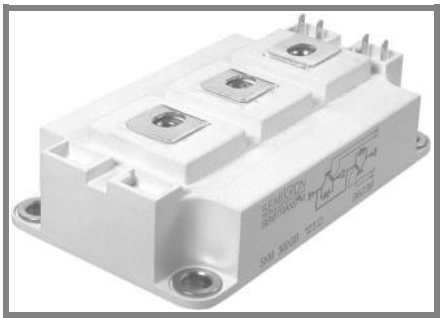

SEMITRANS® 3

Ultra Fast IGBT Modules

SKM 200GB125D

SKM 200GAL125D


SKM 200GAR125D

Features

- N channel , homogeneous Si
- Low inductance case
- Short tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (13 mm) and creepage distance (20 mm)

Typical Applications

- Switched mode power supplies at f_{sw} > 20 kHz
- Resonant inverters up to 100 kHz
- Inductive heating
- Electronic welders at f_{sw} > 20 kHz

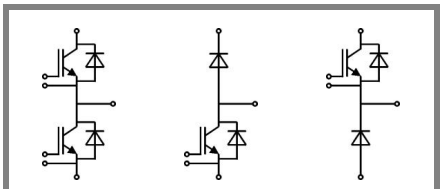

GB GAL GAR

Absolute Maximum Ratings T_c = 25 °C, unless otherwise specified


Symbol	Conditions		Values	Units
IGBT				
V_{CES}	T_j = 25 °C		1200	V
I_C	T_j = 150 °C	T_{case} = 25 °C	200	A
		T_{case} = 80 °C	160	A
I_{CRM}	I_{CRM}=2xI_{Cnom}		300	A
V_{GES}			± 20	V
t_{psc}	V_{CC} = 600 V; $V_{GE} \leq$ 20 V; V_{CES} < 1200 V	T_j = 125 °C	10	µs
Inverse Diode				
I_F	T_j = 150 °C	T_{case} = 25 °C	200	A
		T_{case} = 80 °C	130	A
I_{FRM}	I_{FRM}=2xI_{Fnom}		300	A
I_{FSM}	t_p = 10 ms; sin.	T_j = 150 °C	1440	A
Freewheeling Diode				
I_F	T_j = °C	T_c = 25 °C	200	A
		T_c = 80 °C	130	A
I_{FRM}	I_{FRM}=2xI_{Fnom}		300	A
I_{FSM}	t_p = 10 ms;	T_j = 150 °C	1440	A
Module				
$I_{t(RMS)}$			500	A
T_{vj}			- 40...+ 150	°C
T_{stg}			- 40...+ 125	°C
V_{isol}	AC, 1 min.		4000	V

Characteristics T_c = 25 °C, unless otherwise specified

Symbol	Conditions		min.	typ.	max.	Units
IGBT						
$V_{GE(th)}$	V_{GE} = V_{CE}, I_C = 6 mA		4,5	5,5	6,5	V
I_{CES}	V_{GE} = 0 V, V_{CE} = V_{CES}	T_j = 25 °C		0,15	0,45	mA
V_{CE0}		T_j = 25 °C		1,5	1,75	V
		T_j = 125 °C				V
r_{CE}	V_{GE} = 15 V	T_j = 25°C		12	14	mΩ
		T_j = 125°C				mΩ
$V_{CE(sat)}$	I_{Cnom} = 150 A, V_{GE} = 15 V	T_j = °$C_{chiplev.}$		3,3	3,85	V
C_{ies}	V_{CE} = 25, V_{GE} = 0 V	f = 1 MHz		10	13	nF
C_{oes}				1,5	2	nF
C_{res}				0,8	1,2	nF
Q_G	V_{GE} = 0V - +20V			1300		nC
R_{Gint}	T_j = °C			2,5		Ω
$t_{d(on)}$	R_{Gon} = 4 Ω	V_{CC} = 600V		75		ns
t_r		I_{Cnom}= 150A		36		ns
E_{on}		T_j = 125 °C		14		mJ
$t_{d(off)}$	R_{Goff} = 4 Ω	V_{GE} = ±15V		420		ns
t_f				25		ns
E_{off}						mJ
$R_{th(j-c)}$	per IGBT				0,09	K/W

© by SEMIKRON

SKM 200GB125D

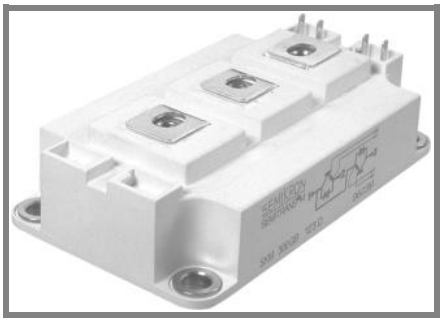

SEMITRANS® 3

Ultra Fast IGBT Modules

SKM 200GB125D

SKM 200GAL125D


SKM 200GAR125D

Features

- N channel , homogeneous Si
- Low inductance case
- Short tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (13 mm) and creepage distance (20 mm)

Typical Applications

- Switched mode power supplies at f_{sw} > 20 kHz
- Resonant inverters up to 100 kHz
- Inductive heating
- Electronic welders at f_{sw} > 20 kHz

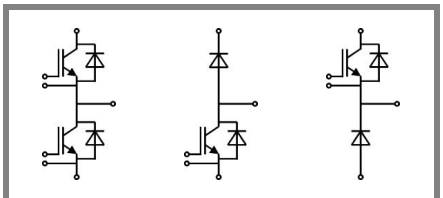

GB GAL GAR


Characteristics

Symbol	Conditions		min.	typ.	max.	Units
Inverse Diode						
$V_F = V_{EC}$	I_{Fnom} = 150 A; V_{GE} = 0 V	T_j = 25 °$C_{chiplev.}$		2	2,5	V
		T_j = 125 °$C_{chiplev.}$		1,8		V
V_{F0}		T_j = 25 °C		1,1	1,2	V
		T_j = 125 °C				V
r_F		T_j = 25 °C		6	8,7	mΩ
		T_j = 125 °C				mΩ
I_{RRM}	I_{Fnom} = 150 A	T_j = 125 °C		230		A
Q_{rr}	di/dt = 5500 A/µs			24		µC
E_{rr}	V_{GE} = 0 V; V_{CC} = 600 V					mJ
$R_{th(j-c)D}$	per diode				0,25	K/W
Freewheeling Diode						
$V_F = V_{EC}$	I_{Fnom} = 150 A; V_{GE} = 0 V	T_j = 25 °$C_{chiplev.}$		2	2,5	V
		T_j = 125 °$C_{chiplev.}$		1,8		V
V_{F0}		T_j = 25 °C		1,1	1,2	V
		T_j = 125 °C				V
r_F		T_j = 25 °C		6	8,7	V
		T_j = 125 °C				V
I_{RRM}	I_{Fnom} = 150 A	T_j = 125 °C		230		A
Q_{rr}	di/dt = 5500 A/µs			24		µC
E_{rr}	V_{GE} = 0 V; V_{CC} = 600 V					mJ
$R_{th(j-c)FD}$	per diode				0,25	K/W
Module						
L_{CE}				15	20	nH
$R_{CC'+EE'}$	res., terminal-chip	T_{case}= 25 °C		0,35		mΩ
		T_{case}= 125 °C		0,5		mΩ
$R_{th(c-s)}$	per module				0,038	K/W
M_s	to heat sink M6		3		5	Nm
M_t	to terminals M6		2,5		5	Nm
w					325	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

 © by SEMIKRON

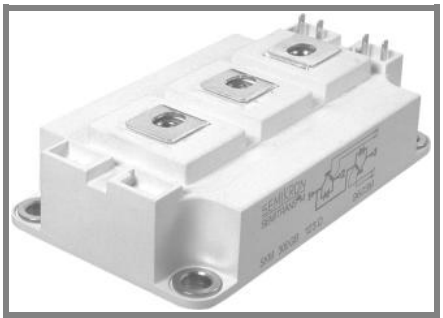

SEMITRANS® 3

Ultra Fast IGBT Modules

SKM 200GB125D

SKM 200GAL125D


SKM 200GAR125D

Features

- N channel , homogeneous Si
- Low inductance case
- Short tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (13 mm) and creepage distance (20 mm)

Typical Applications

- Switched mode power supplies at f_{sw} > 20 kHz
- Resonant inverters up to 100 kHz
- Inductive heating
- Electronic welders at f_{sw} > 20 kHz

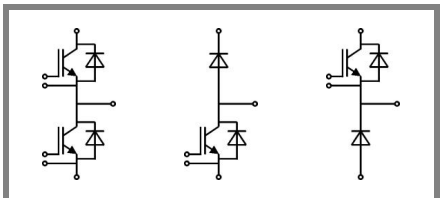

GB **GAL** **GAR**

Z_{th} Symbol	Conditions	Values	Units
$Z_{th(j-c)I}$			
R_i	i = 1	60	mk/W
R_i	i = 2	23	mk/W
R_i	i = 3	5,9	mk/W
R_i	i = 4	1,1	mk/W
tau_i	i = 1	0,0744	s
tau_i	i = 2	0,0087	s
tau_i	i = 3	0,002	s
tau_i	i = 4	0,0015	s
$Z_{th(j-c)D}$			
R_i	i = 1	160	mk/W
R_i	i = 2	67	mk/W
R_i	i = 3	20	mk/W
R_i	i = 4	3	mk/W
tau_i	i = 1	0,0536	s
tau_i	i = 2	0,0034	s
tau_i	i = 3	0,077	s
tau_i	i = 4	0,0003	s

 © by SEMIKRON

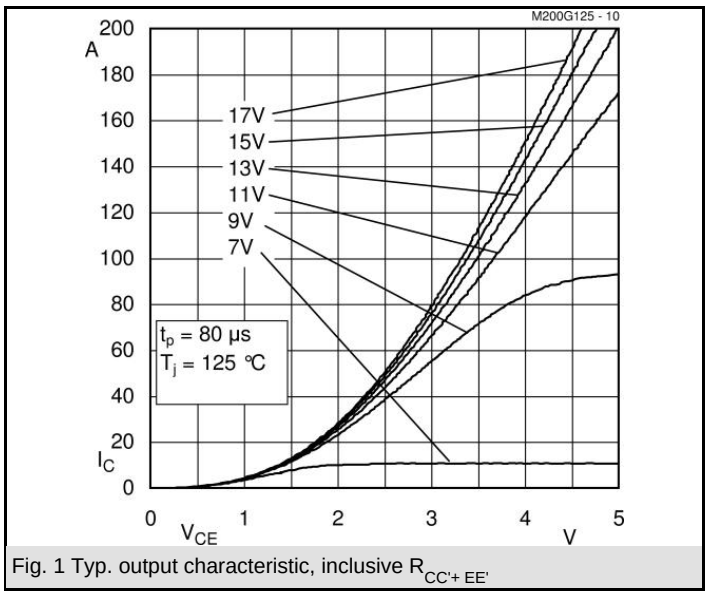


Fig. 1 Typ. output characteristic, inclusive $R_{CC'+EE'}$

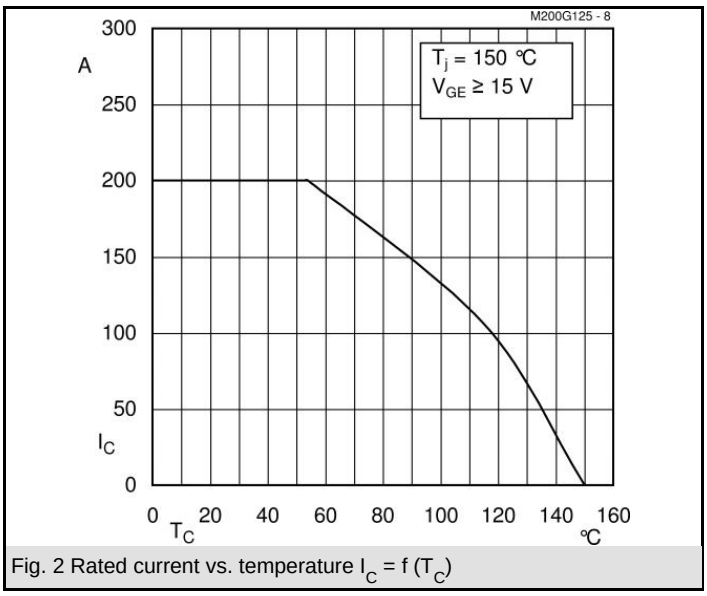


Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

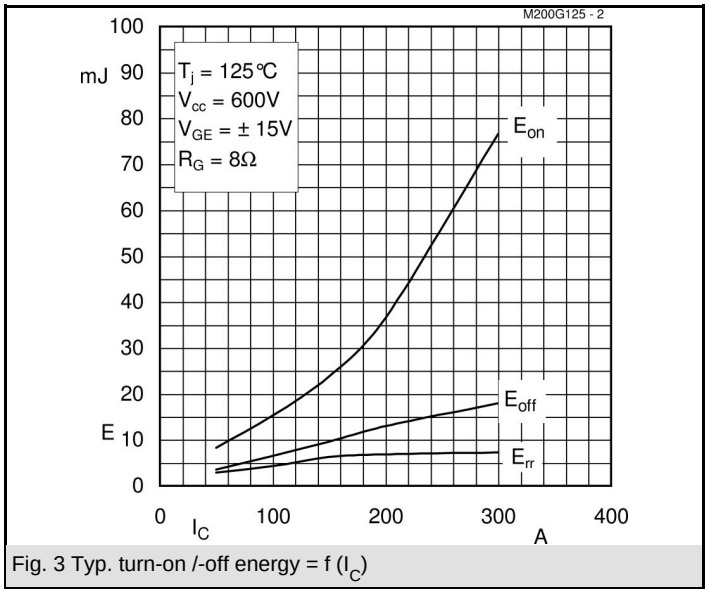


Fig. 3 Typ. turn-on /-off energy = f (I_C)

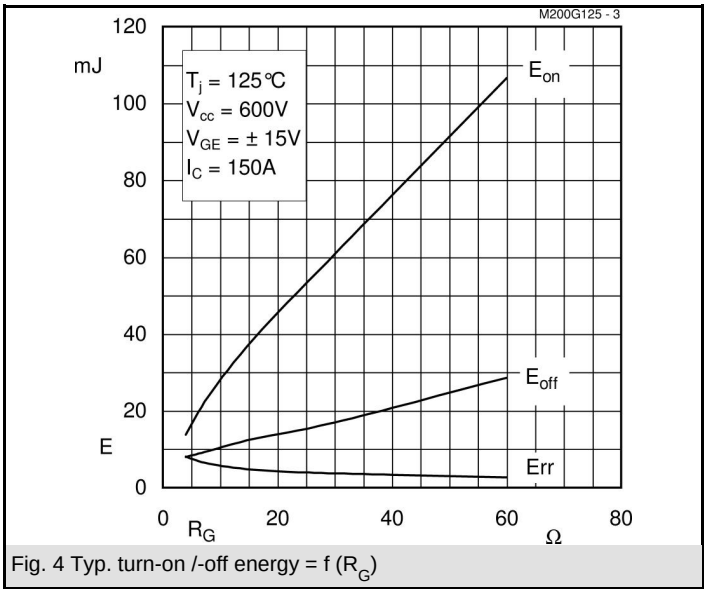


Fig. 4 Typ. turn-on /-off energy = f (R_G)

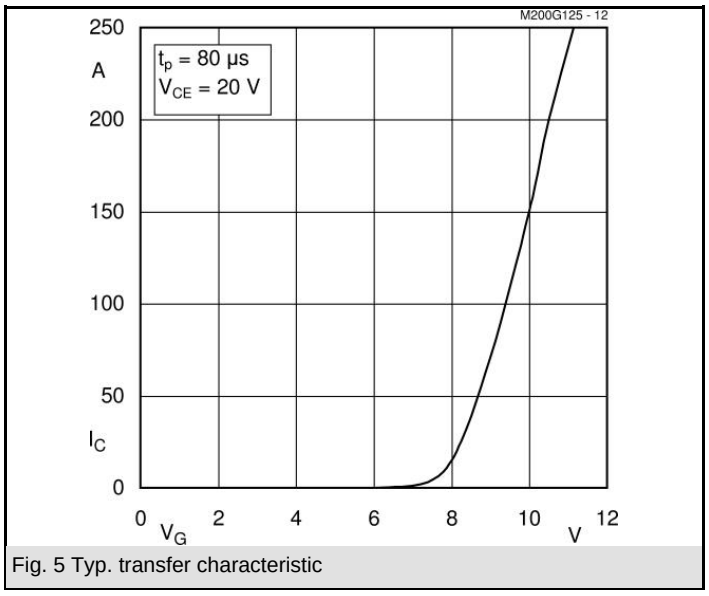


Fig. 5 Typ. transfer characteristic

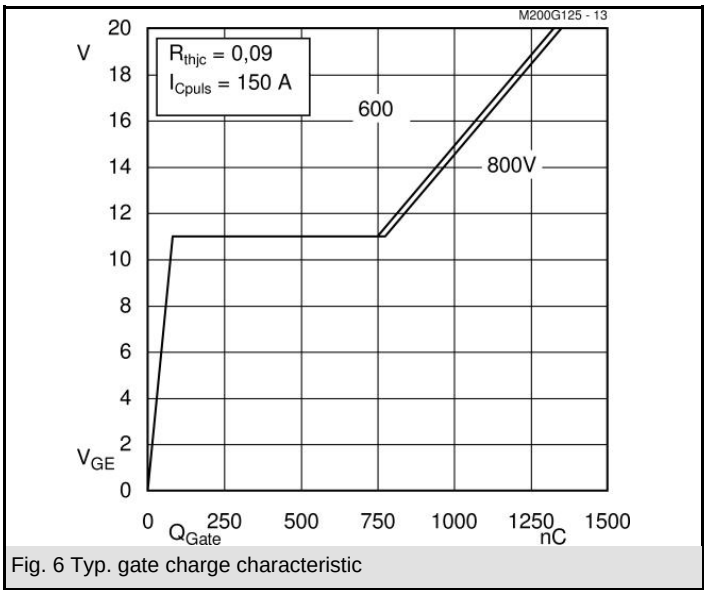


Fig. 6 Typ. gate charge characteristic

 © by SEMIKRON

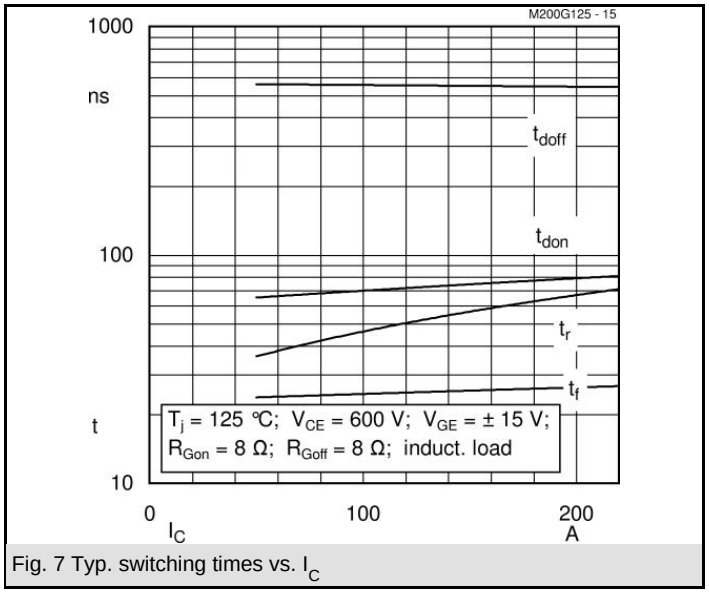


Fig. 7 Typ. switching times vs. I_C

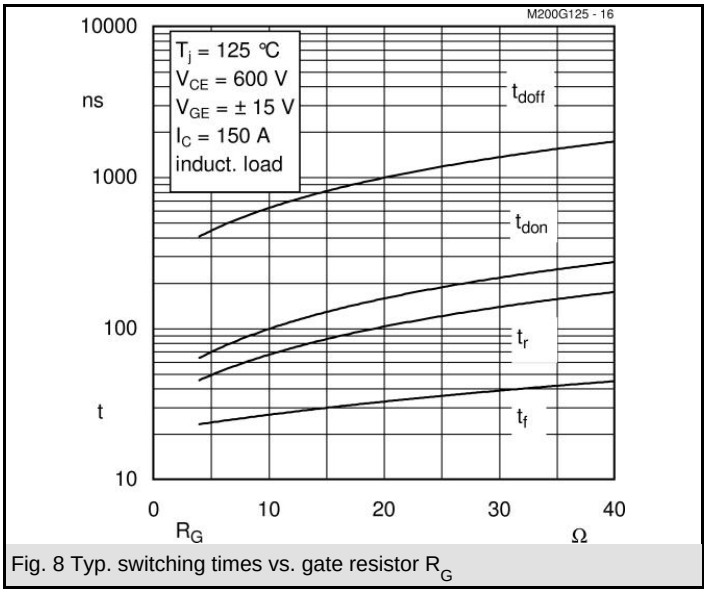


Fig. 8 Typ. switching times vs. gate resistor R_G

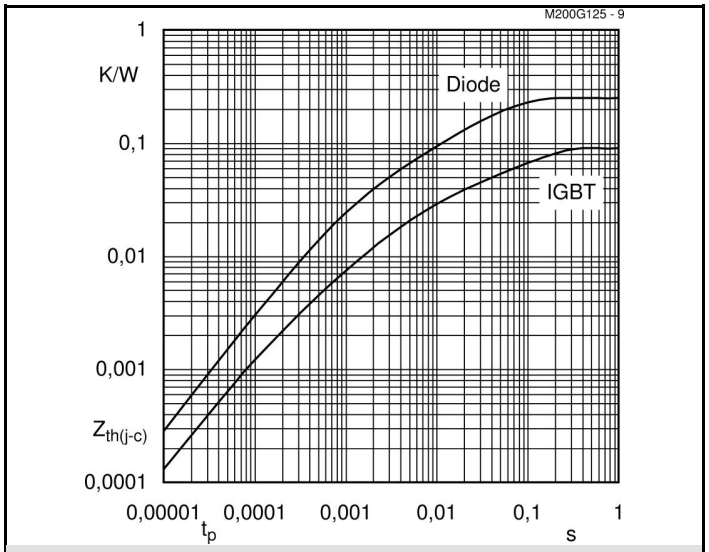


Fig. 9 Transient thermal impedance

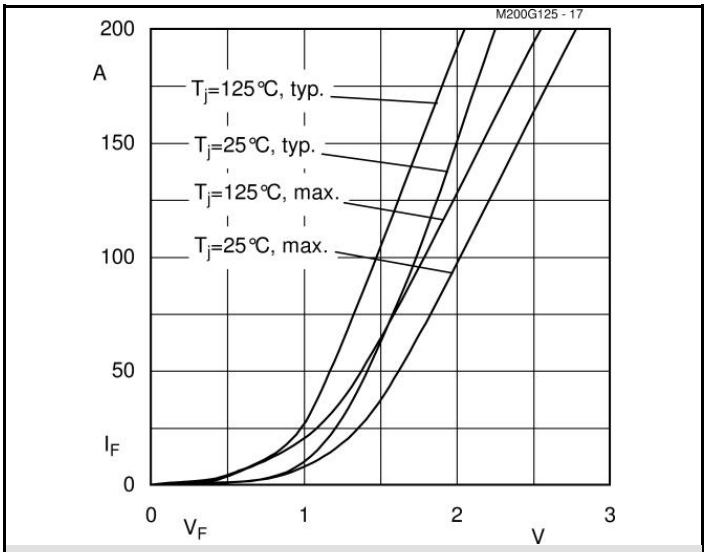


Fig. 10 CAL diode forward characteristic

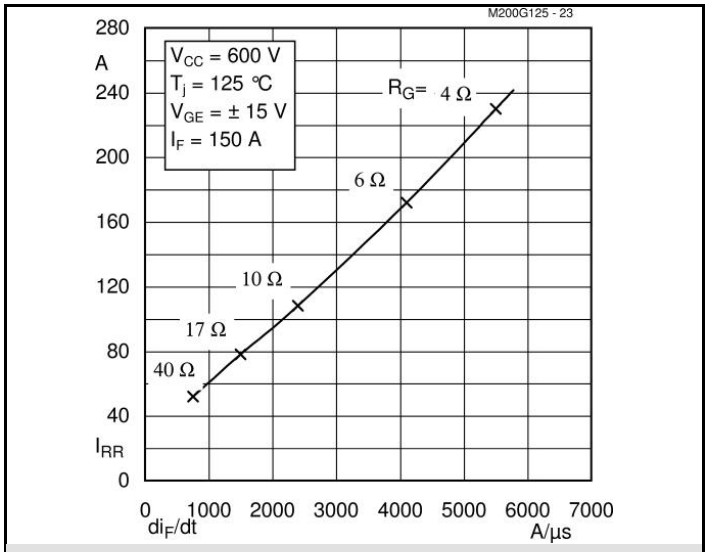


Fig. 11 Typ. CAL diode peak reverse recovery current


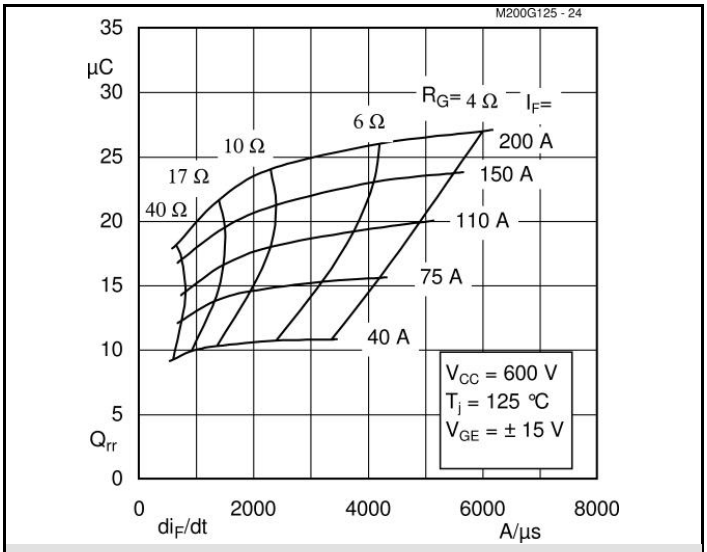



Fig. 12 Typ. CAL diode peak reverse recovery charge

 © by SEMIKRON


UL Recognized File 63 532

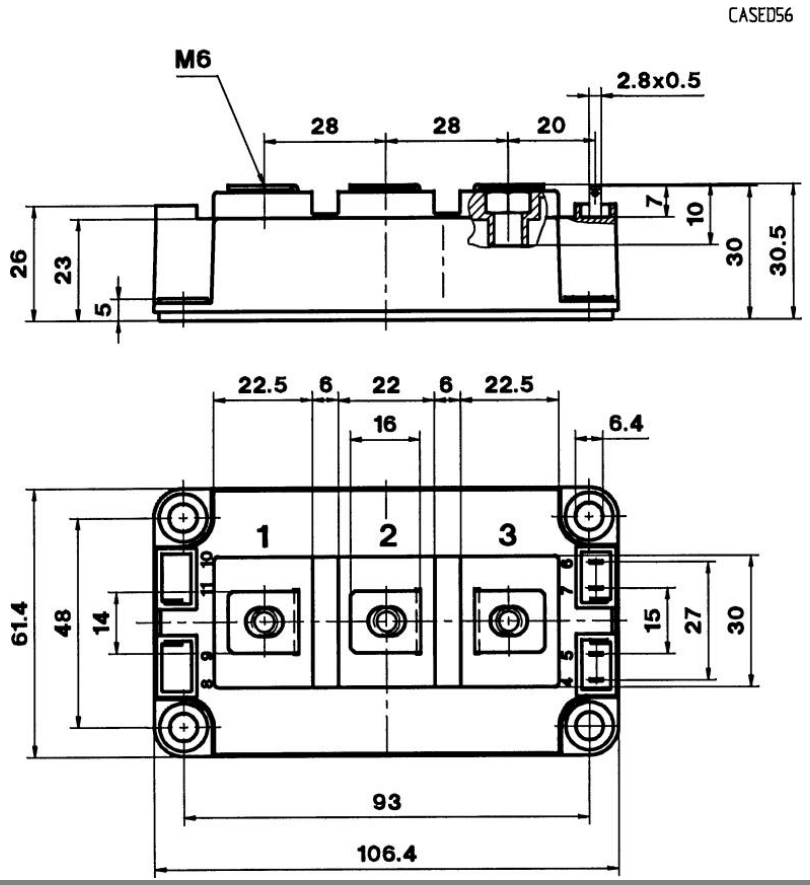


Case D 56

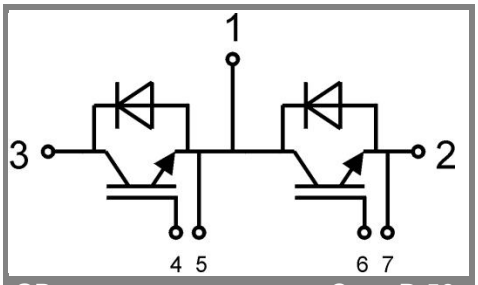

GB Case D 56

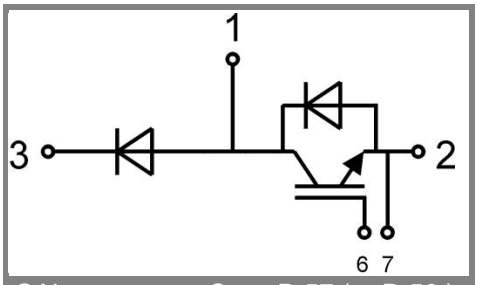

GAL Case D 57 (➞ D 56)

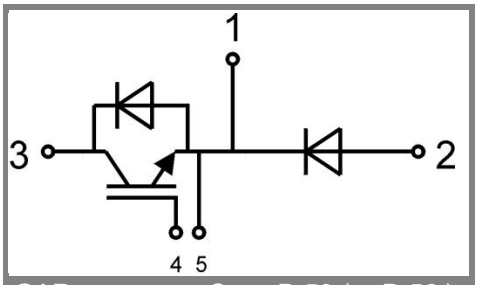

GAR Case D 58 (➞ D 56)

 © by SEMIKRON