

A.D.A compliant



Specification

All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content.#356 alloy.)

Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.

- 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- 98% P.F.electronic smart ballast with end of life detection for compact fluorescent.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.

- 1 - One piece cast aluminum removable housing for ease of access to lamp and ballast.
- 2- White translucent sealed high impact acrylic diffuser.
- 3 - Isolated ballast compartment for compact fluorescent electronic ballast.
- 4- Multiple cast aluminum louver blades built in assembly.

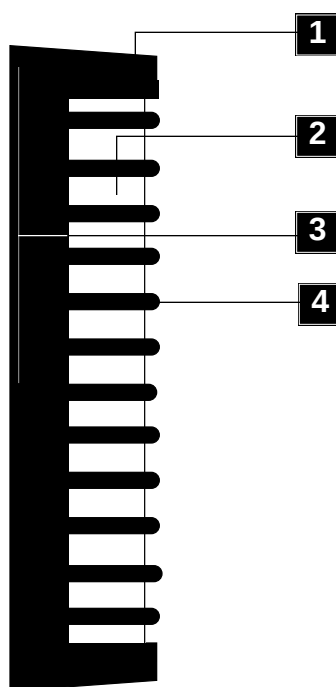


Ceiling mount



Horizontal mount

Photometry




Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on www.luminis.com.

Certification

UL. Wet Location.

Mounting

Max. weight: 6 lbs.
Installation: Mounts over a standard 4" octagonal electrical box with 3 1/2" c/c mounting holes.
(by others) additional separate mounting holes are provided with wall plate.

Model#	Light source selection	Voltage	Finish	Options
☐ SL100	PL-L 2G11 Single lamp ☐ F124 (1x24W)	COMP. FLUO. Smart ballast 120/277 ☐ 347 V (To specify)	<u>Standard selection</u> ☐ WHT : Snow white ☐ BKT : Jet black ☐ BZT : Bronze ☐ GRT : Titanium gray ☐ DGT : Gun metal ☐ CHT : Champagne ☐ MST : Matte silver ☐ GNT : Forest green <u>Optional colors</u> ☐ CS : Custom color ☐ RAL : RAL# color	☐ SC Round column adaptor  Indicate column diameter in inches. 12" Min. dia. Ex: SC24 (24"Dia..)
	(Lamps by others)			

luminaires may be altered for design improvements or discontinued without prior notice.