


TECHNICAL DATA SHEET

Rosenberger

Cable Clamp

SLCC1X2-0711

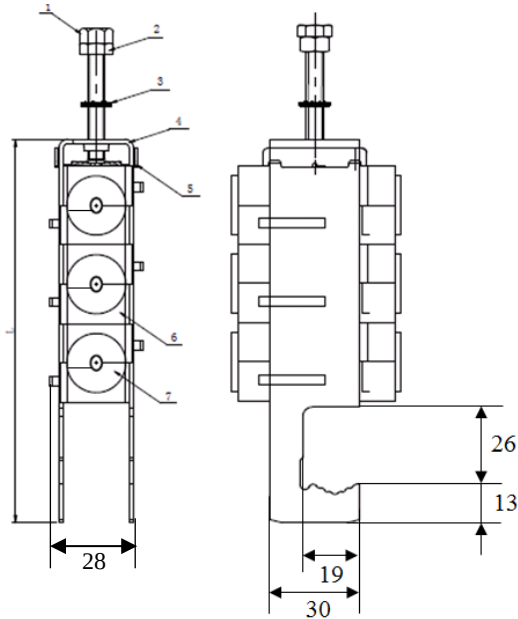

All dimensions are in mm, tolerances acc. To ISO 2768 c-H

Description

To install multiple cable runs on towers where space is limited. Without additional adapters, these clamps can provide sturdy, reliable, long-term support by means of tough and UV resistant material.

Part number

Part number	L	Cable	Weight [g]	Hex Wrench
SLCC112-0711	76.5	1x 7-11mm	95	10
SLCC122-0711	103	2x 7-11mm	125	
SLCC132-0711	129	3x 7-11mm	150	

Parts list

Number	Piece parts	Material
1	Threaded rod M6	Stainless steel SUS304
2	Nut M6	Stainless steel SUS304
3	Plain washer	Stainless steel SUS304
4	Metal-Frame	Stainless steel SUS304
5	Metal-Plate	Stainless steel SUS304
6	Plastic cable clamp	Nylon
7	Insert	Rubber

Environmental data

Temperature	-40°C to +70°C
Salt spray test	96 hr. acc. to MIL-STD-1344:1977 Method 1001.1
UV resistance	300 hr. acc. to ISO 4892-2:2006(E) Method A
RoHS	compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
E. Truc-Vallet	12.11.15	J. Gramsamer	18/01/16	100	16-0005	SL	18/01/16
Rosenberger Hochfrequenztechnik GmbH & Co. KG, Germany Tel.: +49 8684 18-0 www.rosenberger.de email: info@rosenberger.de				Rosenberger Asia Pacific Electronic Co., Ltd., China Tel.: +86 10 80481995 Fax: +86 10 80497052 www.rosenbergerap.com email: info@rosenbergerap.com			Page 1 / 1