Type: SM-10F


◆ Product Description

- 11.0×11.0mm Max.(L×W), 16.0mm Max. Height.
- Operating frequency: 30MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

◆ Feature


- High inductance fixed shielded type.
- Can be used as DC-DC converter transformer.
- RoHS Compliance

◆ Dimensions (mm)

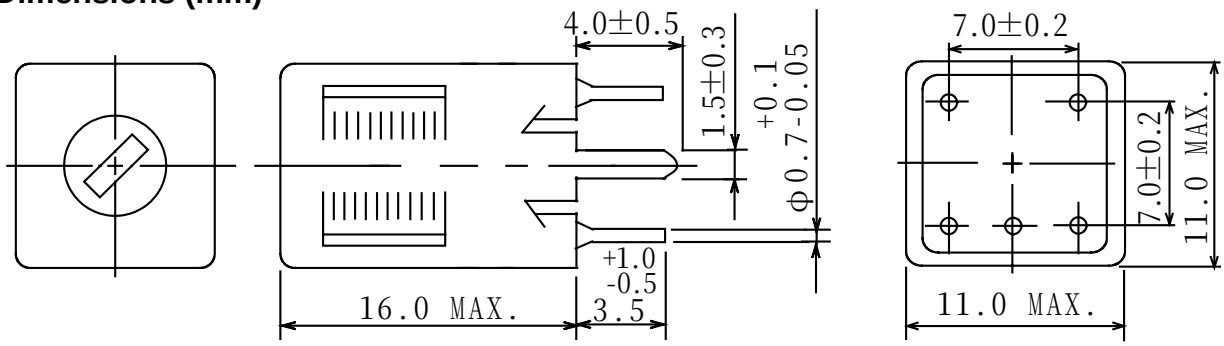

＊ Dimension does not include solder used on coil.
＊ Pin pitch should be measured at the root of terminal.

◆ Connection (Bottom View)



"S" is winding start.

◆ Specification (Part No.: 4309-T001)

Item	(4-6)	Measuring Condition
Inductance	850μH±6% Variable	1kHz
Unloaded Qu	60 Min.	100kHz