


The **SM2527-34HS** is a 2.5 to 2.7 GHz solid state GaAs FET amplifier designed for the Multichannel Multipoint Distribution System (MMDS) market. The output power (P1dB) is +34 dBm, the OIP3 is +47 dBm, and the Linear Gain is 33 dB. The unit uses the latest surface mount technologies to provide numerous features, while maintaining a very small size.

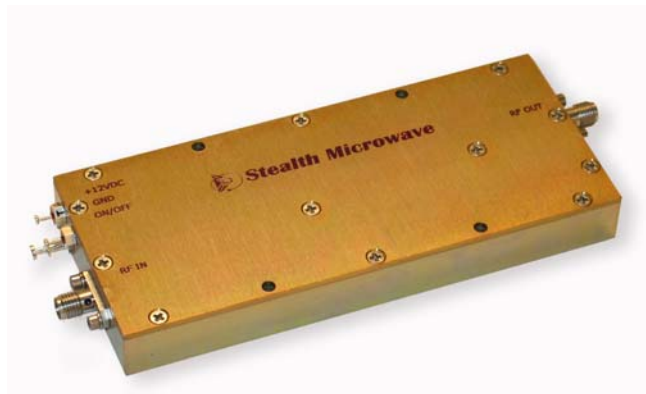

Features

- Over Voltage Protection
- Thermal Protection with Auto Reset

Options

- Single Power Supply
- Logic On/Off Control
- Heatsink

Configurations

- Module
- 19" Rack

Parameter	Specification
Frequency Range	2.5 – 2.7 GHz
Pout (P1dB)	+ 34 dBm
Third Order Intercept Point	+ 47 dBm (typ.)
Linear Gain	33 dB $\pm$ 1.0 dB
Gain Flatness over Full Band	$\pm$.5 dB
Input/Output Return Loss	-16 dB / -16 dB
DC Input Voltage	+10 Volts (+12 V Operation Available)
DC Input Current	1.2 Amperes (typ.) 1.4 Amperes (max.)
Mechanical Dimensions	4.7 x 2.0 x .54 inches
RF Connectors	SMA Female
Operating Temperature	0°C to +55°C
Operating Humidity	95% Non-condensing
Operating Altitude	Up to 10,000 feet above Sea Level

