


## Packaging Information / Reference Pattern Layout Dimensions


### ●SMA

Unit: mm

### ■Packaging Information

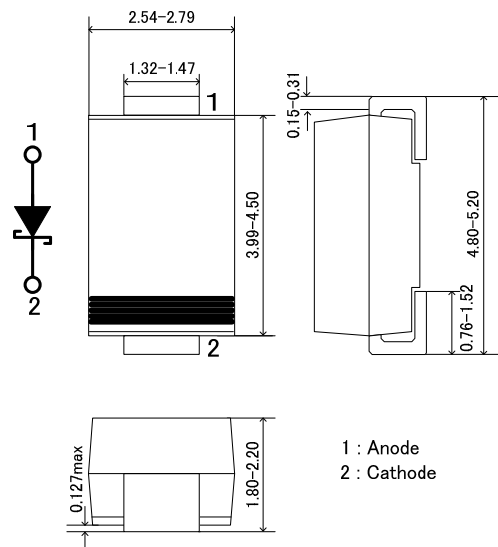


### ■Reference Pattern Layout Dimensions

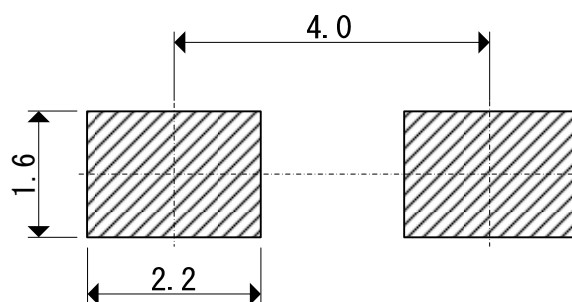



## Taping Specifications

### ●SMA Reel

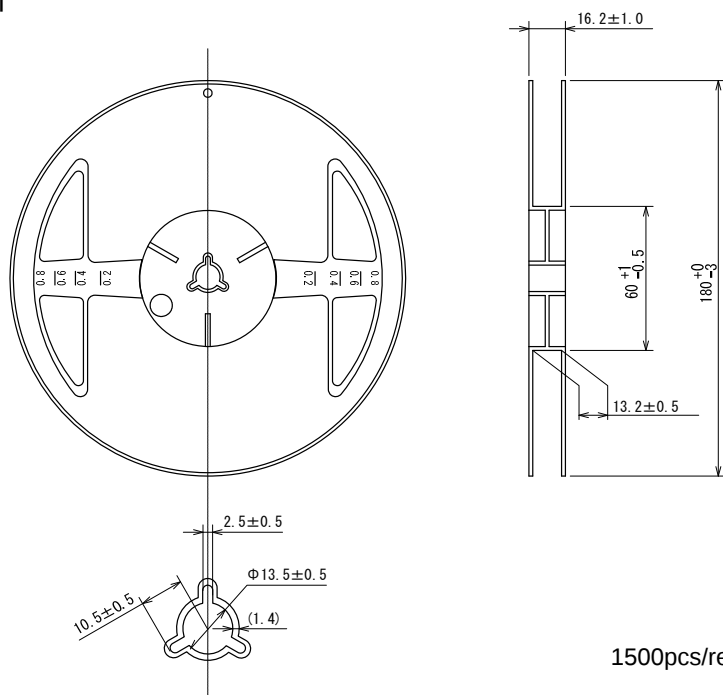

1500pcs/reel

### ●Taping Specifications

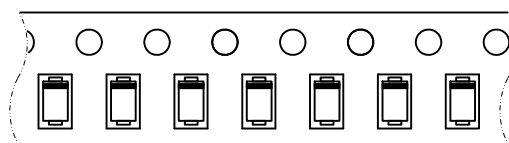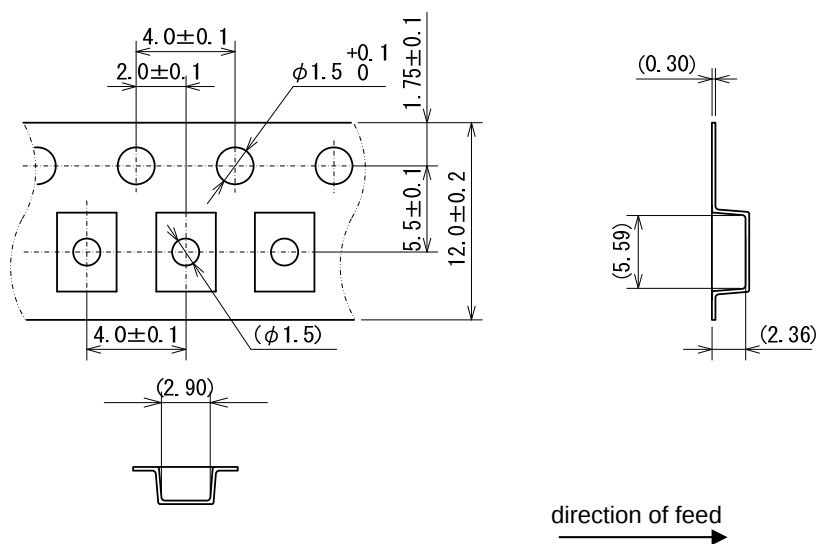


R Type : [Device orientation : Right]

Standard feed

SMA構造図  
SMA Perspective

TOIREX

RoHS対応品  
RoHS Compliance

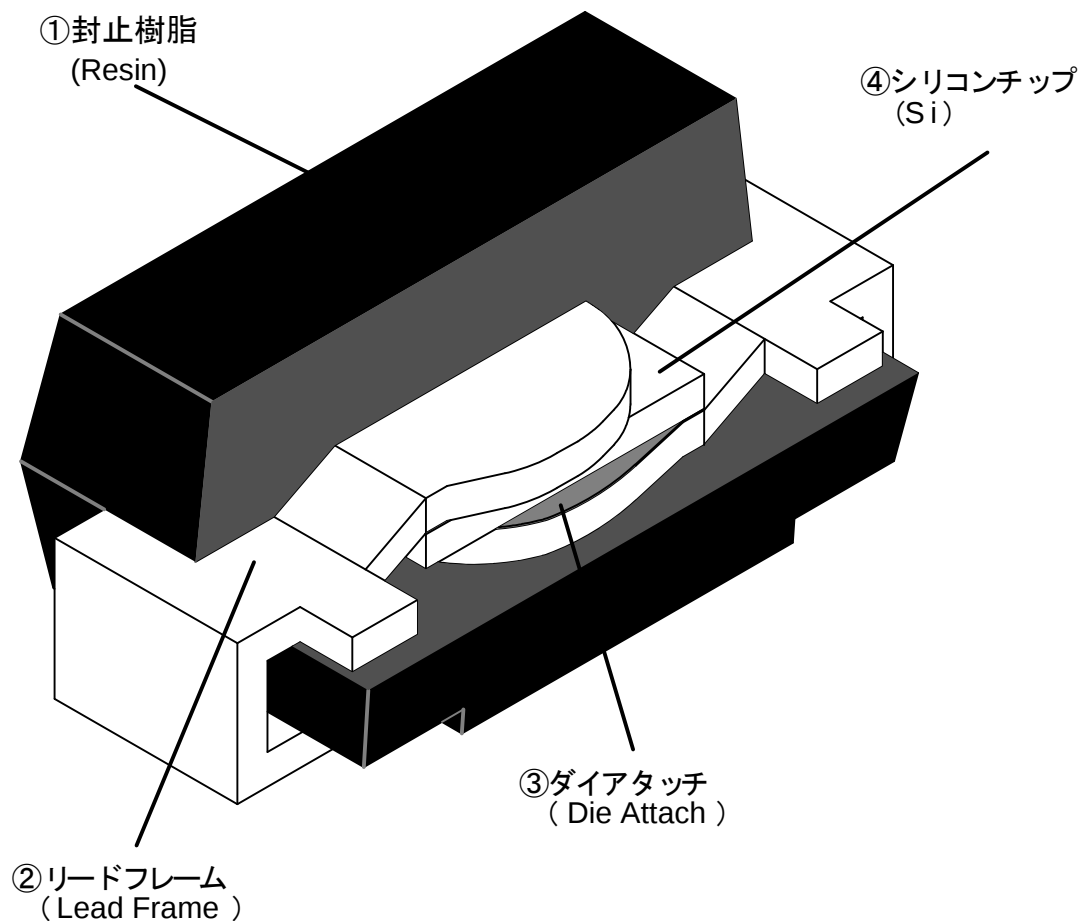

| 項 目<br>Item |                       | 材 料<br>Material                            | 備 考<br>Note                           |
|-------------|-----------------------|--------------------------------------------|---------------------------------------|
| ①           | 封止樹脂<br>Resin         | エポキシ樹脂<br>Epoxy resin                      | 難燃グレード/Flammability rating<br>UL94V-0 |
| ②           | リードフレーム<br>Lead frame | 銅系<br>Copper alloy                         |                                       |
|             | 端子処理<br>Lead plating  | 鉛フリーはんだメッキ<br>Lead(Pb) free solder plating | Sn100%                                |
| ③           | ダイアタッチ<br>Die attach  | 高融点はんだ<br>High melting point solder        |                                       |
| ④           | シリコンチップ<br>Si         | Si                                         |                                       |

|                 |                       |
|-----------------|-----------------------|
| 捺印表示<br>Marking | レーザー<br>Laser marking |
|-----------------|-----------------------|