SMBZ5919B-SMBZ5945B

3 Watts Surface Mount Zener Doides

Features

- Low profile package
- Ideal for automated placement
- Low Zener impedance
- Low regulation factor
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC


Mechanical Data

- **Case:** DO-214AA (SMBJ)

  Molding compound meets UL 94 V-0 flammability rating

  Base P/N-E3 - RoHS compliant, commercial grade
- **Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

  E3 suffix meets JESD 201 class 1A whisker test
- **Polarity:** Color band denotes cathode end

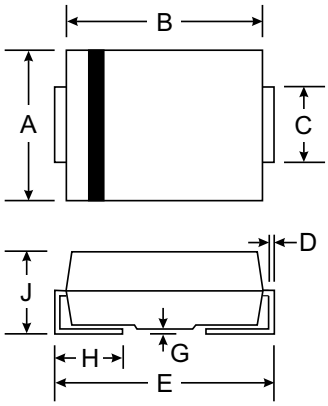

SMB		
Dim	**Min**	**Max**
A	3.30	3.94
B	4.06	4.70
C	1.91	2.21
D	0.15	0.31
E	5.00	5.59
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

Maximum Ratings @ T_A = 25°C unless otherwise specified


PARAMETER	SYMBOL	VALUE	UNIT
Maximum steady state power dissipation at T_L = 75 °C (Fig. 1)	P_D	3.0	W
Maximum steady state power dissipation at T_A = 25 °C (Fig. 1) (1)	P_D	550	mW
Maximum instantaneous forward voltage at 200 mA for all types (2)	V_F	1.5	V
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 150	°C

Notes:

(1) Mounted on minimum recommended pad layout

(2) Pulse test: 300 µs pulse width, 1 % duty cycle

ELECTRICAL CHARACTERISTICS	
SYMBOL	**PARAMETER**
V_Z	Reverse Zener voltage at I_{ZT}
I_{ZT}	Reverse current
Z_{ZT}	Maximum Zener impedance at I_{ZT}
I_{ZK}	Reverse current
Z_{ZK}	Maximum Zener impedance at I_{ZK}
I_R	Reverse leakage current at V_R
V_R	Reverse voltage
I_F	Forward current
V_F	Forward voltage at I_F
I_{ZM}	Maximum DC Zener current

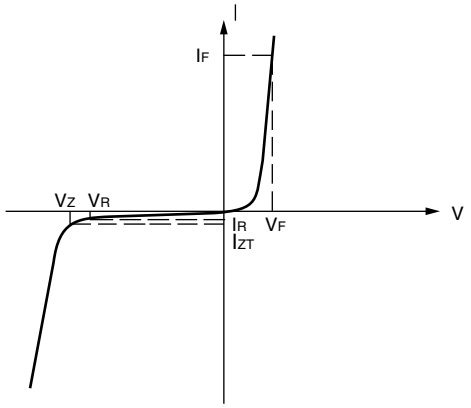

Zener Voltage Regulator

ELECTRICAL CHARACTERISTICS (T_A = 25 °C unless otherwise noted)											
PART NUMBER	**DEVICE MARKING CODE**	**ZENER VOLTAGE V_Z AT I_{ZT} (V)**			**TEST CURRENT I_{ZT} (mA)**	**MAXIMUM ZENER IMPEDANCE**			**MAXIMUM REVERSE LEAKAGE CURRENT I_R AT V_R**		**MAXIMUM ZENER CURRENT I_{ZM} (mA)**
						Z_{ZT} AT I_{ZT}	**Z_{ZK} AT I_{ZK}**				
		MIN.	**NOM.**	**MAX.**		**(Ω)**	**(Ω)**	**(mA)**	**(μA)**	**(V)**	
SMBZ5919B	19B	5.32	5.6	5.88	66.9	5	700	1	200	3	267
SMBZ5920B	20B	5.89	6.2	6.51	60.5	2	700	1	200	4	241
SMBZ5921B	21B	6.46	6.8	7.14	55.1	2.5	400	1	200	5.2	220
SMBZ5924B	24B	8.64	9.1	9.56	41.2	4.0	1000	0.5	25	7.0	164
SMBZ5925B	25B	9.5	10	10.5	37.5	4.5	1000	0.25	25	8.0	150
SMBZ5926B	26B	10.5	11	11.6	34.1	5.5	550	0.25	5	8.4	136
SMBZ5927B	27B	11.4	12	12.6	31.2	6.5	550	0.25	1	9.1	125
SMBZ5928B	28B	12.4	13	13.7	28.8	7.0	550	0.25	1	9.9	115
SMBZ5929B	29B	14.3	15	15.8	25.0	9.0	600	0.25	1	11.4	100
SMBZ5930B	30B	15.2	16	16.8	23.4	10.0	600	0.25	1	12.2	93
SMBZ5931B	31B	17.1	18	18.9	20.8	12.0	650	0.25	1	13.7	83
SMBZ5932B	32B	19.0	20	21.0	18.7	14.0	650	0.25	1	15.2	75
SMBZ5933B	33B	20.9	22	23.1	17.0	17.5	650	0.25	1	16.7	68
SMBZ5934B	34B	22.8	24	25.2	15.6	19.0	700	0.25	1	18.2	62
SMBZ5935B	35B	25.7	27	28.4	13.9	23.0	700	0.25	1	20.6	55
SMBZ5936B	36B	28.5	30	31.5	12.5	28.0	750	0.25	1	22.8	50
SMBZ5937B	37B	31.4	33	34.7	11.4	33.0	800	0.25	1	25.1	45
SMBZ5938B	38B	34.2	36	37.8	10.4	38.0	850	0.25	1	27.4	41
SMBZ5939B	39B	37.1	39	41.0	9.6	45.0	900	0.25	1	29.7	38
SMBZ5940B	40B	40.9	43	45.2	8.7	53.0	950	0.25	1	32.7	34
SMBZ5941B	41B	44.6	47	49.4	8.0	67	1000	0.25	1	35.8	31
SMBZ5942B	42B	48.4	51	53.6	7.3	70	1100	0.25	1	38.8	29
SMBZ5943B	43B	53.2	56	58.8	6.7	86	1300	0.25	1	42.6	26
SMBZ5944B	44B	58.9	62	65.1	6.0	100	1500	0.25	1	47.1	24
SMBZ5945B	45B	64.6	68	71.4	5.5	120	1700	0.25	1	51.7	22