

## SDLS095A – OCTOBER 1976 – REVISED MARCH 1988


- SN54283, SN54LS283 . . . J OR W PACKAGE  
SN54S283 . . . J PACKAGE  
SN74283 . . . N PACKAGE  
SN74LS283, SN74S283 . . . D OR N PACKAGE

|        | TWO<br>8-BIT<br>WORDS | TWO<br>16-BIT<br>WORDS | TYPICAL POWER<br>DISSIPATION<br>PER ADDER |
|--------|-----------------------|------------------------|-------------------------------------------|
| '283   | 23ns                  | 43ns                   | 310 mW                                    |
| 'LS283 | 25ns                  | 45ns                   | 95 mW                                     |
| 'S283  | 15ns                  | 30ns                   | 510 mW                                    |


The '283 and 'LS283 adders are electrically and functionally identical to the '83A and 'LS83A, respectively; only the arrangement of the terminals has been changed. The 'S283 high performance versions are also functionally identical.

The adder logic, including the carry, is implemented in its true form. End around carry can be accomplished without the need for logic or level inversion.

(TOP VIEW)



**(TOP VIEW)**

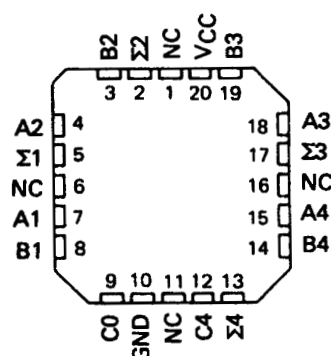

**NC - No internal connection**


| INPUT |    |    |    | OUTPUT         |    |    |                |    |    |
|-------|----|----|----|----------------|----|----|----------------|----|----|
|       |    |    |    | WHEN<br>C0 = L |    |    | WHEN<br>C0 = H |    |    |
|       |    |    |    | WHEN<br>C2 = L |    |    | WHEN<br>C2 = H |    |    |
| A1    | B1 | A2 | B2 | Σ1             | Σ2 | C2 | Σ1             | Σ2 | C2 |
| A3    | B3 | A4 | B4 | Σ3             | Σ4 | C4 | Σ3             | Σ4 | C4 |
| L     | L  | L  | L  | L              | L  | L  | H              | L  | L  |
| H     | L  | L  | L  | L              | H  | L  | L              | H  | L  |
| L     | H  | L  | L  | L              | H  | L  | L              | H  | L  |
| H     | H  | L  | L  | L              | H  | L  | H              | H  | L  |
| L     | L  | H  | L  | L              | L  | H  | H              | H  | L  |
| H     | L  | H  | L  | L              | H  | H  | L              | L  | H  |
| L     | H  | H  | L  | L              | H  | H  | L              | L  | H  |
| H     | H  | H  | L  | L              | L  | H  | H              | L  | H  |
| L     | L  | L  | H  | L              | H  | H  | L              | H  | L  |
| H     | L  | L  | H  | H              | H  | L  | L              | L  | H  |
| L     | H  | L  | H  | H              | H  | H  | L              | L  | H  |
| H     | H  | L  | H  | L              | L  | H  | L              | L  | H  |
| L     | L  | H  | H  | L              | L  | H  | H              | L  | H  |
| H     | L  | H  | H  | H              | L  | H  | L              | H  | H  |
| L     | H  | H  | H  | H              | L  | H  | H              | H  | H  |

**NOTE:** Input conditions at A1, B1, A2, B2, and C0 are used to determine outputs  $\Sigma 1$  and  $\Sigma 2$  and the value of the internal carry C2. The values at C2, A3, B3, A4, and B4 are then used to determine outputs  $\Sigma 3$ ,  $\Sigma 4$ , and C4.

# SN54283, SN54LS283, SN54S283, SN74283, SN74LS283, SN74S283 4-BIT BINARY FULL ADDERS WITH FAST CARRY

SDLS095A - OCTOBER 1976 - REVISED MARCH 1988


## logic symbol†

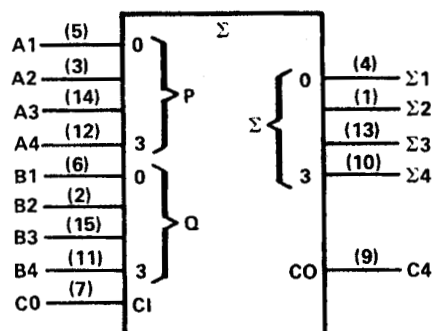

†This symbol is in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12.


Pin numbers shown are for D, J, N, and W packages.

## logic diagram (positive logic)

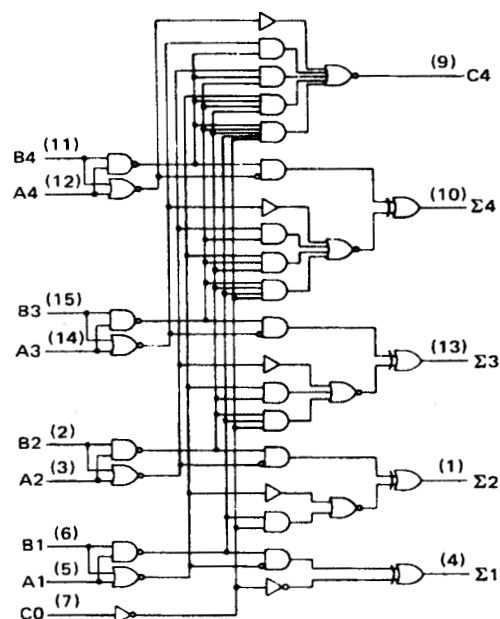


Pin numbers shown are for D, J, N, and W packages.


## schematics of inputs and outputs '283

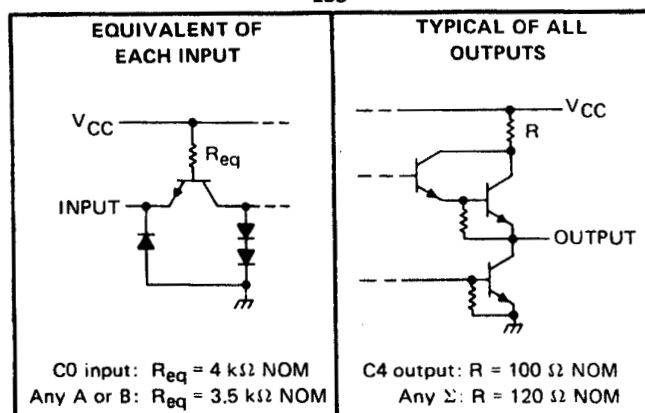

## 'LS283

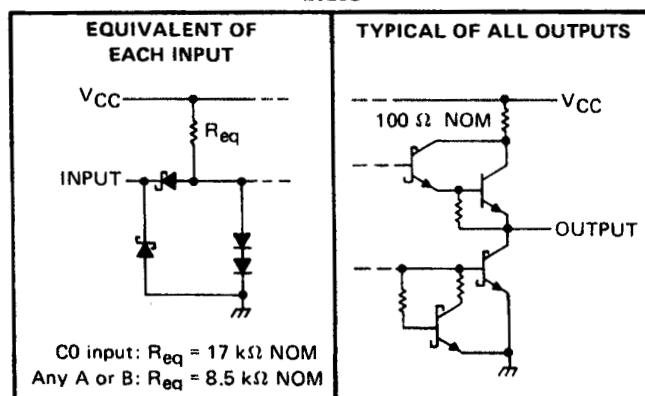

## 'S283

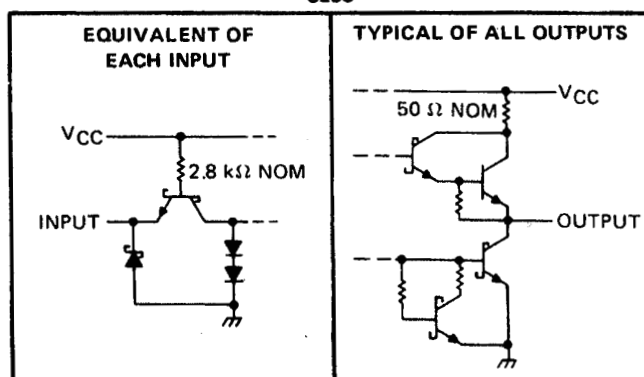

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

|                                                                    |                |
|--------------------------------------------------------------------|----------------|
| Supply voltage, $V_{CC}$ (see Note 1)                              | 7V             |
| Input voltage: '283, 'S283                                         | 5.5V           |
| 'LS283                                                             | 7V             |
| Interemitter voltage (see Note 2)                                  | 5.5V           |
| Operating free-air temperature range: SN54283, SN54LS283, SN54S283 | -55°C to 125°C |
| SN74283, SN74LS283, SN74S283                                       | 0°C to 70°C    |
| Storage temperature range                                          | -65°C to 150°C |

NOTES: 1. Voltage values, except interemitter voltage, are with respect to network ground terminal.

2. This is the voltage between two emitters of a multiple-emitter transistor. This rating applies for the '283 and 'S283 only between the following pairs: A1 and B1, A2 and B2, A3 and B3, A4 and B4.

# SN54283, SN74283

## 4-BIT BINARY FULL ADDERS WITH FAST CARRY

SDLS095A – OCTOBER 1976 – REVISED MARCH 1988

### recommended operating conditions

|                                                |                      |  | SN54283 |     |     | SN74283 |     |      | UNIT  |
|------------------------------------------------|----------------------|--|---------|-----|-----|---------|-----|------|-------|
|                                                |                      |  | MIN     | NOM | MAX | MIN     | NOM | MAX  |       |
| Supply Voltage, V <sub>CC</sub>                |                      |  | 4.5     | 5   | 5.5 | 4.75    | 5   | 5.25 | V     |
| High-level output current, I <sub>OH</sub>     | Any output except C4 |  | -800    |     |     | -800    |     |      | μA    |
|                                                | Output C4            |  | -400    |     |     | -400    |     |      |       |
| Low-level output current, I <sub>OL</sub>      | Any output except C4 |  | 16      |     |     | 16      |     |      | mA    |
|                                                | Output C4            |  | 8       |     |     | 8       |     |      |       |
| Operating free-air temperature, T <sub>A</sub> |                      |  | -55     |     |     | 0       |     |      | 70 °C |

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER |                                        | TEST CONDITIONS†                                                                                     |                                  | SN54283 |      |      | SN74283 |      |      | UNIT    |
|-----------|----------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------|---------|------|------|---------|------|------|---------|
|           |                                        |                                                                                                      |                                  | MIN     | TYP‡ | MAX  | MIN     | TYP‡ | MAX  |         |
| $V_{IH}$  | High-level input voltage               |                                                                                                      |                                  | 2       |      |      | 2       |      |      | V       |
| $V_{IL}$  | Low-level input voltage                |                                                                                                      |                                  |         |      | 0.8  |         |      | 0.8  | V       |
| $V_{IK}$  | Input clamp voltage                    | $V_{CC} = \text{MIN}$ , $I_I = -12 \text{ mA}$                                                       |                                  |         |      | -1.5 |         |      | -1.5 | V       |
| $V_{OH}$  | High-level output voltage              | $V_{CC} = \text{MIN}$ , $V_{IH} = 2 \text{ V}$ ,<br>$V_{IL} = 0.8 \text{ V}$ , $I_{OH} = \text{MAX}$ |                                  | 2.4     | 3.6  |      | 2.4     | 3.6  |      | V       |
| $V_{OL}$  | Low-level output voltage               | $V_{CC} = \text{MIN}$ , $V_{IH} = 2 \text{ V}$ ,<br>$V_{IL} = 0.8 \text{ V}$ , $I_{OL} = \text{MAX}$ |                                  |         | 0.2  | 0.4  |         | 0.2  | 0.4  | V       |
| $I_I$     | Input current at maximum input voltage | $V_{CC} = \text{MAX}$ , $V_I = 5.5 \text{ V}$                                                        |                                  |         |      | 1    |         |      | 1    | mA      |
| $I_{IH}$  | High-level input current               | $V_{CC} = \text{MAX}$ , $V_I = 2.4 \text{ V}$                                                        |                                  |         |      | 40   |         |      | 40   | $\mu$ A |
| $I_{IL}$  | Low-level input current                | $V_{CC} = \text{MAX}$ , $V_I = 0.4 \text{ V}$                                                        |                                  |         |      | -1.6 |         |      | -1.6 | mA      |
| $I_{OS}$  | Short-circuit output current §         | Any output except C4                                                                                 | $V_{CC} = \text{MAX}$            | -20     | -55  |      | -18     | -55  |      | mA      |
|           |                                        | Output C4                                                                                            |                                  | -20     | -70  |      | -18     | -70  |      | mA      |
| $I_{CC}$  | Supply current                         | $V_{CC} = \text{MAX}$ ,<br>Outputs open                                                              | All B low, other inputs at 4.5 V |         | 56   |      |         | 56   |      | mA      |
|           |                                        |                                                                                                      | All inputs at 4.5 V              |         | 66   | 99   |         | 66   | 110  |         |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

§ Only one output should be shorted at a time.

### switching characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

| PARAMETER <sup>6</sup> | FROM (INPUT)                     | TO (OUTPUT)    | TEST CONDITIONS                                               | MIN | TYP | MAX | UNIT |
|------------------------|----------------------------------|----------------|---------------------------------------------------------------|-----|-----|-----|------|
| t <sub>PLH</sub>       | C0                               | Any Σ          | C <sub>L</sub> = 15 pF, R <sub>L</sub> = 400 Ω,<br>See Note 3 |     | 14  | 21  | ns   |
| t <sub>PHL</sub>       |                                  |                |                                                               |     | 12  | 21  |      |
| t <sub>PLH</sub>       | A <sub>i</sub> or B <sub>i</sub> | Σ <sub>i</sub> |                                                               |     | 16  | 24  | ns   |
| t <sub>PHL</sub>       |                                  |                |                                                               |     | 16  | 24  |      |
| t <sub>PLH</sub>       | C0                               | C4             | C <sub>L</sub> = 15 pF, R <sub>L</sub> = 780 Ω,<br>See Note 3 |     | 9   | 14  | ns   |
| t <sub>PHL</sub>       |                                  |                |                                                               |     | 11  | 16  |      |
| t <sub>PLH</sub>       | A <sub>i</sub> or B <sub>i</sub> | C4             |                                                               |     | 9   | 14  | ns   |
| t <sub>PHL</sub>       |                                  |                |                                                               |     | 11  | 16  |      |

¶  $t_{PLH}$  = propagation delay time, low-to-high-level output

$t_{PHL}$  = propagation delay time, high-to-low-level output

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



# SN54LS283, SN74LS283

## 4-BIT BINARY FULL ADDERS WITH FAST CARRY

SDLS095A – OCTOBER 1976 – REVISED MARCH 1988

### recommended operating conditions

|                                       | SN54LS283 |     |      | SN74LS283 |     |      | UNIT         |
|---------------------------------------|-----------|-----|------|-----------|-----|------|--------------|
|                                       | MIN       | NOM | MAX  | MIN       | NOM | MAX  |              |
| Supply voltage, $V_{CC}$              | 4.5       | 5   | 5.5  | 4.75      | 5   | 5.25 | V            |
| High-level output current, $I_{OH}$   |           |     | -400 |           |     | -400 | $\mu$ A      |
| Low-level output current, $I_{OL}$    |           |     | 4    |           |     | 8    | mA           |
| Operating free-air temperature, $T_A$ | -55       |     | 125  | 0         |     | 70   | $^{\circ}$ C |

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER |                                        | TEST CONDITIONS†                                                                                    | SN54LS283 |      |      | SN74LS283 |      |      | UNIT    |
|-----------|----------------------------------------|-----------------------------------------------------------------------------------------------------|-----------|------|------|-----------|------|------|---------|
|           |                                        |                                                                                                     | MIN       | TYP‡ | MAX  | MIN       | TYP‡ | MAX  |         |
| $V_{IH}$  | High-level input voltage               |                                                                                                     | 2         |      |      | 2         |      |      | V       |
| $V_{IL}$  | Low-level input voltage                |                                                                                                     |           |      | 0.7  |           |      | 0.8  | V       |
| $V_{IK}$  | Input clamp voltage                    | $V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$                                                         |           |      | -1.5 |           |      | -1.5 | V       |
| $V_{OH}$  | High-level output voltage              | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = V_{IL \text{ max}}, I_{OH} = -400 \mu\text{A}$ | 2.5       | 3.4  |      | 2.7       | 3.4  |      | V       |
| $V_{OL}$  | Low-level output voltage               | $V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, I_{OL} = 4 \text{ mA}$                                  | 0.25      | 0.4  |      | 0.25      | 0.4  |      | V       |
|           |                                        | $V_{IL} = V_{IL \text{ max}}, I_{OL} = 8 \text{ mA}$                                                |           |      |      | 0.35      | 0.5  |      |         |
| $I_I$     | Input current at maximum input voltage | Any A or B                                                                                          |           | 0.2  |      |           | 0.2  |      | mA      |
|           |                                        | C0                                                                                                  |           | 0.1  |      |           | 0.1  |      |         |
| $I_{IH}$  | High-level input current               | Any A or B                                                                                          |           | 40   |      |           | 40   |      | $\mu$ A |
|           |                                        | C0                                                                                                  |           | 20   |      |           | 20   |      |         |
| $I_{IL}$  | Low-level input current                | Any A or B                                                                                          |           | -0.8 |      |           | -0.8 |      | mA      |
|           |                                        | C0                                                                                                  |           | -0.4 |      |           | -0.4 |      |         |
| $I_{OS}$  | Short-circuit output current§          | $V_{CC} = \text{MAX}$                                                                               | -20       |      | -100 | -20       |      | -100 | mA      |
| $I_{CC}$  | Supply current                         | All inputs grounded                                                                                 | 22        | 39   |      | 22        | 39   |      | mA      |
|           |                                        | All B low, other inputs at 4.5 V                                                                    | 19        | 34   |      | 19        | 34   |      |         |
|           |                                        | All inputs at 4.5 V                                                                                 | 19        | 34   |      | 19        | 34   |      |         |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at  $V_{CC} = 5 \text{ V}, T_A = 25^{\circ}\text{C}$ .

§ Only one output should be shorted at a time and duration of the short-circuit should not exceed one second.

### switching characteristics, $V_{CC} = 5 \text{ V}, T_A = 25^{\circ}\text{C}$

| PARAMETER¶ | FROM (INPUT) | TO (OUTPUT) | TEST CONDITIONS                         |  | MIN | TYP | MAX | UNIT |
|------------|--------------|-------------|-----------------------------------------|--|-----|-----|-----|------|
| tPLH       | C0           | Any Σ       | CL = 15 pF,<br>RL = 2 kΩ,<br>See Note 3 |  | 16  | 24  | ns  |      |
| tPHL       |              |             |                                         |  | 15  | 24  |     |      |
| tPLH       | Ai or Bi     | Σi          |                                         |  | 15  | 24  | ns  |      |
| tPHL       |              |             |                                         |  | 15  | 24  |     |      |
| tPLH       | C0           | C4          |                                         |  | 11  | 17  | ns  |      |
| tPHL       |              |             |                                         |  | 11  | 22  |     |      |
| tPLH       | Ai or Bi     | C4          |                                         |  | 11  | 17  | ns  |      |
| tPHL       |              |             |                                         |  | 12  | 17  |     |      |

¶  $t_{PLH}$  = propagation delay time, low-to-high-level output

$t_{PHL}$  = propagation delay time, high-to-low-level output

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

# SN54S283, SN74S283

## 4-BIT BINARY FULL ADDERS WITH FAST CARRY

SDLS095A – OCTOBER 1976 – REVISED MARCH 1988

### recommended operating conditions

|                                       |                      | SN54S283 |     |     | SN74S283 |     |      | UNIT         |
|---------------------------------------|----------------------|----------|-----|-----|----------|-----|------|--------------|
|                                       |                      | MIN      | NOM | MAX | MIN      | NOM | MAX  |              |
| Supply voltage, $V_{CC}$              |                      | 4.5      | 5   | 5.5 | 4.75     | 5   | 5.25 | V            |
| High-level output current, $I_{OH}$   | Any output except C4 | -1       |     |     | -1       |     |      | mA           |
|                                       | Output C4            | -500     |     |     | -500     |     |      | $\mu$ A      |
| Low-level output current, $I_{OL}$    | Any output except C4 | 20       |     |     | 20       |     |      | mA           |
|                                       | Output C4            | 10       |     |     | 10       |     |      |              |
| Operating free-air temperature, $T_A$ |                      | -55      |     |     | 0        |     |      | $^{\circ}$ C |

### electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER |                                        | TEST CONDITIONS†                                                                                     |                                                  | MIN | TYP‡ | MAX  | UNIT    |
|-----------|----------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------|-----|------|------|---------|
| $V_{IH}$  | High-level input voltage               |                                                                                                      |                                                  | 2   |      |      | V       |
| $V_{IL}$  | Low-level input voltage                |                                                                                                      |                                                  |     |      | 0.8  | V       |
| $V_{IK}$  | Input clamp voltage                    | $V_{CC} = \text{MIN}$ , $I_I = -18 \text{ mA}$                                                       |                                                  |     |      | -1.2 | V       |
| $V_{OH}$  | High-level output voltage              | SN54S283                                                                                             | $V_{CC} = \text{MIN}$ , $V_{IH} = 2 \text{ V}$ , | 2.5 | 3.4  |      | V       |
|           |                                        | SN74S283                                                                                             | $V_{IL} = 0.8 \text{ V}$ , $I_{OH} = \text{MAX}$ | 2.7 | 3.4  |      |         |
| $V_{OL}$  | Low-level output voltage               | $V_{CC} = \text{MIN}$ , $V_{IH} = 2 \text{ V}$ ,<br>$V_{IL} = 0.8 \text{ V}$ , $I_{OL} = \text{MAX}$ |                                                  |     |      | 0.5  | V       |
| $I_I$     | Input current at maximum input voltage | $V_{CC} = \text{MAX}$ , $V_I = 5.5 \text{ V}$                                                        |                                                  |     |      | 1    | mA      |
| $I_{IH}$  | High-level input current               | $V_{CC} = \text{MAX}$ , $V_I = 2.7 \text{ V}$                                                        |                                                  |     |      | 50   | $\mu$ A |
| $I_{IL}$  | Low-level input current                | $V_{CC} = \text{MAX}$ , $V_I = 0.5 \text{ V}$                                                        |                                                  |     |      | -2   | mA      |
| $I_{OS}$  | Short-circuit output current§          | Any output except C4                                                                                 | $V_{CC} = \text{MAX}$                            | -40 |      | -100 | mA      |
|           |                                        | Output C4                                                                                            |                                                  | -20 |      | -100 |         |
| $I_{CC}$  | Supply current                         | $V_{CC} = \text{MAX}$ ,<br>Outputs open                                                              | All B low, other inputs at 4.5 V                 |     | 80   |      | mA      |
|           |                                        |                                                                                                      | All inputs at 4.5 V                              |     | 95   | 160  |         |

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable device type.

‡ All typical values are at  $V_{CC} = 5 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

§ Only one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

### switching characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

| PARAMETER† | FROM (INPUT)   | TO (OUTPUT)  | TEST CONDITIONS                                        | MIN | TYP  | MAX | UNIT |
|------------|----------------|--------------|--------------------------------------------------------|-----|------|-----|------|
| $t_{PLH}$  | C0             | Any $\Sigma$ | $C_L = 15 \text{ pF}, R_L = 280 \Omega,$<br>See Note 3 |     | 11   | 18  | ns   |
| $t_{PHL}$  |                |              |                                                        |     | 12   | 18  |      |
| $t_{PLH}$  | $A_i$ or $B_i$ | $\Sigma_i$   |                                                        |     | 12   | 18  | ns   |
| $t_{PHL}$  |                |              |                                                        |     | 11.5 | 18  |      |
| $t_{PLH}$  | C0             | C4           | $C_L = 15 \text{ pF}, R_L = 560 \Omega,$<br>See Note 3 |     | 6    | 11  | ns   |
| $t_{PHL}$  |                |              |                                                        |     | 7.5  | 11  |      |
| $t_{PLH}$  | $A_i$ or $B_i$ | C4           |                                                        |     | 7.5  | 12  | ns   |
| $t_{PHL}$  |                |              |                                                        |     | 8.5  | 12  |      |

†  $t_{PLH}$  = propagation delay time, low-to-high-level output

$t_{PHL}$  = propagation delay time, high-to-low-level output

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)            | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|-------------------------|----------------------|--------------|------------------------------------|-------------------------|
| 5962-7604301VEA  | ACTIVE        | CDIP         | J                  | 16   | 25             | TBD                        | Call TI                 | N / A for Pkg Type   | -55 to 125   | 5962-7604301VE<br>A<br>SNV54LS283J | <a href="#">Samples</a> |
| 76043012A        | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE              | N / A for Pkg Type   | -55 to 125   | 76043012A<br>SNJ54LS<br>283FK      | <a href="#">Samples</a> |
| 7604301EA        | ACTIVE        | CDIP         | J                  | 16   | 1              | TBD                        | Call TI                 | N / A for Pkg Type   | -55 to 125   | 7604301EA<br>SNJ54LS283J           | <a href="#">Samples</a> |
| 7604301FA        | ACTIVE        | CFP          | W                  | 16   | 1              | TBD                        | Call TI                 | N / A for Pkg Type   | -55 to 125   | 7604301FA<br>SNJ54LS283W           | <a href="#">Samples</a> |
| JM38510/31202BEA | ACTIVE        | CDIP         | J                  | 16   | 1              | TBD                        | Call TI                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>31202BEA               | <a href="#">Samples</a> |
| JM38510/31202BFA | ACTIVE        | CFP          | W                  | 16   | 1              | TBD                        | Call TI                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>31202BFA               | <a href="#">Samples</a> |
| M38510/31202BEA  | ACTIVE        | CDIP         | J                  | 16   | 1              | TBD                        | Call TI                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>31202BEA               | <a href="#">Samples</a> |
| M38510/31202BFA  | ACTIVE        | CFP          | W                  | 16   | 1              | TBD                        | Call TI                 | N / A for Pkg Type   | -55 to 125   | JM38510/<br>31202BFA               | <a href="#">Samples</a> |
| SN54LS283J       | ACTIVE        | CDIP         | J                  | 16   | 1              | TBD                        | Call TI                 | N / A for Pkg Type   | -55 to 125   | SN54LS283J                         | <a href="#">Samples</a> |
| SN54S283J        | ACTIVE        | CDIP         | J                  | 16   | 1              | TBD                        | Call TI                 | N / A for Pkg Type   | -55 to 125   | SN54S283J                          | <a href="#">Samples</a> |
| SN74LS283D       | ACTIVE        | SOIC         | D                  | 16   | 40             | Green (RoHS<br>& no Sb/Br) | NIPDAU                  | Level-1-260C-UNLIM   | 0 to 70      | LS283                              | <a href="#">Samples</a> |
| SN74LS283N       | ACTIVE        | PDIP         | N                  | 16   | 25             | Green (RoHS<br>& no Sb/Br) | NIPDAU                  | N / A for Pkg Type   | 0 to 70      | SN74LS283N                         | <a href="#">Samples</a> |
| SN74LS283NE4     | ACTIVE        | PDIP         | N                  | 16   | 25             | Green (RoHS<br>& no Sb/Br) | NIPDAU                  | N / A for Pkg Type   | 0 to 70      | SN74LS283N                         | <a href="#">Samples</a> |
| SN74LS283NSR     | ACTIVE        | SO           | NS                 | 16   | 2000           | Green (RoHS<br>& no Sb/Br) | NIPDAU                  | Level-1-260C-UNLIM   | 0 to 70      | 74LS283                            | <a href="#">Samples</a> |
| SN74S283N        | ACTIVE        | PDIP         | N                  | 16   | 25             | Green (RoHS<br>& no Sb/Br) | NIPDAU                  | N / A for Pkg Type   | 0 to 70      | SN74S283N                          | <a href="#">Samples</a> |
| SNJ54LS283FK     | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE              | N / A for Pkg Type   | -55 to 125   | 76043012A<br>SNJ54LS<br>283FK      | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead/Ball Finish<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5)  | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|-------------------------|----------------------|--------------|--------------------------|-------------------------|
| SNJ54LS283J      | ACTIVE        | CDIP         | J                  | 16   | 1              | TBD             | Call TI                 | N / A for Pkg Type   | -55 to 125   | 7604301EA<br>SNJ54LS283J | <a href="#">Samples</a> |
| SNJ54LS283W      | ACTIVE        | CFP          | W                  | 16   | 1              | TBD             | Call TI                 | N / A for Pkg Type   | -55 to 125   | 7604301FA<br>SNJ54LS283W | <a href="#">Samples</a> |
| SNJ54S283J       | ACTIVE        | CDIP         | J                  | 16   | 1              | TBD             | Call TI                 | N / A for Pkg Type   | -55 to 125   | SNJ54S283J               | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBsolete:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF SN54LS283, SN54LS283-SP, SN54S283, SN74LS283, SN74S283 :**

- Catalog: [SN74LS283](#), [SN54LS283](#), [SN74S283](#)
- Military: [SN54LS283](#), [SN54S283](#)
- Space: [SN54LS283-SP](#)

**NOTE: Qualified Version Definitions:**

- Catalog - TI's standard catalog product
- Military - QML certified for Military and Defense Applications
- Space - Radiation tolerant, ceramic packaging and qualified for use in Space-based application

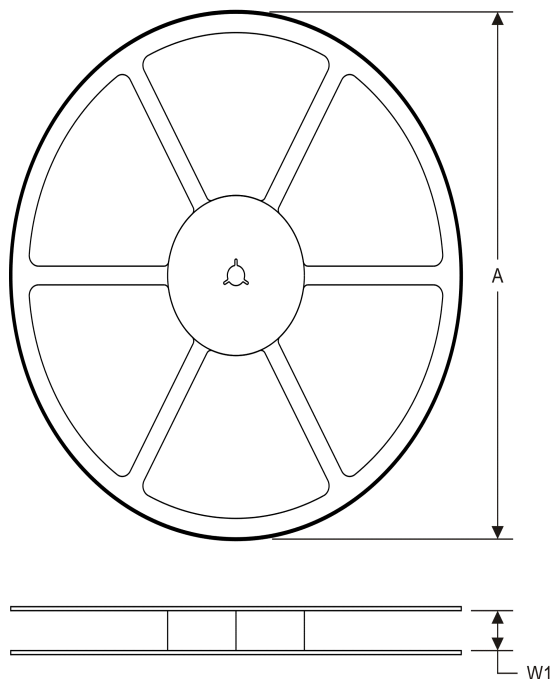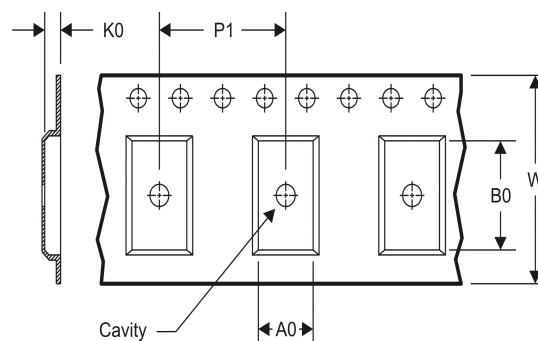**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


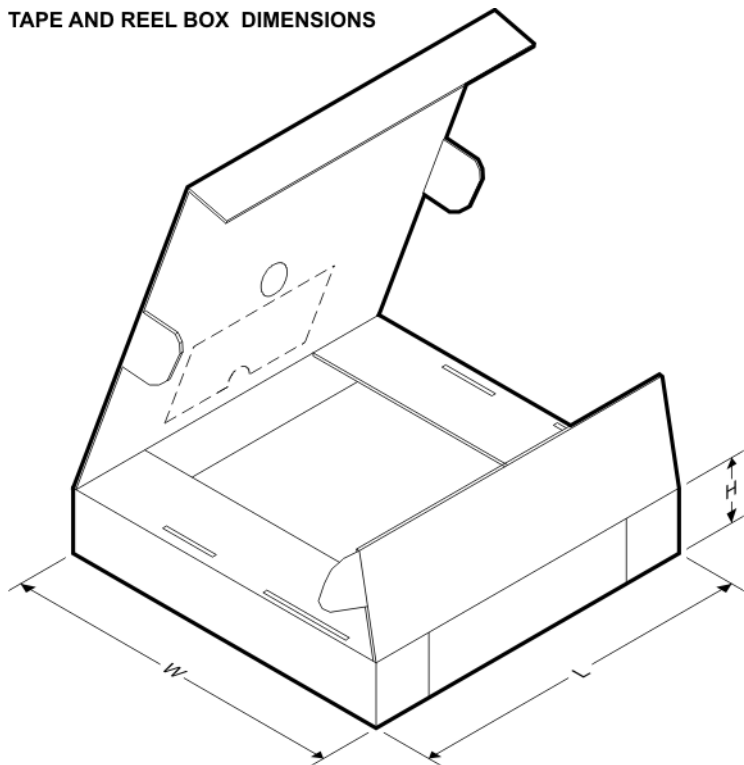
|    |                                                           |
|----|-----------------------------------------------------------|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| SN74LS283NSR | SO           | NS              | 16   | 2000 | 330.0              | 16.4               | 8.2     | 10.5    | 2.5     | 12.0    | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| SN74LS283NSR | SO           | NS              | 16   | 2000 | 367.0       | 367.0      | 38.0        |

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale ([www.ti.com/legal/termsofsale.html](http://www.ti.com/legal/termsofsale.html)) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2020, Texas Instruments Incorporated