


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/28/11	

APPROVED: _____

DATE: _____ TITLE: _____

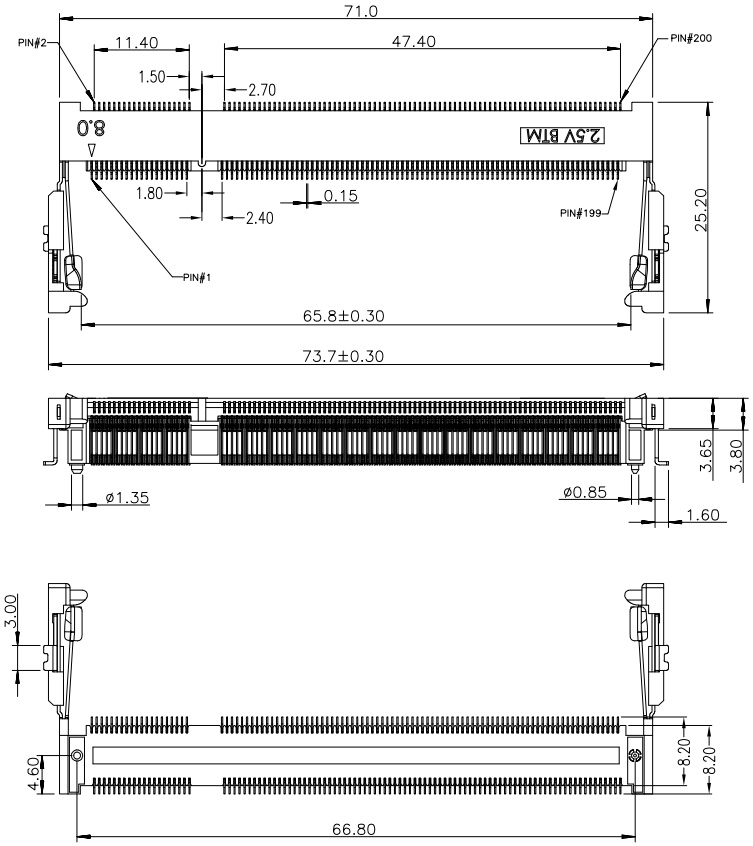



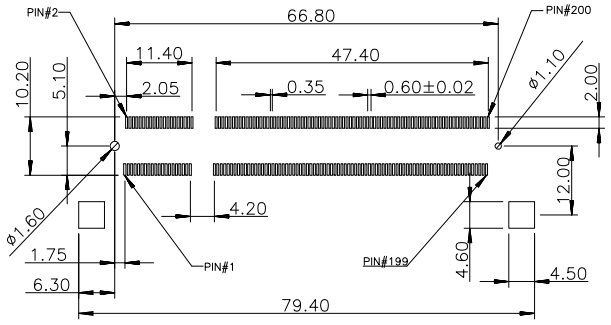

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE)

SPECIFICATIONS:

Material:

Body: Hi-temp thermoplastic, rated UL 94V-0

Contacts: Bronze, Gold plated.

Electrical:

Operating voltage: 30 VAC max

Current rating: 1 Amps max

Contact resistance: 30 mohms Max.

Insulation resistance: 1000 mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED

DIMENSIONS	ANGLES
.X ± .38	± 3°
.XX ± .25	
.XXX ± .20	

APPROVALS		DATE
DRAWN	DY	4/28/11
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
SO DIMM SOCKET, 200 PIN, SMT
2.5V DDR RAM, 8MM HEIGHT, REVERSED TYPE

SIZE	PART NO.	REV.
X	SOD-200-S-3-8.0-R	-

REF: S00138T | SCALE: NTS | SHEET 1 OF 2