
For DECT RF Filters (F-11 Package)

SP454


Electrical Characteristic:

Characteristic	Sym	Unit	Spec
Nominal Center Frequency	F_0	MHz	454.3
Stop Band Attenuation (from peak level) 1) at DC~(F_0-30.7)MHz 2) at F_0+30.7MHz~F_0+200MHz		dB	 50min 50min
Insertion Loss(at F_0±2.0MHz)	IL	dB	4.5max
Passband variation (at F_0±2.0 MHz)		dB	2max
Input/Output Impedance (Nominal)			50Ω

Input/Output Impedance(fig1):

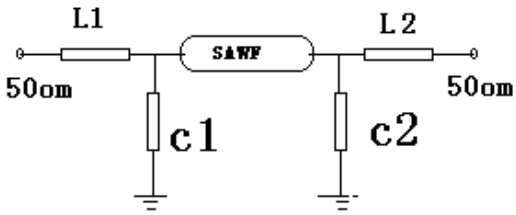


F-11 Package(fig2):

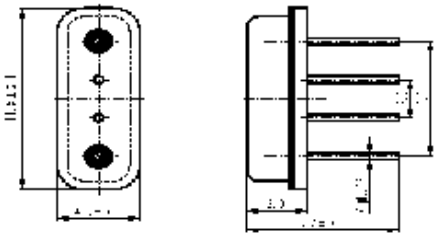

L1、L2=18nH;C1、C2=1pF

This may be changed according to PCB

Frequency Characteristic(fig3):

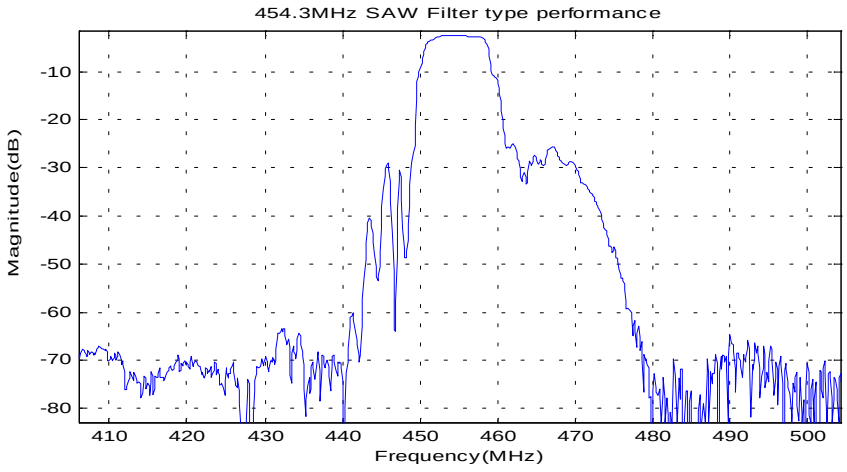

P.O.Box 2513 Chongqing China 400060 Tel:86-23-62920684 Fax:62805284 email:sawmkt@sipat.com