<

SP9908 Series 39 Watts Switching Power Supply

FEATURES




- ●Hub Standard 3”x6” Size.
- ●90-264Vac Universal Input
- ●CISPR’B’ Compliance
- ●100% Burn-In Test
- ●Over Voltage Protection Installation
- ●Short-Circuit Protection Installation
- ●Protection Type: Auto-Recovery

SPECIFICATION

Item \ Model	SP9908
Input Voltage	AC 90~264V
Input Frequency	47~63Hz
Efficiency	68% Typical
Operating Temperature	0~40℃
Storage Temperature	-20~85℃
Weight	230g/8.1oz
Safety Description	UL, CUL, TUV

(∗): Under Development (I/P): In Process

MECHANICAL

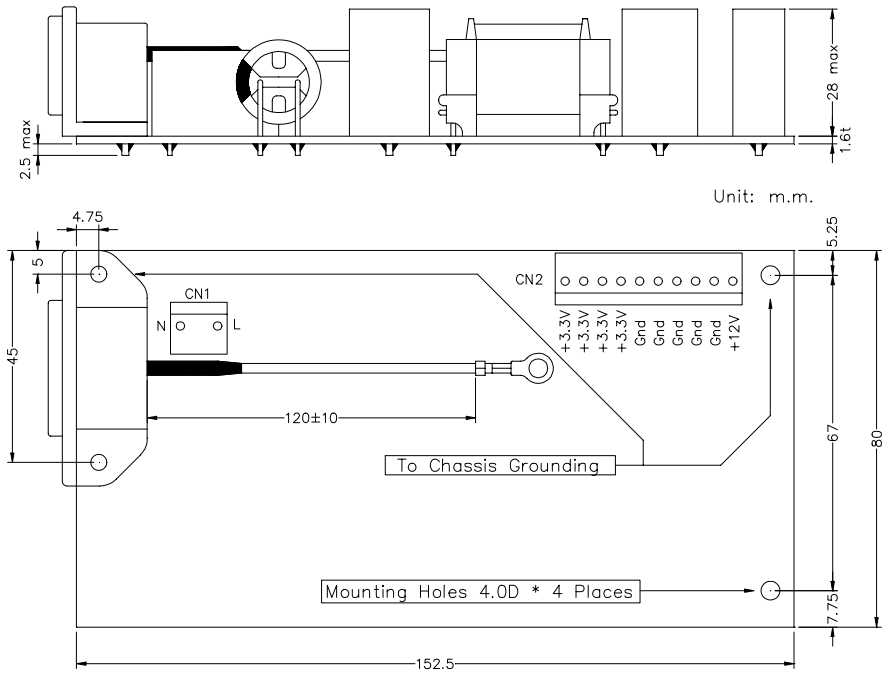

OUTPUTS

Model No.		SP9908	
Vo		Vo1	Vo2
		+3.3V	+12V
Load	Min	3A	0A
	Rated	10A	0.5A
	Surge	---	---
Regulation	Line	1%	1%
	Load	3%	10%
Tolerance		+/-5%	+/-10%
Ripple Noise		50mV	180mV

Ref. No.	Connector Type	Mating Connector Type
INLET	IEC-320 Socket	IEC-320 AC Power Cord
CN1	TKP P-8800I or Equivalent	TKP H8800 or Equivalent
CN2	TKP P-8800I or Equivalent	TKP H8800 or Equivalent

Bothhand USA. e-mail: sales@bothhandusa.com http://www.bothhand.com

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434