
SIPMOS® Power Transistor


Features

- N channel
- Enhancement mode
- Avalanche rated
- d*v*/d*t* rated
- 175°C operating temperature

Product Summary

Drain source voltage	V_{DS}	30	V
Drain-Source on-state resistance	$R_{DS(on)}$	0.015	Ω
Continuous drain current	I_D	46	A





Type	Package	Ordering Code	Packaging
SPP46N03	P-TO220-3-1	Q67040-S4742-A2	Tube
SPB46N03	P-TO263-3-2	Q67040-S4145-A3	Tape and Reel

Pin 1	Pin 2	Pin 3
G	D	S

Maximum Ratings, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current T_C = 25 °C, 1) T_C = 100 °C	I_D	 46 46	A
Pulsed drain current T_C = 25 °C	I_{Dpulse}	184	
Avalanche energy, single pulse I_D = 46 A, V_{DD} = 25 V, R_{GS} = 25 Ω	E_{AS}	250	mJ
Avalanche energy, periodic limited by T_{jmax}	E_{AR}	12	
Reverse diode d*v*/d*t* I_S = 46 A, V_{DS} = 24 V, d*i*/d*t* = 200 A/µs, T_{jmax} = 175 °C	d*v*/d*t*	6	kV/µs
Gate source voltage	V_{GS}	±20	V
Power dissipation T_C = 25 °C	P_{tot}	120	W
Operating and storage temperature	T_j, T_{stg}	-55... +175	°C
IEC climatic category; DIN IEC 68-1		55/175/56	

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-		1.25	K/W
Thermal resistance, junction - ambient, leded	R_{thJA}	-	-	62	
SMD version, device on PCB:	R_{thJA}				
@ min. footprint		-	-	62	
@ 6 cm^2 cooling area[2)]		-	-	40	

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain- source breakdown voltage V_{GS} = 0 V, I_D = 0.25 mA	$V_{(BR)DSS}$	30	-	-	V
Gate threshold voltage, V_{GS} = V_{DS} I_D = 80 µA	$V_{GS(th)}$	2.1	3	4	
Zero gate voltage drain current	I_{DSS}				µA
V_{DS} = 30 V, V_{GS} = 0 V, T_j = 25 °C			0.1	1	
V_{DS} = 30 V, V_{GS} = 0 V, T_j = 150 °C		-	-	100	
Gate-source leakage current V_{GS} = 20 V, V_{DS} = 0 V	I_{GSS}	-	10	100	nA
Drain-Source on-state resistance	$R_{DS(on)}$				Ω
V_{GS} = 10 V, I_D = 46 A		-	0.009	0.015	

[1]current limited by bond wire

[2] Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6 cm2 (one layer, 70µm thick) copper area for drain connection. PCB is vertical without blown air.

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Transconductance $V_{DS}\geq 2*I_D*R_{DS(on)max}$, I_D = 46 A	g_{fs}	20	39	-	S
Input capacitance V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz	C_{iss}	-	1400	1750	pF
Output capacitance V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz	C_{oss}	-	645	810	
Reverse transfer capacitance V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz	C_{rss}	-	260	325	
Turn-on delay time V_{DD} = 15 V, V_{GS} = 10 V, I_D = 46 A, R_G = 6.8 Ω	$t_{d(on)}$	-	13	20	ns
Rise time V_{DD} = 15 V, V_{GS} = 10 V, I_D = 46 A, R_G = 6.8 Ω	t_r	-	24	36	
Turn-off delay time V_{DD} = 15 V, V_{GS} = 10 V, I_D = 46 A, R_G = 6.8 Ω	$t_{d(off)}$	-	27	42	
Fall time V_{DD} = 15 V, V_{GS} = 10 V, I_D = 46 A, R_G = 6.8 Ω	t_f	-	24	36	

Electrical Characteristics, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Gate to source charge V_{DD} = 24 V, I_D = 46 A	Q_{gs}	-	7	11	nC
Gate to drain charge V_{DD} = 24 V, I_D = 46 A	Q_{gd}	-	19	28.5	
Gate charge total V_{DD} = 24 V, I_D = 46 A, V_{GS} = 0 to 10 V	Q_g	-	39	60	
Gate plateau voltage V_{DD} = 24 V, I_D = 46 A	$V_{(plateau)}$	-	5.5	-	V
Reverse Diode					
Inverse diode continuous forward current T_C = 25 °C	I_S	-	-	46	A
Inverse diode direct current,pulsed T_C = 25 °C	I_{SM}	-	-	184	
Inverse diode forward voltage V_{GS} = 0 V, I_F = 92 A	V_{SD}	-	1.06	1.7	V
Reverse recovery time V_R = 15 V, I_F=I_S , di_F/dt = 100 A/µs	t_{rr}	-	40	60	ns
Reverse recovery charge V_R = 15 V, I_F=I_S , di_F/dt = 100 A/µs	Q_{rr}	-	0.04	0.06	µC

Power Dissipation


$P_{tot} = f(T_C)$

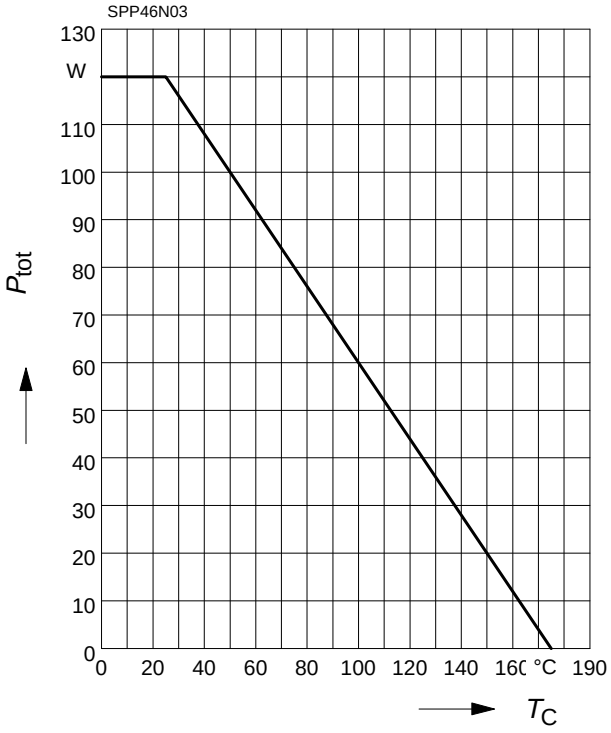

Drain current

$I_D = f(T_C)$


parameter: $V_{GS} \geq 10$ V

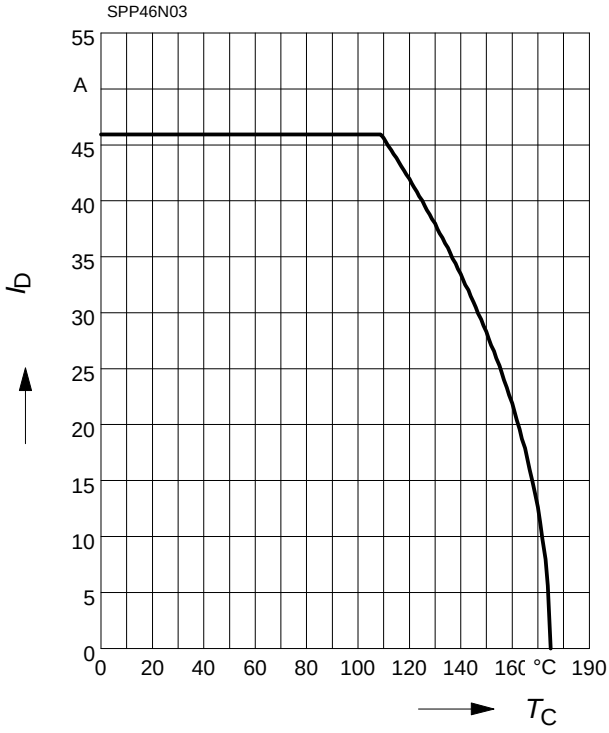

Safe operating area

$I_D = f(V_{DS})$


parameter : $D = 0$, $T_C = 25$ °C

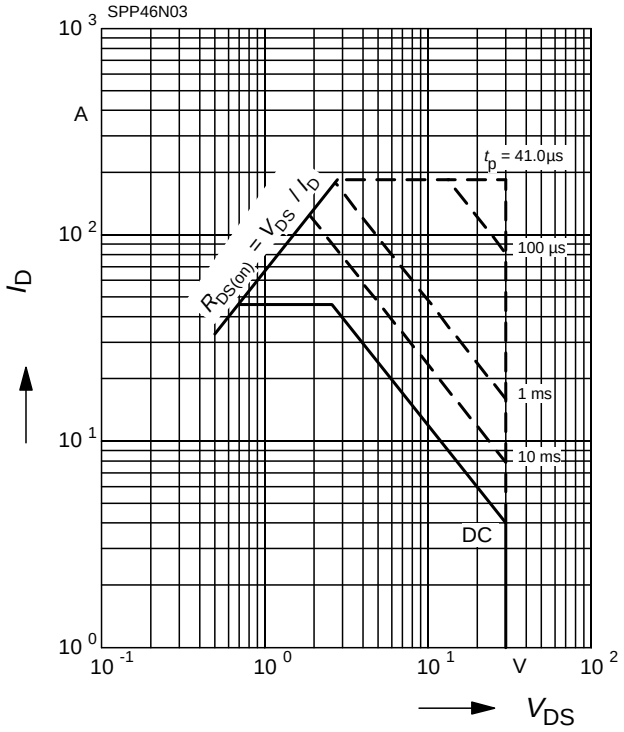

Transient thermal impedance

$Z_{thJC} = f(t_p)$


parameter : $D = t_p/T$

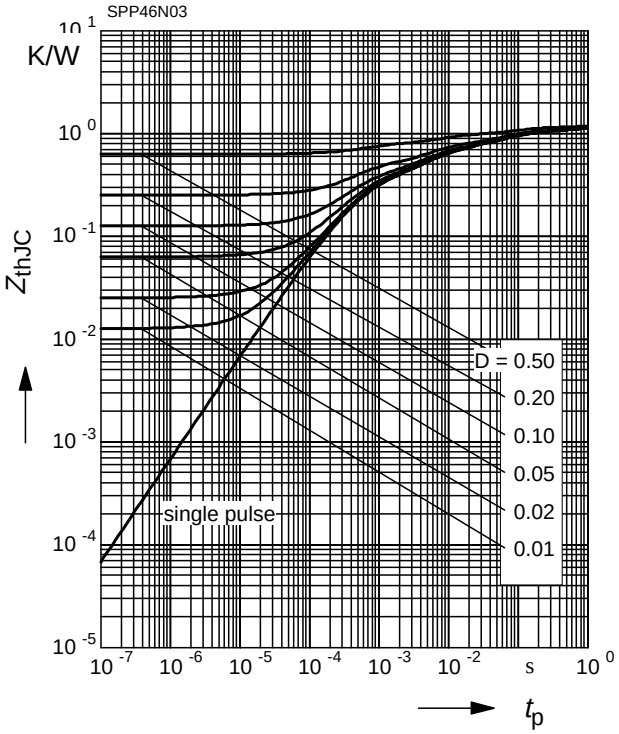

Typ. output characteristics

$I_D = f(V_{DS})$


parameter: t_p = 80 µs

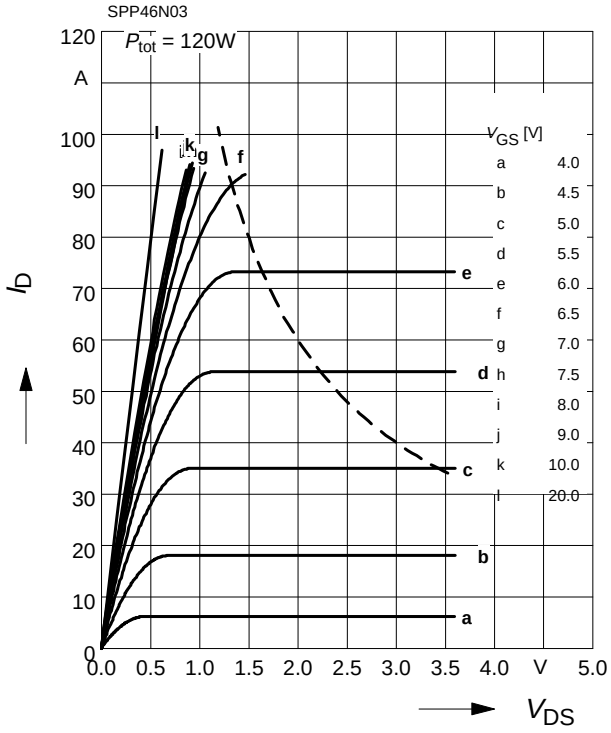

Typ. drain-source-on-resistance

$R_{DS(on)} = f(I_D)$


parameter: V_{GS}

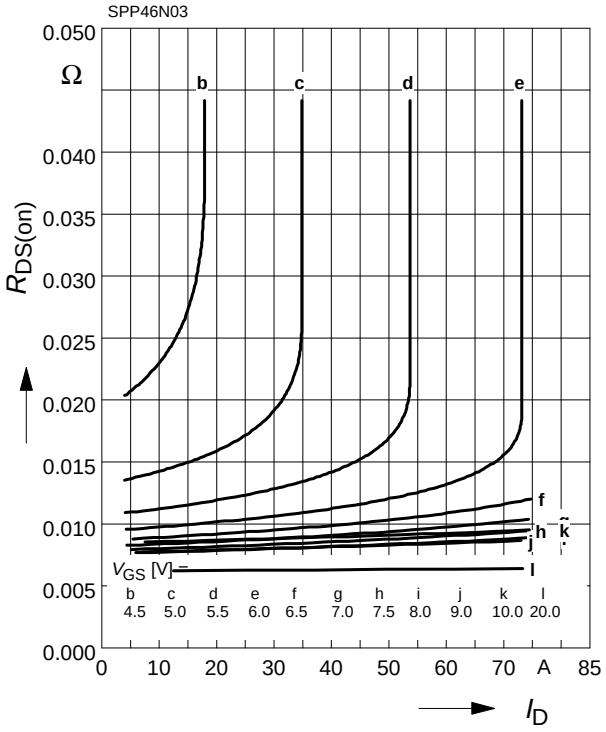

Typ. transfer characteristics $I_D = f(V_{GS})$

parameter: t_p = 80 µs


$V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$

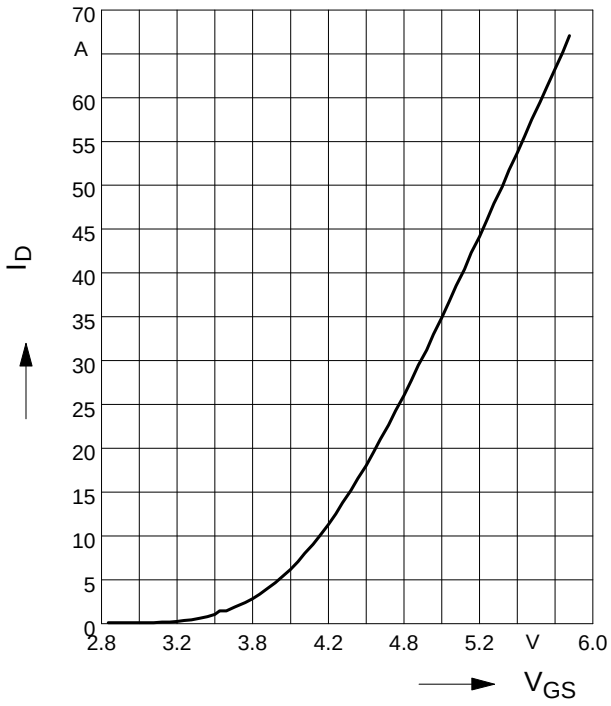

Typ. forward transconductance

$g_{fs} = f(I_D)$; T_j = 25°C


parameter: g_{fs}

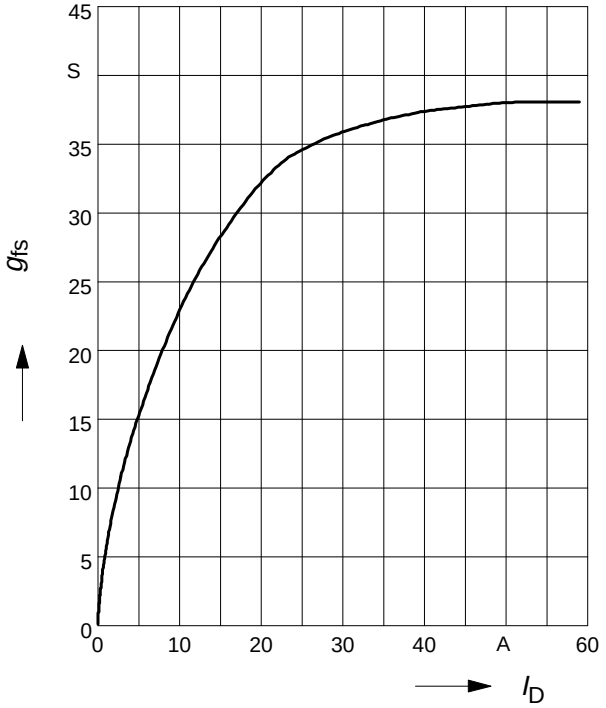

Drain-source on-resistance

$R_{DS(on)} = f(T_j)$


parameter : I_D = 46 A, V_{GS} = 10 V

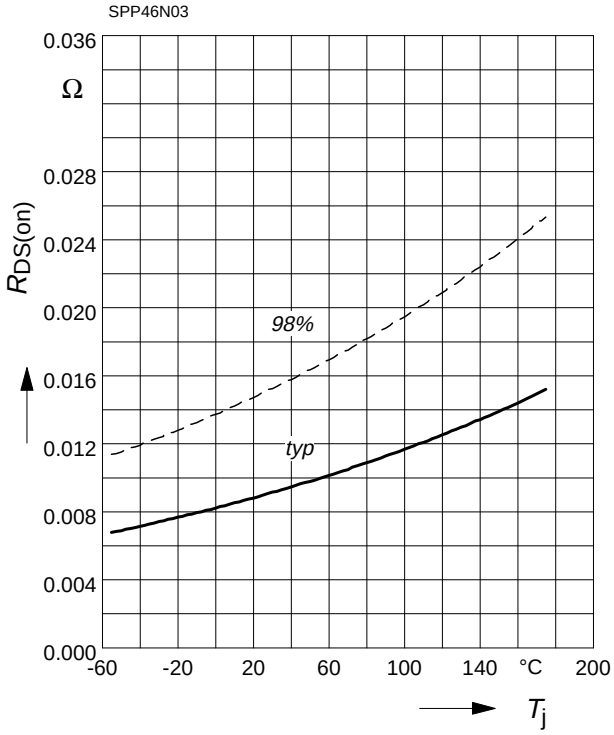

Gate threshold voltage

$V_{GS(th)} = f(T_j)$


parameter : $V_{GS} = V_{DS}$, I_D = 80 µA

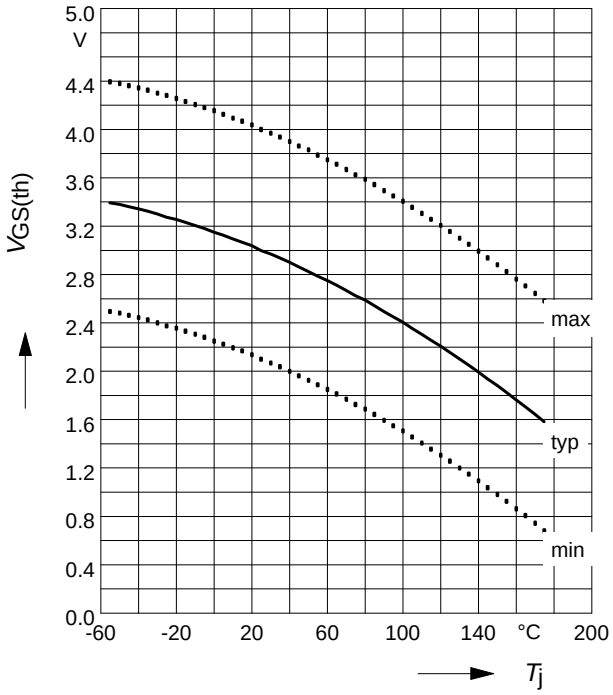

Typ. capacitances

C = $f(V_{DS})$


parameter: V_{GS} = 0 V, f = 1 MHz

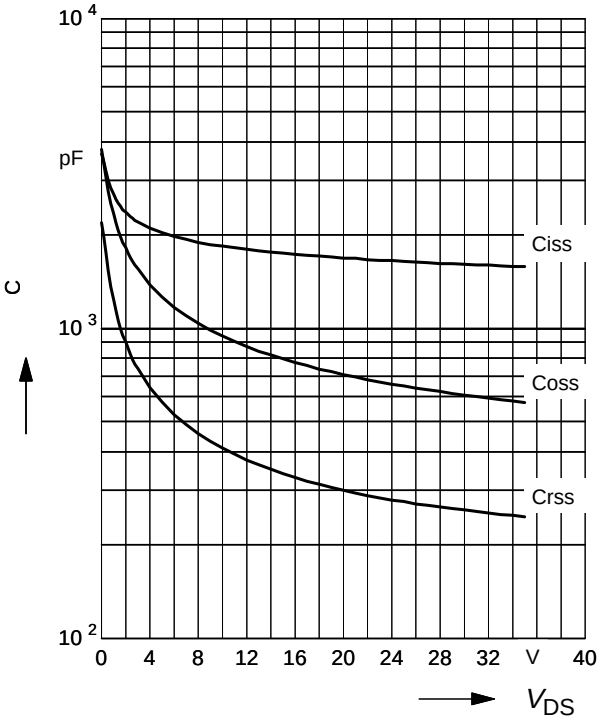

Forward characteristics of reverse diode

$I_F = f(V_{SD})$


parameter: T_j , t_p = 80 µs

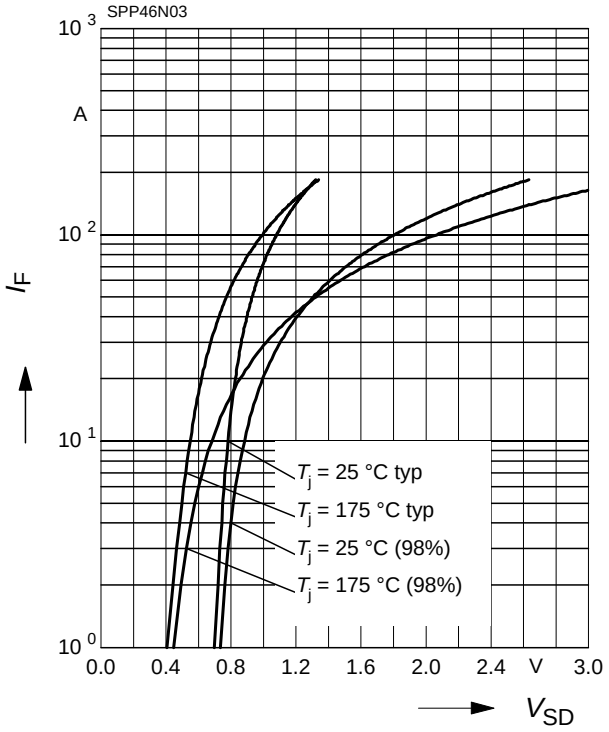

Avalanche Energy $E_{AS} = f(T_j)$

parameter: I_D = 46 A, V_{DD} = 25 V


R_{GS} = 25 Ω

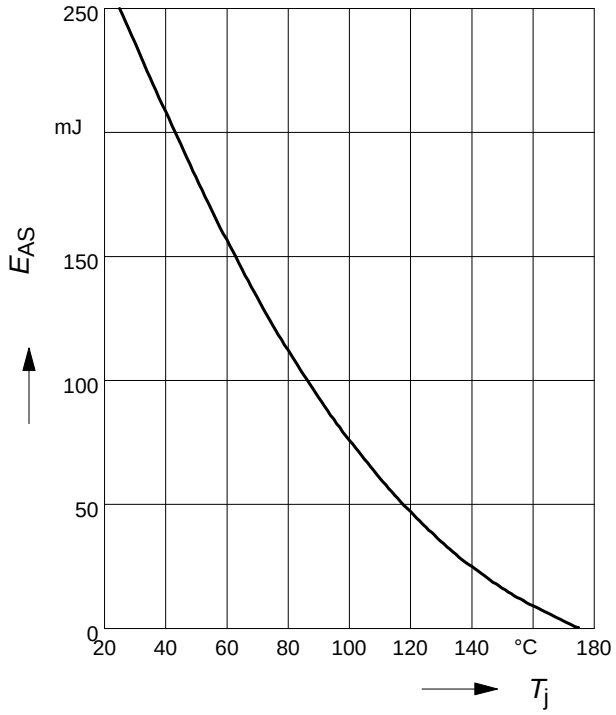

Typ. gate charge


$V_{GS} = f(Q_{Gate})$

parameter: $I_{D\ puls}$ = 46 A

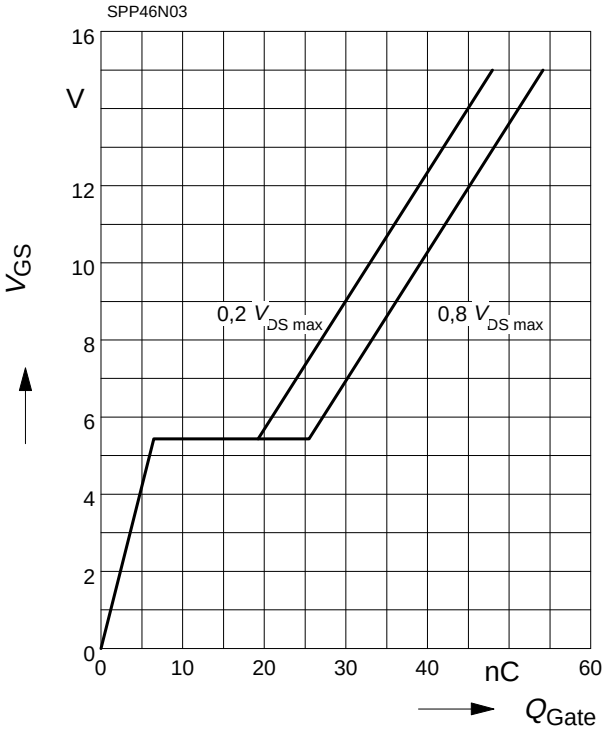

Drain-source breakdown voltage

$V_{(BR)DSS} = f(T_j)$

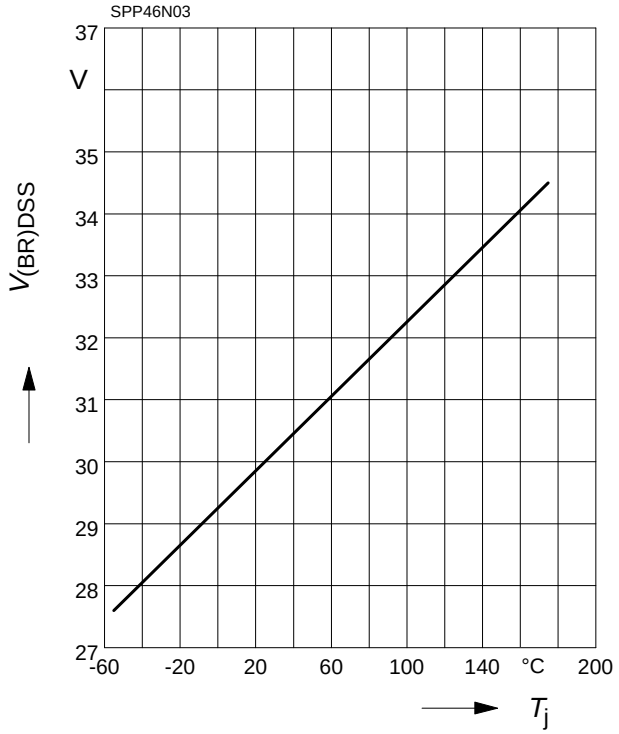

Edition 02 / 1999
Published by Siemens AG,
Bereich Halbleiter Vetrieb,
Werbung, Balanstraße 73,
81541 München
© Siemens AG 1997
All Rights Reserved.

Attention please!

As far as patents or other rights of third parties are concerned, liability is only assumed for components, not for applications, processes and circuits implemented within components or assemblies.
The information describes a type of component and shall not be considered as warranted characteristics.
Terms of delivery and rights to change design reserved.
For questions on technology, delivery and prices please contact the Semiconductor Group Offices in Germany or the Siemens Companies and Representatives worldwide (see address list).
Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Siemens Office, Semiconductor Group.
Siemens AG is an approved CECC manufacturer.

Packing

Please use the recycling operators known to you. We can also help you - get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose!

Critical components[1] of the Semiconductor Group of Siemens AG, may only be used in life-support devices or systems[2] with the express written approval of the Semiconductor Group of Siemens AG.

1)A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

2)Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain and/or protecf human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.