

Specification


All exposed cast aluminum components are made of non corrosive pure aluminum copper free (Aluminum is less than .1% copper content. #356 alloy.)

Finish: All polyester powder baked coatings preceded with a 5 baths preparation process. Meets military grade MIL-C781706 with a 2000 hours salt spray test.

- Pulse rated porcelain socket or 75W/600V thermoplastic compact fluorescent socket.
- One-piece molded silicone gasket with memory retention.
- High power factor CWA ballast. Or 98% P.F. electronic smart ballast with end of life detection for compact fluorescent.
- All stainless steel hardware.
- All Moving and removable parts are sealed with a memory retention silicone gasket.

- 1- Cast aluminum ballast housing, with built-in hinge mechanism.
- 2- Cast aluminum stainless steel spring loaded latch. Release latch may be locked for restricted access
- 3- Hard aluminum triple shade assembly for brightness control.
- 4- Thermal shock and heat resistant borosilicate frosted heavy glass diffuser, with a prismatic linear inner glass structure.
- 5- One piece cast aluminum star ribbed cage

Photometry



Separate updated technical specification sheets with related models and light sources with I.E.S formatted photometry are available on www.luminis.com.

Please refer to pages 101 /102 & 103 for additional details.

Options

- Mounting**
- ☐ **SPB:** 3ft. black power cord (3/18-300v with suspension cable.
 - ☐ **SPW:** 3ft. white power cord (3/18-300v with suspension cable.
 - ☐ **STM60:** 60" lg.suspension stem.
 - ☐ **STM80:** 80" lg.suspension stem.
 - ☐ **STC:** Safety cable.
 - ☐ **SW45:** 45° hang straight swivel.
 - ☐ **TCB:** 3ft. extended black spiral power cord.

Accessories



- ☐ **PC5:** High impact diffuser. Max.50W

Electrical

- ☐ **EM42S:** 1 lamp (26/32/42W)
- ☐ **FS:** Fuse
- ☐ **PH1:** 120/277V photo cell.
- ☐ **PH2:** 347V photo cell.
- ☐ **QS:** Standby lamp socket.
- ☐ **QRS:** H.I.D. lamp restrike

Note: **EM** optional battery test switch and pilot lamp are installed remotely. (See page 72)

PH1 & PH2 are installed with luminaire when specified with C.F.L. sources. For H.I.D sources PH1 or PH2 are installed with pole only. (see options APA/APS/ACA3/APC)

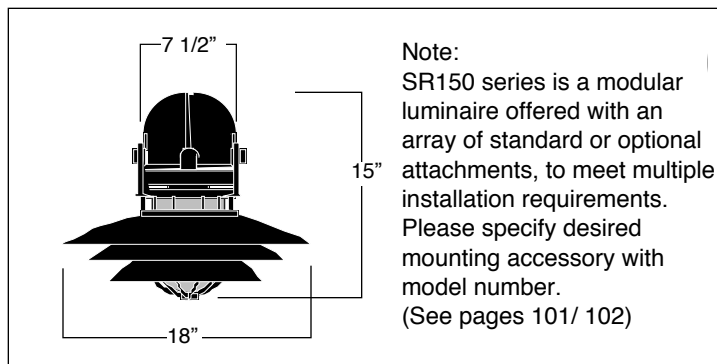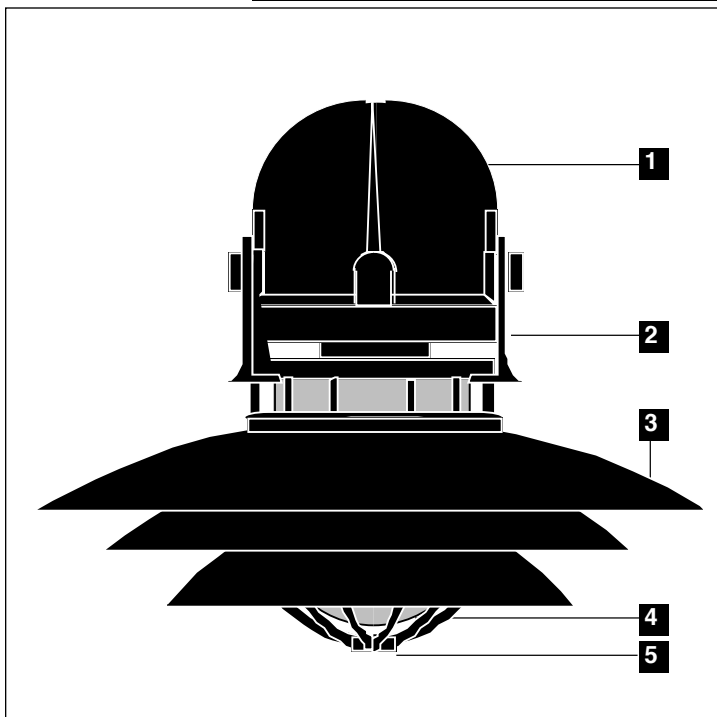

Certification

E.T.L Wet location

Weight & EPA

E.P.A: 1.15 sq./ft Max. weight: 16 lbs.

Model#	Mounting	Light source selection		Voltage	Finish
☐ SR150	☐ ACA3			120 V Standard factory prewired (If no voltage is specified) For other voltages, please specify with catalog number.	(Refer to color chart)
	☐ ACW33	MH (ED17)	CF (Gx24q)		<u>Standard selection</u>
	☐ APA	☐ M50	Single lamp	☐ F132	☐ WHT: Snow white
	☐ APC	☐ M70	☐ F142	☐ F142	☐ BKT: Jet black
☐ APS	☐ M100	☐ F157	☐ F157	☐ BZT: Bronze	
☐ S	☐ M150			☐ GRT: Titanium gray	
☐ T	☐ M175	HPS (ED17)	CF (Gx24q)	☐ DGT: Gun metal	
☐ W		☐ H50	Two lamp	☐ CHT: Champagne	
		☐ H70	☐ F226	☐ MST: Matte silver	
		☐ H100	☐ F232	☐ GNT: Forest green	
		☐ H150	☐ F242	<u>Optional colors</u>	
				☐ CS: Custom color	
				☐ RAL: RAL# color	
				Compact fluorescent smart ballast 120/277	
				☐ 347 V (To specify)	


(Lamps by others)

Luminaries may be altered for improvements or discontinued without prior notice.


LUMINIS [USA] - 3555 NW 53rd Court, Fort Lauderdale, FL.33309
LUMINIS [Canada] - 87 C Brunswick D.D.O. Q.C. Canada H9B 2J5

Tel: 954 .717 .4155 Fax: 954 . 717.4157
 Toll free: 888 .401 .6999

Web: www.luminis.com
 Sept. 2006 Rev. Feb.2007

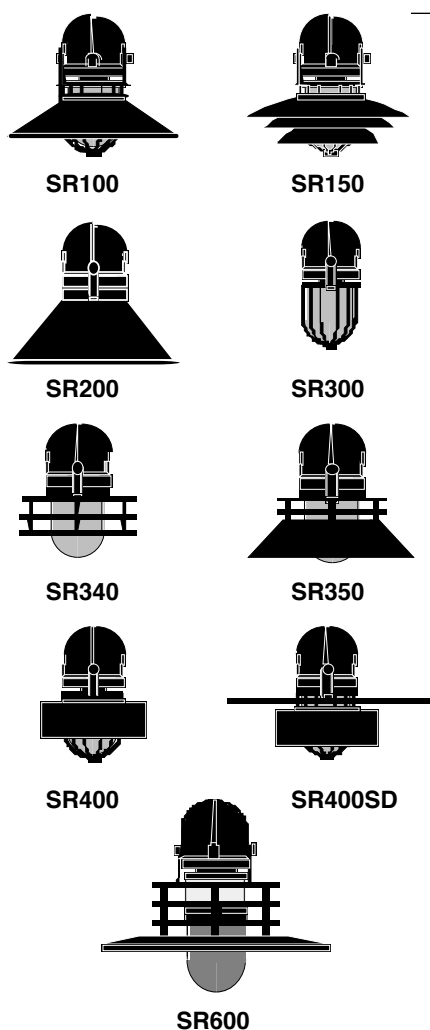


* Note:
36" extension with ACA3 attachment
24" extension with APC & APA attachment

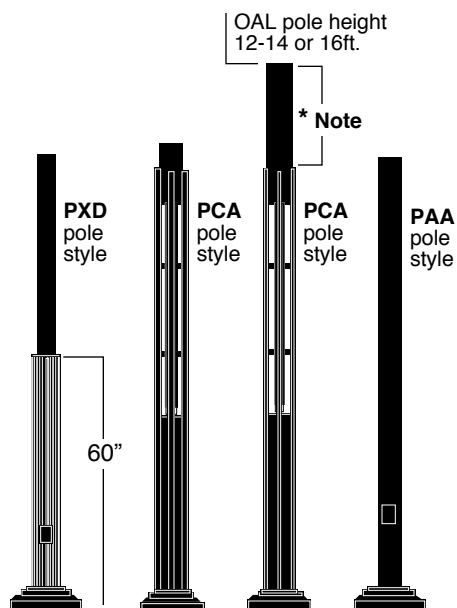


Note: A mounting accessory is required to complete an installation assembly.


Pole mount




APC
Side pole mount.



ACA3
Side pole mount.



APA
Side pole mount.




APS
Post top


Wall mount




T
Wall mount.



ACW3
Wall mount.




W
Wall mount.
Except SR600 series



WA
Wall mount
SR600 series.

Wall or ceiling attachment accessories

Ceiling mount



S
Ceiling stem mount.

Compatible poles listing.

Post side mount with APA attachment accessory

Mounting style	4"O.D.	5"O.D.	4"O.D.	4"O.D.	Pole height
APA	PAA410-APA	PAA510-APA		PXD10-APA	10 ft
	PAA412-APA	PAA512-APA	PCA12-APA	PXD12-APA	12 ft
	PAA414-APA	PAA514-APA	PCA14-APA	PXD14-APA	14 ft
	PAA416-APA	PAA516-APA	PCA16-APA	PXD16-APA	16 ft
	PAA418-APA	PAA518-APA		PXD18-APA	18 ft
	PAA420-APA	PAA520-APA		PXD20-APA	20 ft

Post side mount with APC attachment accessory

PAA410-APC	PAA510-APC		PXD10-APC	10 ft
PAA412-APC	PAA512-APC	PCA12-APC	PXD12-APC	12 ft
PAA414-APC	PAA514-APC	PCA14-APC	PXD14-APC	14 ft
PAA416-APC	PAA516-APC	PCA16-APC	PXD16-APC	16 ft
PAA418-APC	PAA518-APC		PXD18-APC	18 ft
PAA420-APC	PAA520-APC		PXD20-APC	20 ft

Post side mount with APS attachment accessory


PAA410-A	PAA510-A1	PCA10-A	PXD10-A	10 ft
PAA412-A	PAA512-A1	PCA12-A	PXD12-A	12 ft
PAA414-A	PAA514-A1	PCA14-A	PXD14-A	14 ft
PAA416-A	PAA516-A1	PCA16-A	PXD16-A	16 ft
PAA418-A	PAA518-A1		PXD18-A	18 ft
PAA420-A	PAA520-A1		PXD20-A	20 ft

Post side mount with ACA3 attachment accessory


PAA414-ACA	PAA514-ACA	PCA14-ACA	PXD14-ACA	14 ft
PAA416-ACA	PAA516-ACA	PCA16-ACA	PXD16-ACA	16 ft
PAA418-ACA	PAA518-ACA		PXD18-ACA	18 ft
PAA420-ACA	PAA520-ACA		PXD20-ACA	20 ft

For poles details and specification, please refer to pages 140 to 144

Luminaires may be altered for design improvements or discontinued without prior notice.

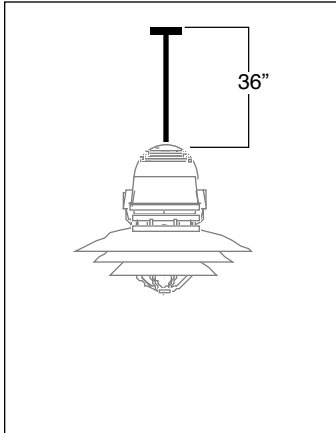


-S
15° swivel ceiling mount with 1/2" dia. X 36"lg aluminum stem. luminaire top adaptor allowing to cut stem to length on site. (Mounts over a standard 4" octagonal box with 3 1/2" C/C holes)

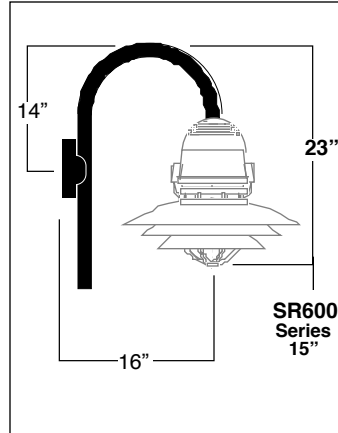


W -1 5/8" Dia. shepherd aluminum arm wall mount, with a cast aluminum wall cover and galvanized steel mounting plate.


WA- For SR600 series with double wall cast mounting plate

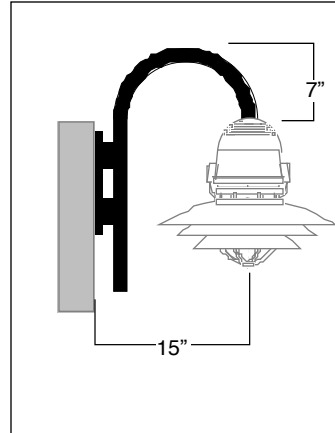


APA -1 5/8" Dia. shepherd aluminum side pole mount. (EPA: 0.15)

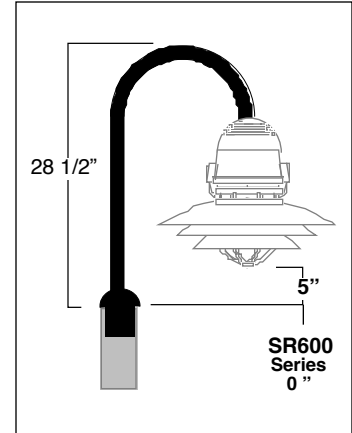


APS -1 5/8" Dia. shepherd aluminum post top mount, with a cast aluminum tenon to fit with a 3 3/4" I.D. pole. (EPA: 0.15)

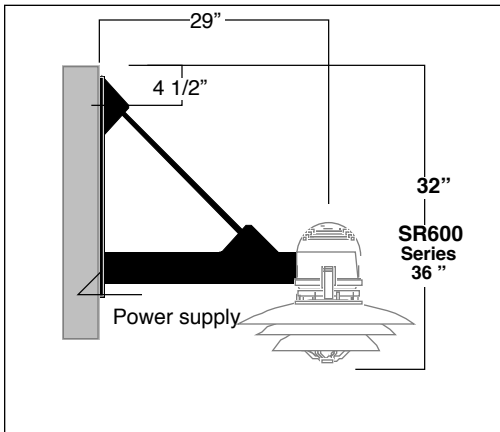


ACA3 -1" x 3" extruded aluminum Davit arm pole mounting adaptor designed to fit with 4 to 5" dia. poles. 1/2" dia. X 45° standard natural stainless steel rod support. (EPA: 0.7)

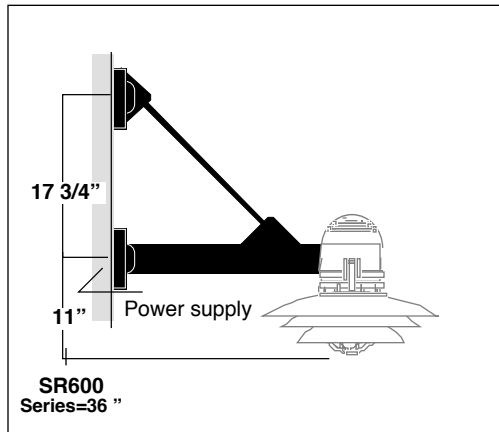

ACW3 -1" x 3" extruded aluminum Davit arm wall mounting adaptor with cast aluminum covers and galvanized steel mounting plates. 1/2" dia. X 45° standard natural stainless steel rod support.

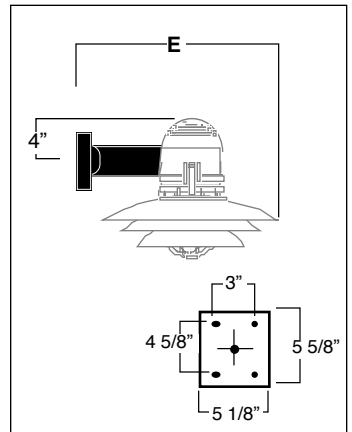

T -1" x 3" extruded aluminum wall mounting straight adaptor with cast aluminum cover and galvanized steel mounting plate.

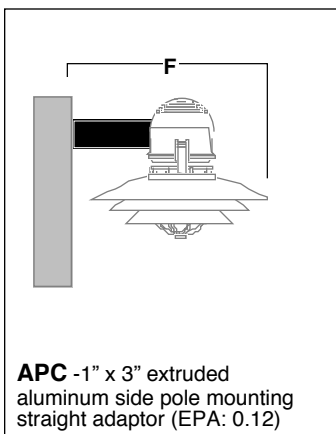

APC -1" x 3" extruded aluminum side pole mounting straight adaptor (EPA: 0.12)

Option "T"

Option "APC"

	E	F
SR100		
SR150	22 1/2"	21 1/2"
SR200		
SR350		
SR300	17"	16"
SR400SD	24 1/2"	23 1/2"
SR410SD		
SR400	18 1/2"	18 1/2"
SR410		
SR600	25"	24"

Above listed dimensions may vary upon minor design changes. For critical conditions, please consult factory.

Luminaires may be altered for improvements or discontinued without prior notice.


LUMINIS [USA] - 3555 NW 53rd Court, Fort Lauderdale, FL.33309
LUMINIS [Canada] - 87 C Brunswick D.D.O. Q.C. Canada H9B 2J5

Tel: 954 .717 .4155 Fax: 954 . 717.4157
 Toll free: 888 .401 .6999

Web: www.luminis.com
 June.2007

Please specify selected option as a suffix to the specified model number. Some options may not be compatible when used in the same luminaire. This information is indicated when it is applicable.

Slope ceiling adaptor



Option: **SW45**
45° hang straight ball swivel
for 5/8" dia. suspension stem.

Longer suspension stem



Option
STM60 36" lg. X 5/8" O.D.
suspension stem.
STM80 60" lg. X 5/8" O.D.
suspension stem.
80" lg. X 5/8" O.D.
suspension stem.

Stems can be cut on site
and rethreaded externally
(Tap size 1/4-18)

For other factory cut to size length add
suffix **-STM** with desired length to
catalog# max. 120"

Suspension power cord



Note: cable size
and type may
change at factory
discretion upon
availability, to
accommodate
required wiring
with selected
option.

Option: **SPW** (White)
SPB (Black)
3/18 X 36"lg. power cord with
adjustable aircraft cable.
SPB Black power cable only
with options
EM42 / EM42S
QS / DS / DS2

Spiral power cord



Option: **TCW** (White)
TCB (Black)
3/18 Spiral power cord Max.
277V Standard extended
length: 3ft.
Not applicable when
using options
EM42 / EM42S
QS / DS / DS2

Aluminum hood

Option: **FH**



One piece solid aluminum
reflector hood. All painted same
color as luminaire.
Replaces slotted standard hood.

Safety suspension cable



Option: **STC**
Safety aircraft
suspension cable, for
applications with
earthquake regulations.
Cables extends 18"
beyond canopy.
(Secured to building
structure)

Pier mount adaptor


Option: **PM**



Pier mount or short wall
perimeter mounting
adaptor plate.
Fits with SR500 series



Impact resistant diffuser



Option: **PC5**
High impact white
translucent U.V.
stabilized acrylic diffuser.
Max. 50W H.I.D.
or 2x32w C.F.L.

Quartz lamp restrike



Option: **QRS**
Quartz restrike
standby lamp kit
max. 100W DC
bayonet type

Light photo sensor



Option:
PH1 -120V
PH2 - 277 / 347V

PH1 & PH2 Photo electric sensors, are installed with
luminaire when specified with C.F.L. sources.
For H.I.D sources PH1 or PH2 are installed with pole only.
(see options APA/APS/ACA3/APC)

Emergency battery pack

For 57w & 70w: Consult factory

EM42 For **SR700**
series only
One lamp:
26w: 450 Lmns..
32w: 575 Lmns..
42w: 750 Lmns.

**Please refer to page 16 for
more details**

Quartz lamp restrike



Option: **QS**
Quartz lamp socket for external 120V
emergency power input.
Separate 120V dedicated wiring is included.
max. 100 W DC bayonet type.
(Lamp is not included.)
Not Applicable with CFL lamps.

Fuse



Option
FS
Ballast protection fuse
Available with H.I.D.
luminaires only

Note: FS option fuse is factory
calibrated and installed with
selected wattage.

Post mount luminaires:
FS installed with pole.

All other types:
FS is installed with luminaire.

Emergency battery back-up

EM42 / EM42S


One lamp:

26w: 450 Lmns.. Time: 90 Mnts -
32w: 575 Lmns. 120/277V / T 0° C
42w: 750 Lmns.

Note: Use of Emergency battery, requires periodic
and regular testing to ensure correct operation.
(please refer to manufacturer's instructions.)

For 57w & 70w:
(Remote installation only) Consult factory

EM Ballast wiring
diagram for 120V
factory connection.

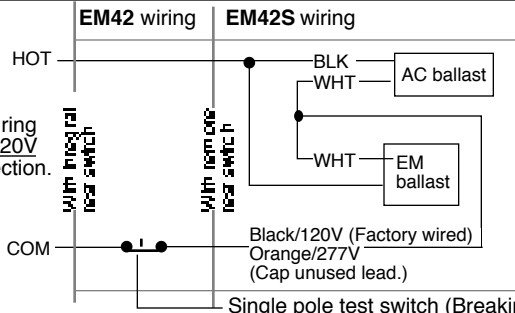

Note:
EM42 option is supplied
with integral test switch and
pilot light.

EM42S is supplied with
additional wiring for
external remotely installed
test switch and pilot light.

Please refer to luminaire
specification sheet option
listing.

Luminaires may be altered for improvements or discontinued without prior notice.