

SR320 THRU SR3200

SCHOTTKY BARRIER RECTIFIER



REVERSE VOLTAGE: 20 to 200 VOLTS

FORWARD CURRENT: 3.0 AMPERE

FEATURES

- High current capability
- High surge current capability
- Low forward voltage drop
- Exceeds environmental standards of MIL-S-19500/228
- For use in low voltage, high frequency inverters free wheeling, and porlarity protection applications

MECHANICAL DATA

Case: Molded plastic, DO-201AD

Epoxy: UL 94V-O rate flame retardant


Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed

Polarity: Color band denotes cathode end

Mounting position: Any

Weight: 0.04ounce, 1.1gram

DO-201AD

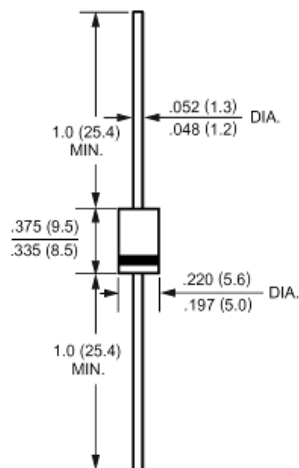

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SR320	SR330	SR340	SR350	SR360	SR380	SR3100	SR3150	SR3200	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length	I _(AV)	3.0									Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	80									Amp
Maximum Forward Voltage at 3.0A DC and 25℃	V _F	0.55			0.7		0.85		0.95		Volts
Maximum Reverse Current at T _A =25℃ at Rated DC Blocking Voltage T _A =100℃	I _R	2.0 30									mAmp
Typical Junction Capacitance (Note 1)	C _J	200									pF
Typical Thermal Resistance (Note 2)	R _{θJA}	40									℃/W
Operating Junction Temperature Range	T _J	-55 to +125			-55 to +150						℃
Storage Temperature Range	T _{stg}	-55 to +150									℃

NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance From Junction to Ambient 0.375"(9.5mm) lead length P.C.B. Mounted

SR320 THRU SR3200
SCHOTTKY BARRIER RECTIFIER



RATINGS AND CHARACTERISTIC CURVES

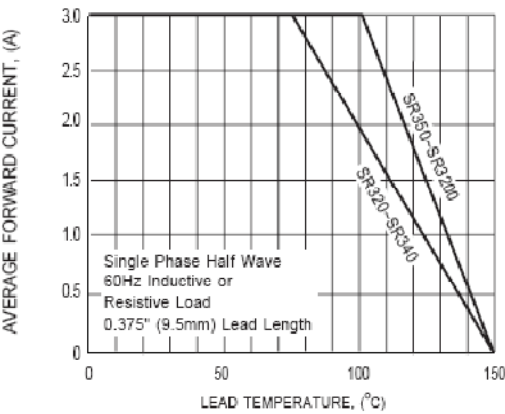


FIG.1 TYPICAL FORWARD CURRENT
DERATING CURVE

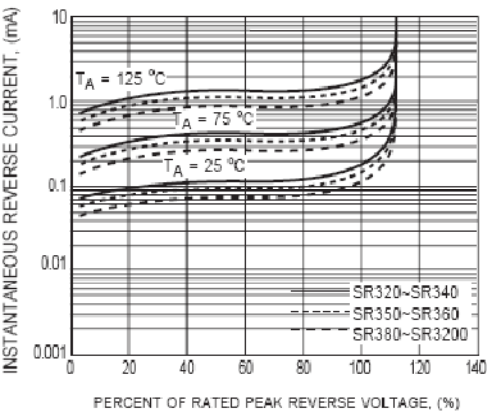


FIG.2 TYPICAL REVERSE
CHARACTERISTICS

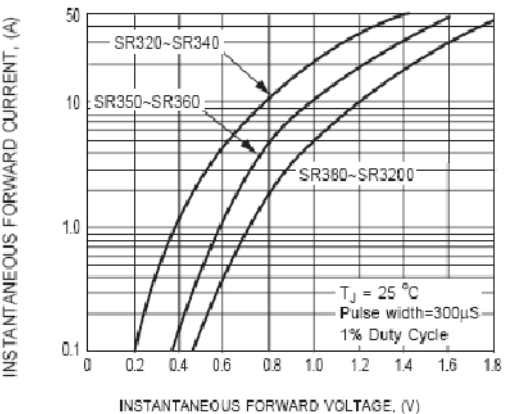


FIG.3 TYPICAL INSTANTANEOUS FORWARD
CHARACTERISTICS

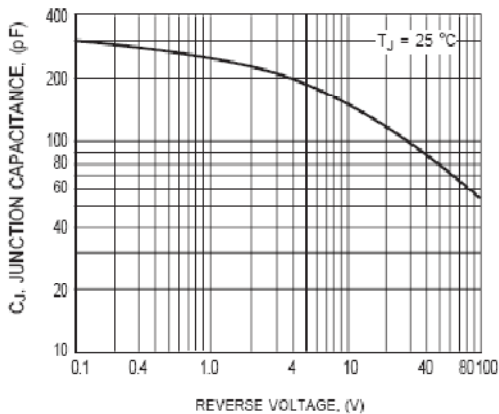


FIG.4 TYPICAL JUNCTION CAPACITANCE

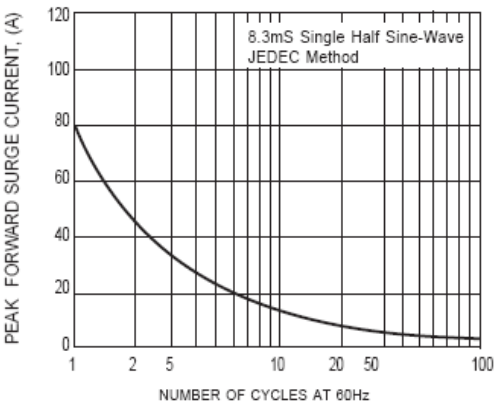


FIG.5 MAXIMUM NON-REPETITIVE FORWARD
SURGE CURRENT