


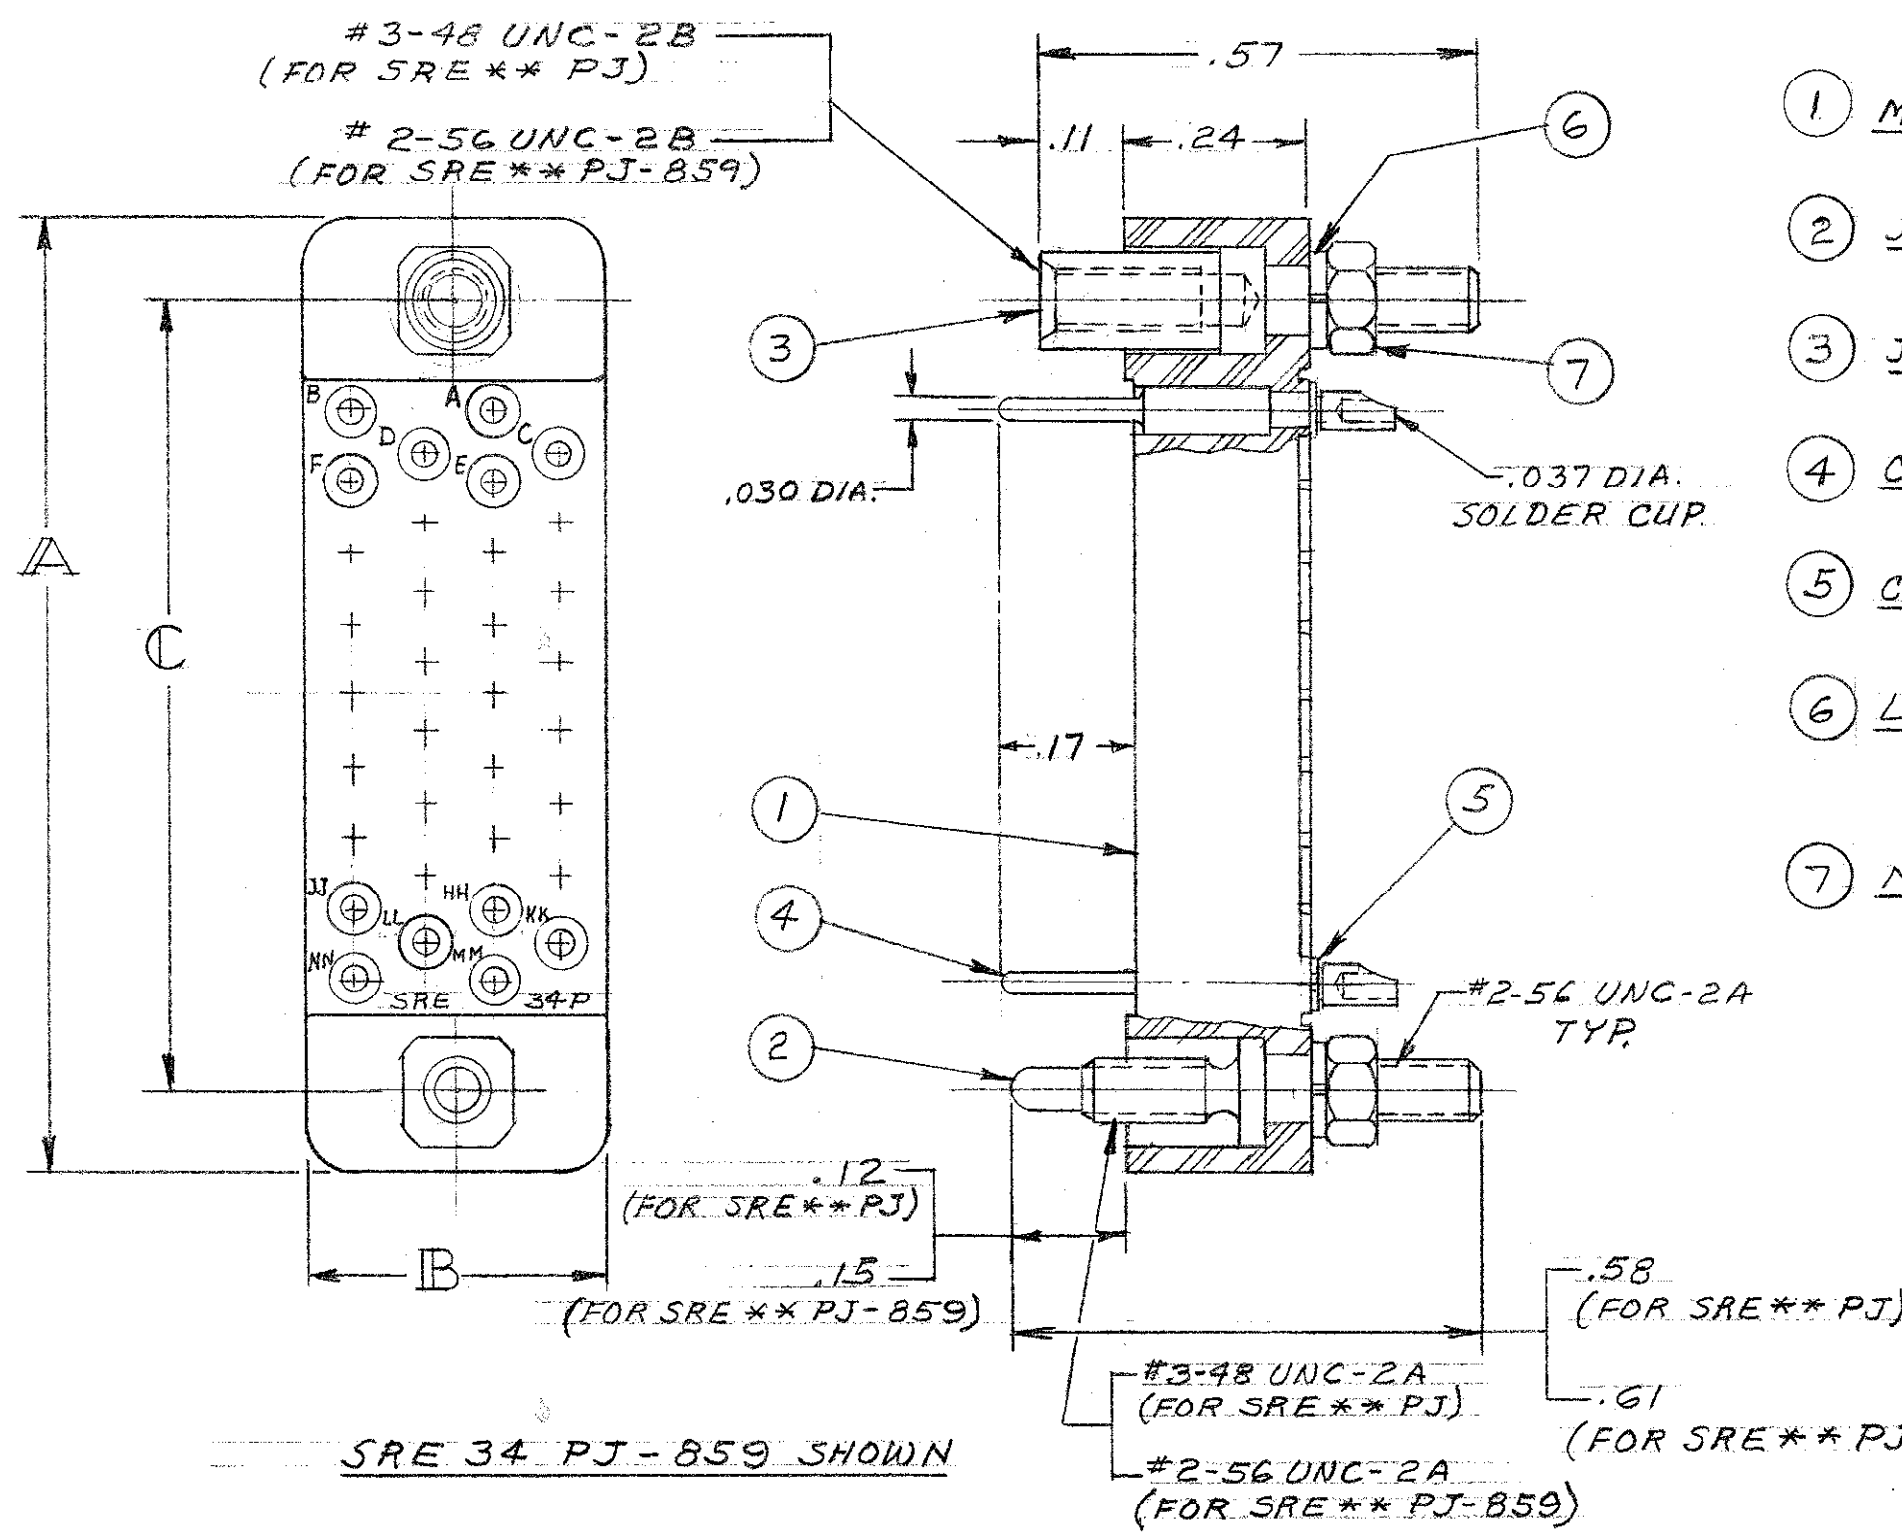


- ① MOLDING, MALE- DIALYL PHTHALATE
PER MIL-M-14, TYPE SDG-F
- ② JACKSCREW- STAINLESS STEEL, QQ-S-764
PASSIVATING DIP
- ③ JACKSOCKET- STAINLESS STEEL, QQ-S-764
PASSIVATING DIP
- ④ CONTACT PIN - BRASS, QQ-B-626,
GOLD OVER COPPER.
- ⑤ CLIP SPRING - BERYLLIUM COPPER, QQ-C-533
GOLD PLATED
- ⑥ LOCKWASHER - PHOSPHOR BRONZE, QQ-B-750
CADMIUM PLATE PLUS NATURAL IRIDITE.
- ⑦ NUT-HEX - BRASS, QQ-B-626, CADMIUM
PLATE PLUS NATURAL IRIDITE.

CATALOG NO.	CATALOG NO.	DIMENSIONS		
		A	B	C
SRE 4 PJ	SRE 4 PJ-859	.78	.21	.562
5	5	.70	.21	.482
7	7	.78	.21	.562
9	9	.88	.21	.656
11	11	.78	.28	.531
14	14	.88	.28	.625
20	20	1.06	.28	.814
26	26	1.25	.28	1.000
29	29	1.34	.28	1.094
34	34	1.25	.39	1.032
44	44	1.48	.39	1.267
SRE 50 PJ	SRE 50 PJ-859	1.63	.39	1.408

FACES OF THE "SRE" MOLDINGS

MALE CONTACT NO. 4 THRU 50

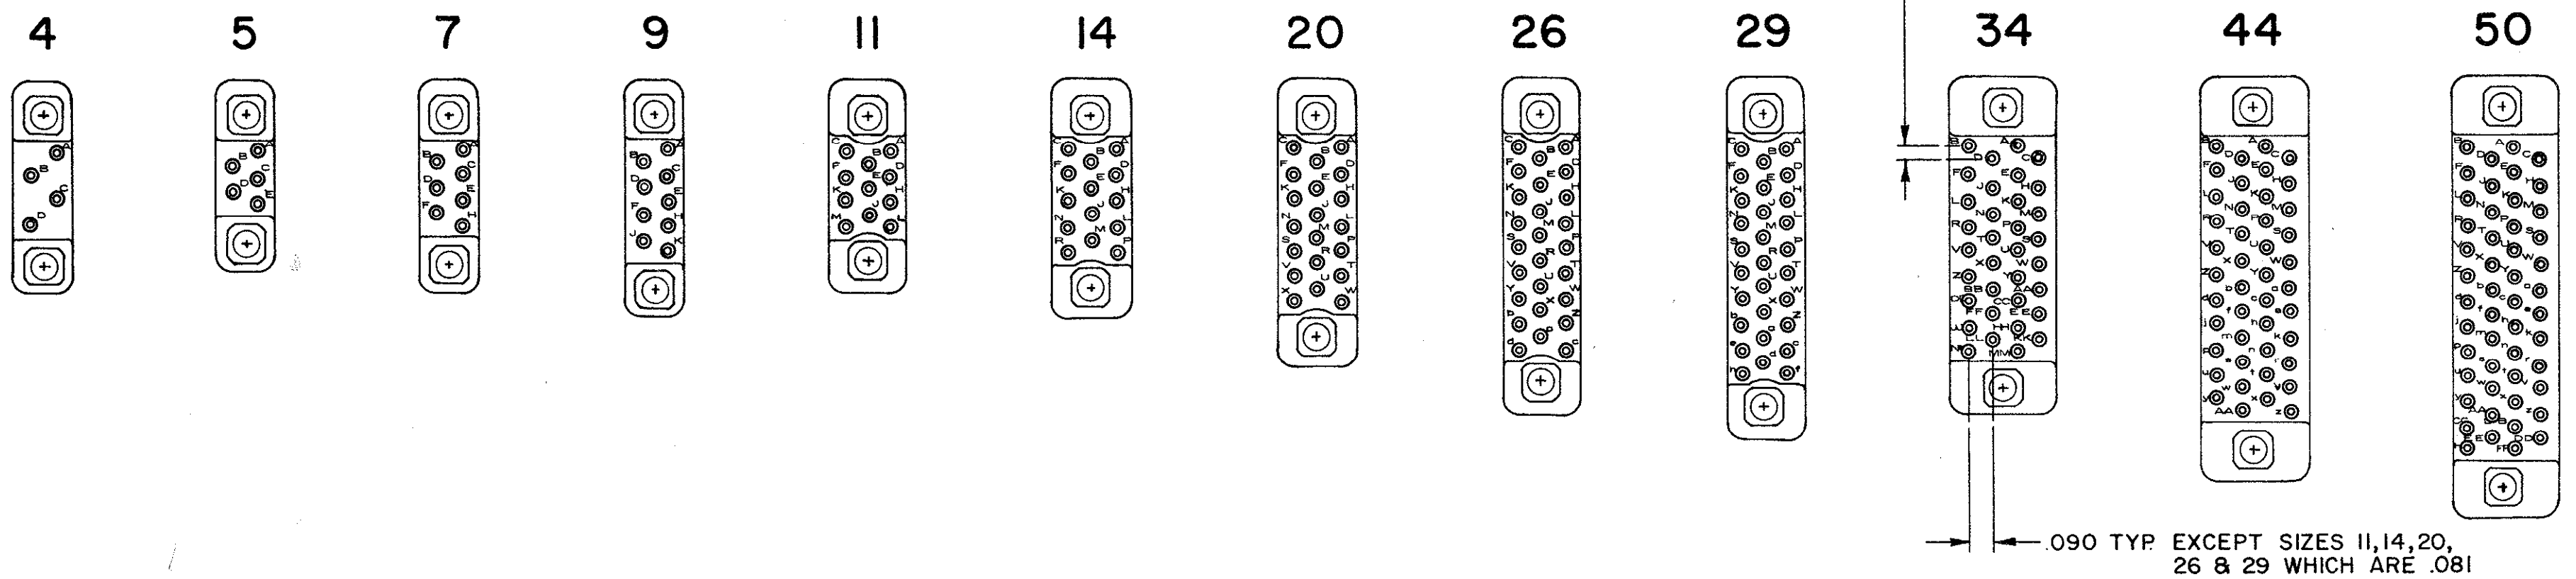

This drawing, the designs and ideas embodied in the device to which it relates, and the methods of producing the device, are the property of Winchester Electronics, and shall not be copied, reproduced, or disclosed to anyone, in any manner without the consent of Winchester Electronics.

DATE 11-30-71
S.K.
REV. 1
REDRAWN & ADDED
REVISED
CATALOG NO.
SRE**PJ-859
PER EWR # 760
EN 1/3/20
J

TOLERANCE UNLESS OTHERWISE SPECIFIED .XX = .02 .XXX = .007 ANGULAR ±

TITLE
COMPOSITE OUTLINE ASSEMBLY
SRE**PJ
SRE**PJ-859

SCALE 4X
DWG C
SIZE C

DATE 2-15-61
DATE 2-17-61
DATE 2-20-61

WINCHESTER ELECTRONICS.
OAKVILLE, CONN.

19410
J

REV. J