RECTRON
SEMICONDUCTOR
TECHNICAL SPECIFICATION

SS2 THRU SS6

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 to 60 Volts CURRENT 1.0 Ampere

FEATURES


* Low power loss, high efficiency
* Low leakage
* Low forward voltage
* High current capability
* High speed switching
* High surge capabitity
* High reliability

MECHANICAL DATA

* Epoxy: Device has UL flammability classification 94V-O
* Mounting position: Any
* Weight: 0.016 gram



SOD-123F

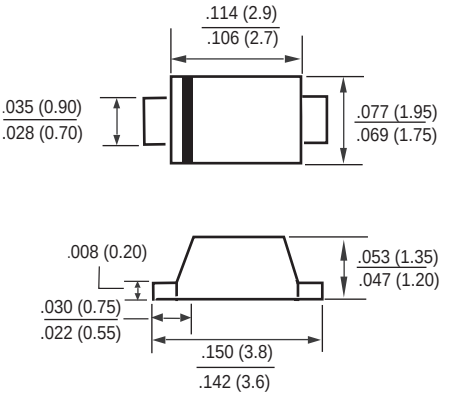

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At T_A = 25°C unless otherwise noted)

RATINGS	SYMBOL	SS2	SS3	SS4	SS5	SS6	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	Volts
Maximum Average Forward Rectified Current .375" (9.5mm) lead length at T_A-55°C	I_O	1.0					Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	20					Amps
Typical Junction Capacitance (Note1)	C_J	150					pF
Operating Temperature Range	T_J	-55 to + 150					°C
Storage Temperature Range	T_{STG}	-55 to + 150					°C

ELECTRICAL CHARACTERISTICS (At T_A = 25°C unless otherwise noted)

CHARACTERISTICS		SYMBOL	SS2	SS3	SS4	SS5	SS6	UNITS
Maximum Instantaneous Forward Voltage at 1.0A DC		V_F	.55			.70		Volts
Maximum Average Reverse Current	@T_A = 25°C	I_R	1.0					mAmps
at Rated DC Blocking Voltage	@T_A = 100°C		10					mAmps

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
2. "Fully ROHS compliant", "100% Sn plating (Pb-free)".

2006-3
REV:A

RATING AND CHARACTERISTIC CURVES (SS2 THRU SS6)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

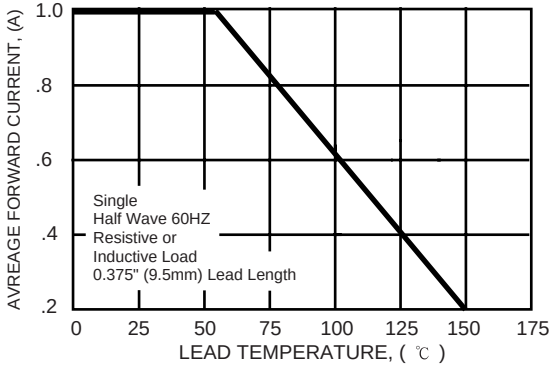


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARCTERISTICS

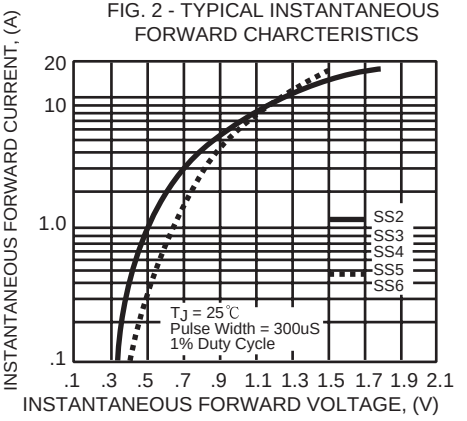


FIG. 3A - TYPICAL REVERSE CHARACTERISTICS

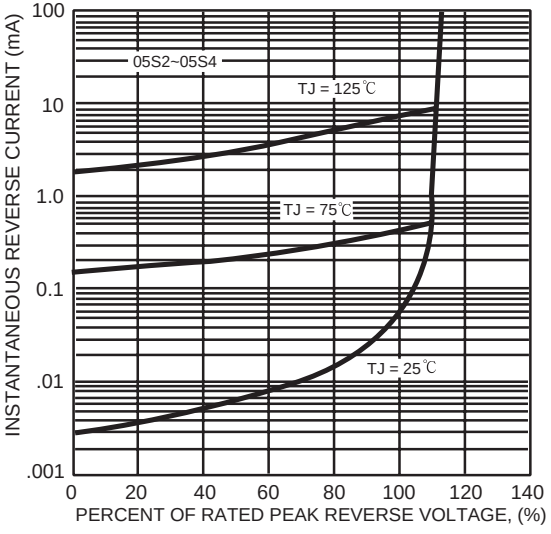


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

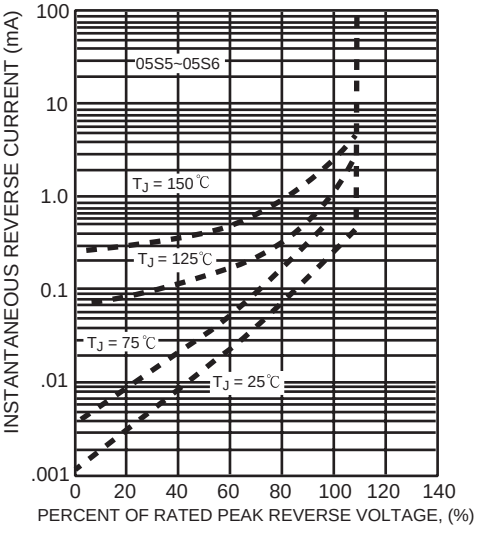


FIG. 4 - TYPICAL JUNCTION CAPACITANCE



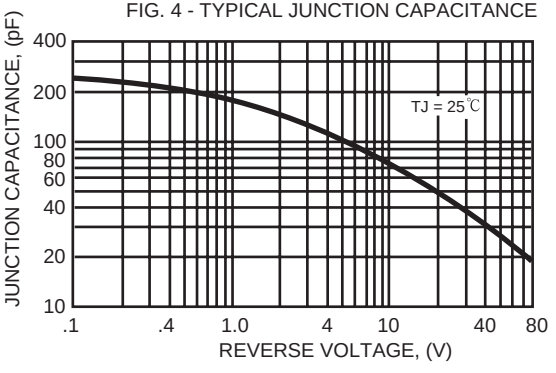


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

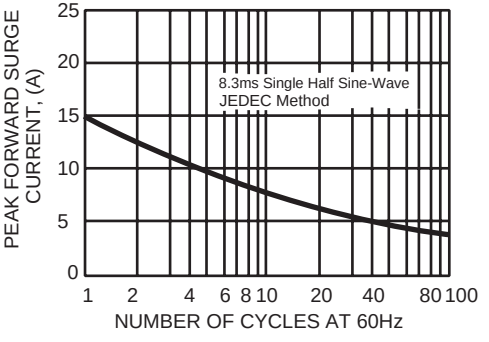

Mounting Pad Layout

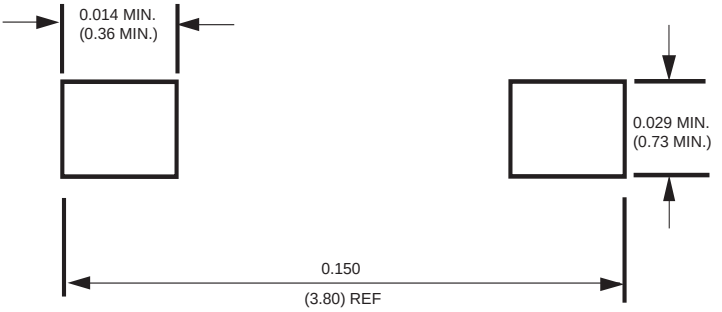

Dimensions in inches and (millimeters)