

400mA Low-dropout Linear Voltage Regulator with Voltage Detector Function

FEATURES

- Including MOSFET for V_{OUT1} , LDO for V_{OUT2} , voltage detector and shutdown control
- Low dropout voltage of 550mV (typ.) at 400mA output current (V_{OUT2})
- Guaranteed 700mA output current for V_{OUT1} and 400mA for V_{OUT2}
- Low ground current of 120 μ A
- Output voltage accuracy of 2% for V_{OUT2}
- Current limit function
- Built-in voltage detector
- Shutdown control for V_{OUT1} and V_{OUT2}

APPLICATIONS

- Voltage Regulator for DVD-ROM and CD-ROM Drives
- Voltage Regulator for HDD and Floppy Drives
- Voltage Regulator for circuits with Stepping Motors or Servo Motors

DESCRIPTION

The SS6729 is a low dropout linear regulator with voltage detection function.

It can be divided into four main functional blocks, including a MOSFET for V_{OUT1} , an LDO for V_{OUT2} , a voltage detector and two shutdown controls.

The voltage detector can be used to detect V_{CC} . The detecting voltage of the voltage detector is from 3.0V to 4.6V in 0.1V steps, and the output (D_{OUT}) of the V_{CC} voltage detection has an adjustable delay time before indicating V_{CC} . The user only needs to add one external capacitor to implement it. When V_{CC} is below the set detection voltage, D_{OUT} is at logic-low.


V_{OUT1} is controlled by the SD1 pin. When SD1 is logic-high, the internal MOSFET for V_{OUT1} is switched off, and vice versa.

The LDO output voltage (V_{OUT2}) is from 1.8V to 4.0V with 0.1V step for different application. It is also controlled by SD2 pin. When SD2 is logic high, the internal LDO for V_{OUT2} will be shutdown, vice versa.

The superior characteristics of the SS-6729 include very low dropout voltage, and 2% accuracy output voltage. Typical ground current remains 120 μ A, from no load to maximum loading conditions. Dropout voltage of V_{OUT2} is 550mV at 400mA output current. Output current limiting is provided at V_{OUT1} and V_{OUT2} .

SS6729 comes in the popular SO8 package.

TYPICAL APPLICATION CIRCUIT

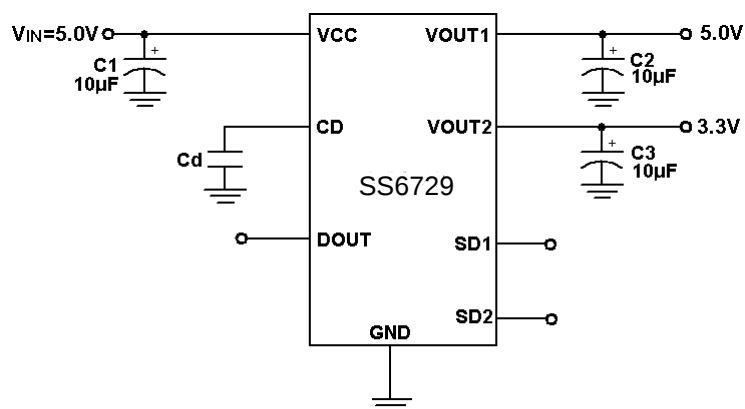

Power Source for CD-drivers and DVD-drivers

ORDERING INFORMATION

SS6729XXXX-CXXX

Packing type
TB: tubes (PDIP is only available in tubes)
TR: tape and reel

Package type
N: plastic DIP
S: small outline


LDO output voltage
18: 1.8V
:
:
40: 4.0V

Voltage detector voltage
30: 3.0V
:
:
46: 4.6V

LDO output voltage and voltage detector are available on 0.1V increments

PIN CONFIGURATION

Top view

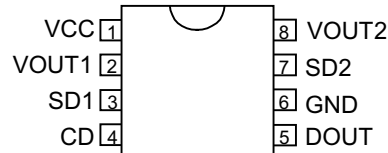

Example: SS6729-3018CSTR

→ 3.0V voltage detector, 1.8V LDO output
voltage, in SO-8, shipped on tape and reel

ABSOLUTE MAXIMUM RATINGS

Input Supply Voltage	-0.3~8V
Operating Ambient Temperature Range	-40°C~ 85°C
Storage Temperature Range	-65°C~150°C
Thermal Resistance θ_{JA}	
SOIC Package	100°C/W
SOIC Package (with 3 square inches of Copper).....	90°C/W

ELECTRICAL CHARACTERISTICS

($T_A = 25^\circ\text{C}$, $V_{IN} = 5.0\text{V}$, $I_{OUT1} = I_{OUT2} = 400\text{mA}$,
SD1 = SD2 = low, unless otherwise specified)

PARAMETER	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Ground Current	I _{OUT1} =0.1mA~700mA I _{OUT2} =0.1mA~400mA V _{IN} = 4.0V~8.0V		120	200	μA
Output Voltage Temperature Coefficiency	(Note 1)		100		PPM/°C
VOUT1					
Output MOSFET Resistance	V _{IN} = 5.0V		370	450	mΩ
Current Limit(Note 3)		700	950		mA
Output Turn-on Rise Delay			100		μs
Output Turn-on Rise Time			1000		μs
SD1 Pin Voltage	V _{SD} =Logic"0"			0.8	V
	V _{SD} =Logic"1"	2.4			
VOUT2 (1.8V ~ 4.0V with 0.1V step)					
LDO Output Voltage	No Load	V _{SET} × 0.98	V _{SET}	V _{SET} × 1.02	V
Line Regulation	I _L =1mA,V _{IN} =4.0V~8.0V		3	10	mV
Load Regulation (Note 2)	V _{IN} =5V,I _L =0.1mA~400mA		50	90	mV
Current Limit (Note 3)		400	650		mA

ELECTRICAL CHARACTERISTICS (cont'd.)

PARAMETER	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Dropout Voltage (Note 4)	$V_{OUT} \geq 3.3V$	$I_L=100mA$		140	200	mV
		$I_L=200mA$		280	350	
		$I_L=300mA$		420	500	
		$I_L=400mA$		550	700	
	$2.5V \leq V_{OUT} < 3.3V$	$I_L=100mA$		250	300	
		$I_L=200mA$		420	500	
		$I_L=300mA$		600	700	
		$I_L=400mA$		780	900	
	$V_{OUT} < 2.5V$	$I_L=100mA$		700	800	
		$I_L=200mA$		880	950	
		$I_L=300mA$		1050	1150	
		$I_L=400mA$		1220	1400	
SD2 Pin Voltage	$V_{SD} = \text{Logic} "0"$				0.8	V
	$V_{SD} = \text{Logic} "1"$		2.4			
Voltage Detector (3.0V ~ 4.6V with 0.1V step)						
Detect Voltage(V_{DET})			$V_{DSET} \times 0.98$	V_{DSET}	$V_{DSET} \times 1.02$	V
Detect Threshold Hysteresis				$V_{DET} \times 1.05$		V
V_{DOUT}	When V_{DET} is Detected				0.6	V
	When V_{DET} is not Detected		1.65			
Delay Time	CD Pin Open			1	3	ms

Note 1: Guaranteed by design.

Note 2: Regulation is measured at constant junction temperature, using pulse testing with a low ON time.

Note 3: Current limit is measured by pulsing a short time.

Note 4: Dropout voltage is defined as the input to output differential at which the output voltage drops 100mV below the value measured with a 1V differential.

TYPICAL PERFORMANCE CHARACTERISTICS

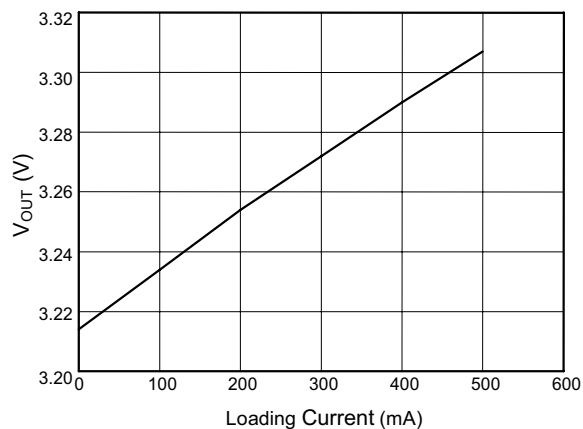


Fig. 1 Output voltage vs. Loading Current

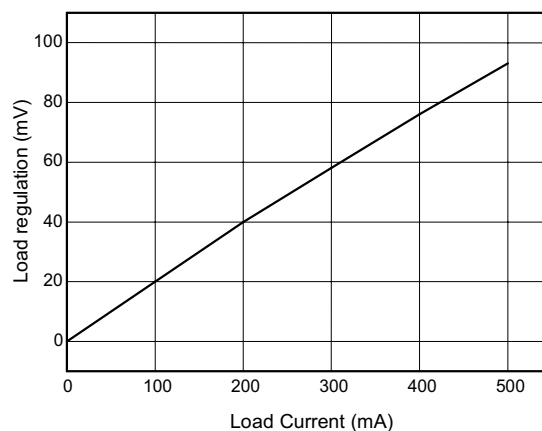


Fig. 2 Load Regulation

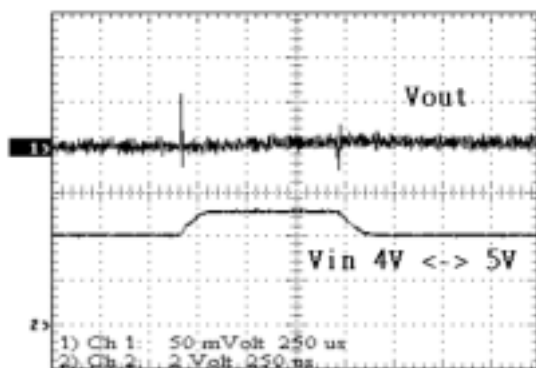


Fig. 3 Line Transient

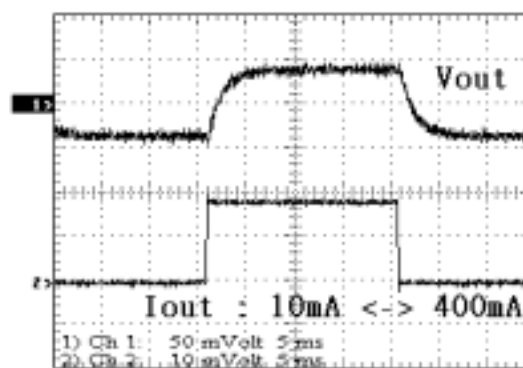
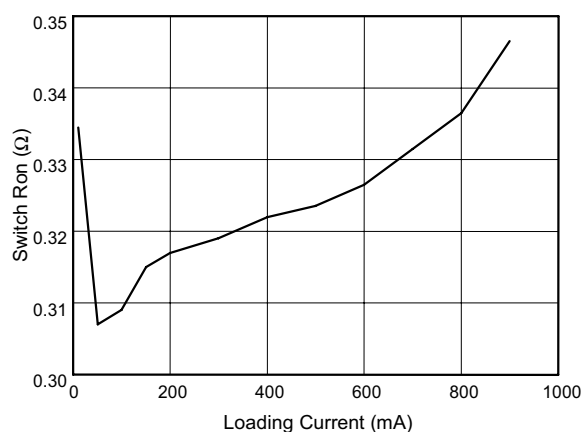
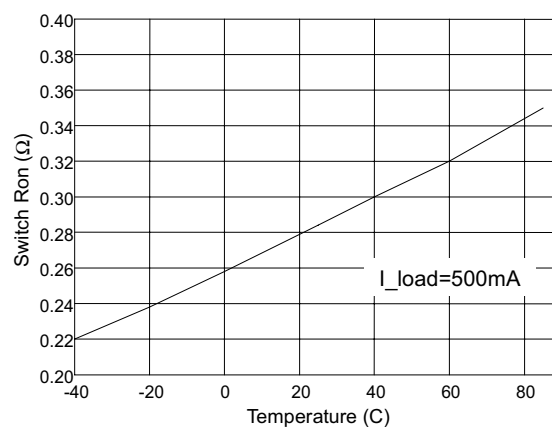


Fig. 4 Load Transient


Fig. 5 Switch R_{on} vs. Loading current (mA)

Fig. 6 Switch R_{on} vs. Temperature

TYPICAL PERFORMANCE CHARACTERISTICS (cont'd.)

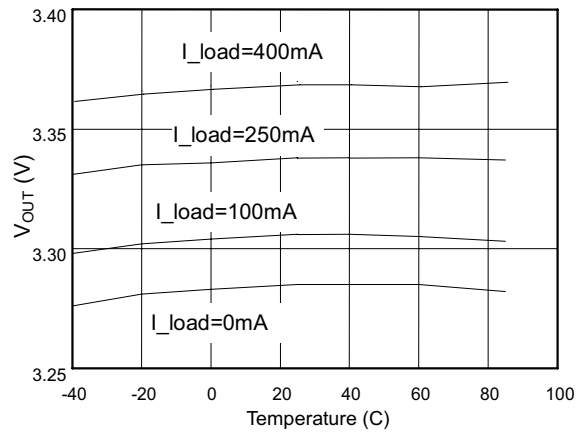


Fig. 7 Output voltage vs. Temperature

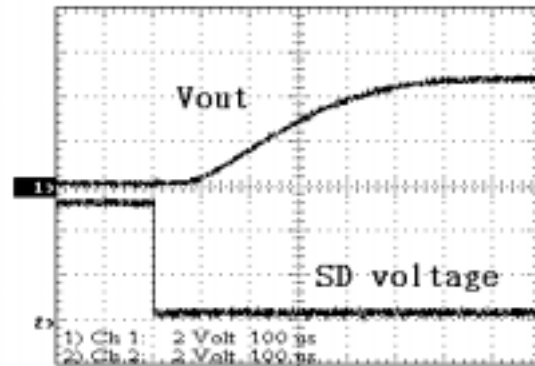


Fig. 8 Output Turn-on Rise Time

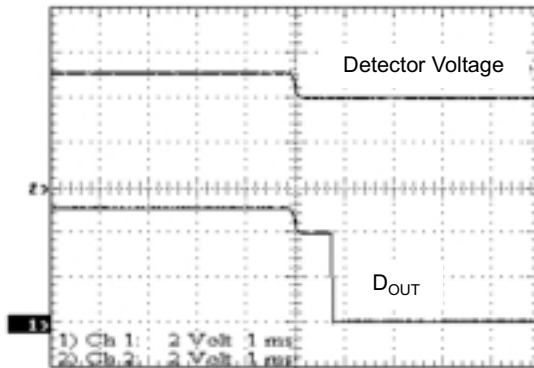


Fig. 9 Built-in Delay Time Waveform


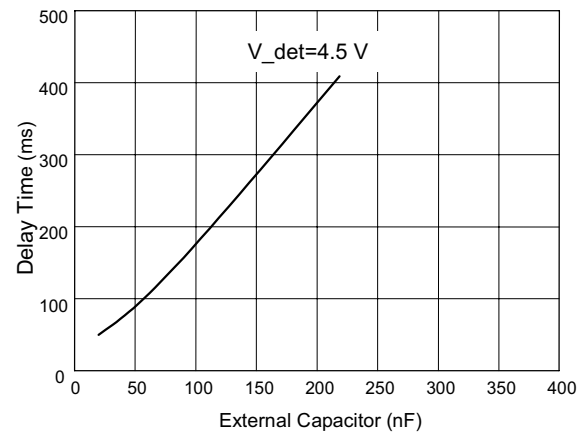


Fig. 10 Delay Time vs. External Capacitor

BLOCK DIAGRAM

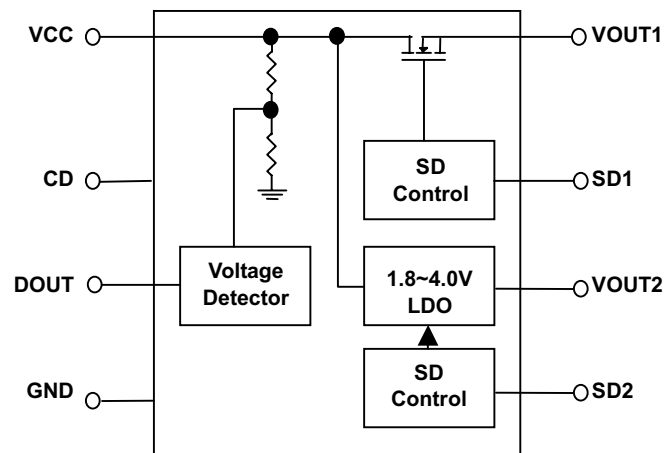


PIN DESCRIPTION

PIN 1: VCC-	This pin is the main input supply for the IC, normally 5V	PIN 4: CD-	This pin is to determine delay time by attaching a capacitor
PIN 2: VOUT1-	This pin is the voltage output which is connected to Vcc directly via internal MOSFET switch, normally 5V	PIN 5: DOUT-	This pin is voltage detector output, pulled low when V_{IN} detected
PIN 3: SD1-	VOUT1 shutdown pin. Logic high input for disabling the internal MOS Switch.	PIN 6: GND-	IC ground pin
		PIN 7: SD2-	VOUT2 shutdown pin. Logic high input for disabling LDO output.
		PIN 8: VOUT2-	This pin is 3.3V LDO voltage output


PHYSICAL DIMENSIONS

8-lead plastic SO (units: mm)

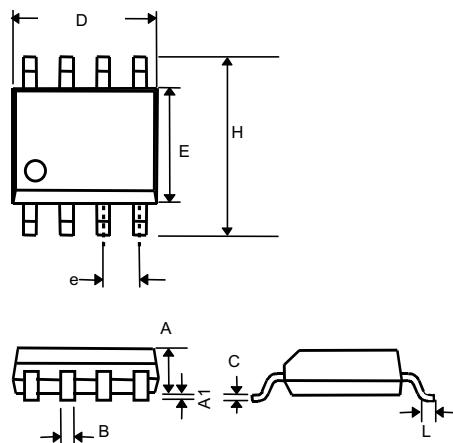

SYMBOL	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27(TYP)	
H	5.80	6.20
L	0.40	1.27

8 lead plastic DIP (units: mm)

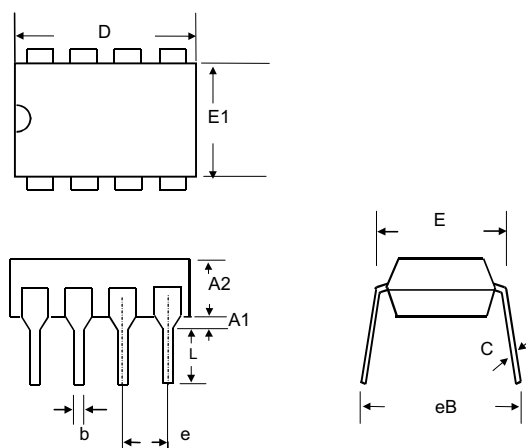

SYMBOL	MIN	MAX
A1	0.381	—
A2	2.92	4.96
b	0.35	0.56
C	0.20	0.36
D	9.01	10.16
E	7.62	8.26
E1	6.09	7.12
e	2.54 (TYP)	
eB	—	10.92
L	2.92	3.81

Information furnished by Silicon Standard Corporation is believed to be accurate and reliable. However, Silicon Standard Corporation makes no guarantee or warranty, express or implied, as to the reliability, accuracy, timeliness or completeness of such information and assumes no responsibility for its use, or for infringement of any patent or other intellectual property rights of third parties that may result from its use. Silicon Standard reserves the right to make changes as it deems necessary to any products described herein for any reason, including without limitation enhancement in reliability, functionality or design. No license is granted, whether expressly or by implication, in relation to the use of any products described herein or to the use of any information provided herein, under any patent or other intellectual property rights of Silicon Standard Corporation or any third parties.