

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014/07/31	Cary	Change To Rev.A

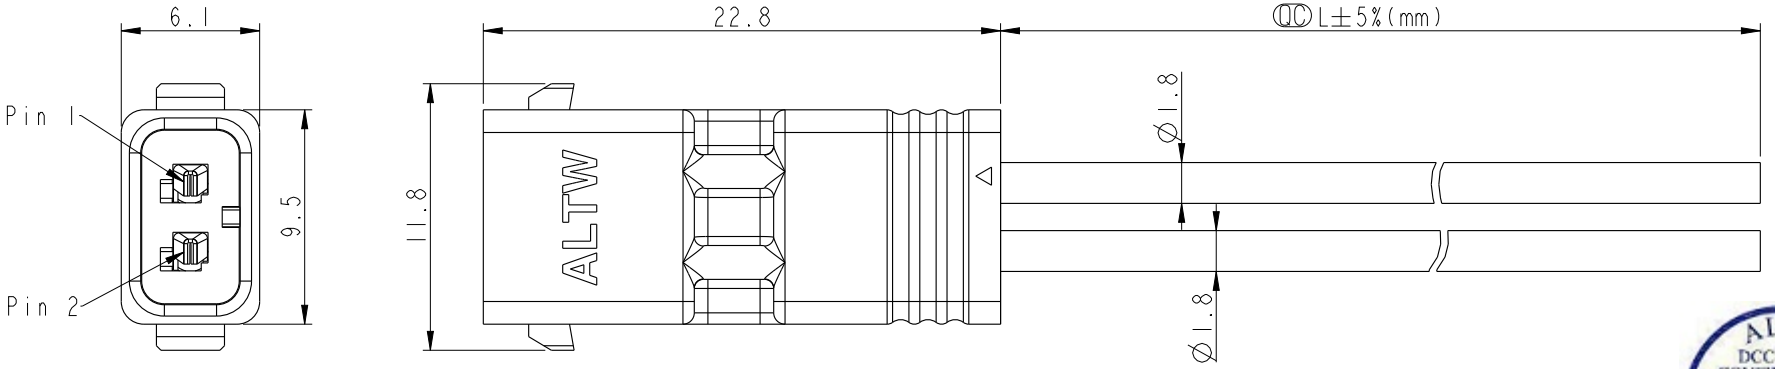

Conn.

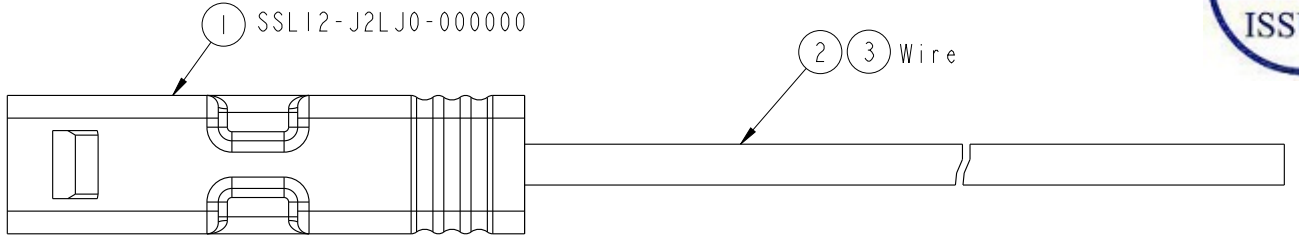

ALTW
DCC. DEPT.
CONFIDENTIAL
2014.08.12
ISSUED

ALTW
CONFIDENTIAL
2014-07-31
R&D DEPT.

SSL12-J2LJ0-020AXX

01: L=100±20mm
02: L=200±20mm
04: L=400±25mm
Standard Length is 400mm.
Wire Length Range(L): 100~9900mm

20: 20AWG

Notes:
* QC Important Dimension To Check.
* Waterphoof Rate: IP68(mating)
  1M Depth Of Water In 24 Hours.
* Housing: Thermoplastic, UL94V-0, Natural White.
* Terminal: Copper Alloy,Gold Plated on contact area.
* Seals: Silicone, Gray.
* Wire: UL1430 20AWG.
* Current Rating : 5A maximum.
* Voltage Rating: 250V DC/AC maximum.
* Operating Temperature: -40~+105°C.

2	Red 紅
1	Brown 棕
Conn.	Wire
Pin-out	

UNIT:mm

TOLERANCE
±0.50mm

TITLE: SSL1.2 2P WIRE ASS'Y JACK TO OPEN

SCALE 3:1 | SIZE A4 | SHEET 1 OF 1

REV. A | WC-REV. A.5 | QC:Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY: Cary	DATE: 2014-07-31
DWG NO: SSL12-J2LJ0-020AXX	CHECKED BY: Fisher	DATE: 2014-07-31
CUSTOMER: ALTW	APPROVED BY: Jerry	DATE: 2014-07-31

FMW10702-01-02A1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.