PRELIMINARY

SSR1008/59
SSR1009/59
SSR1010/59

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada,CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


Designer's Data Sheet

10 AMP 80-100 VOLTS SCHOTTKY RECTIFIER

FEATURES:

- Extremely Low Forward Voltage Drop
- Low Reverse Leakage
- Hermetically Sealed Isolated Power Package
- Guard ring for overvoltage protection
- Eutectic Die Attach
- 175°C Operating Junction Temperature
- TX, TXV, and Space Level Screening Available

TO-59



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage **SSR1008/59** **SSR1009/59** **SSR1010/59**	V_{RRM} V_{RWM} V_R	80 90 100	**Volts**
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	I_O	10	**Amps**
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on Io, allow junction to reach equilibrium between pulses, TA=25°C)	I_{FSM}	200	**Amps**
Operating and storage temperature	**Top & Tstg**	-65 to +175	**°C**
Maximum Thermal Resistance Junction to Case	$R_{\theta JC}$	1.4	**°C/W**

SSR1008/59
SSR1009/59
SSR1010/59

PRELIMINARY

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada,CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (I_F = 1 Adc, T_A=25°C, 300µs Pulse) (I_F = 5 Adc, T_A=25°C, 300µs Pulse) (I_F =10 Adc, T_A=25°C, 300µs Pulse)	V_{F1}	0.56 0.79 0.90	Vdc
Instantaneous Forward Voltage Drop (I_F = 10 Adc, T_A= - 55°C, 300µs Pulse)	V_{F2}	0.82	Vdc
Reverse Leakage Current (Rated VR, T_A=25°C, 300µs pulse minimum)	I_{R1}	10	µA
Reverse Leakage Current (Rated V_R, T_A=100°C, 300µs pulse minimum)	I_{R2}	500	µA
Junction Capacitance (V_R = 10 Vdc, T_A=25°C, f= 1 MHz)	C_J	300	pf

CASE OUTLINE: TO-59

PIN OUT:

PIN 1: ANODE
PIN 3: CATHODE

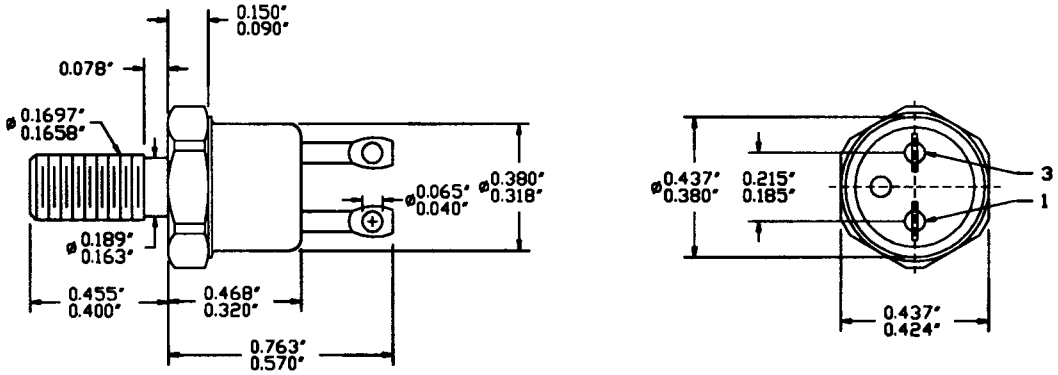

TYPICAL OPERATING CURVES

(TA=25°C Unless otherwise specified)

