PRELIMINARY

SSR2045-28

SOLID STATE DEVICES, INC

14849 Firestone Boulevard · La Mirada,CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424


Designer's Data Sheet

20 AMP 45 VOLTS SCHOTTKY RECTIFIER

FEATURES:

- Low Reverse Leakage
- Low Forward Voltage Drop
- Hermetically Sealed Surface Mount Package
- Guard Ring for Overvoltage protection
- Eutectic Die Attach
- 175°C Operating Temperature
- TX, TXV and Space Level Screening Available

28 PIN CLCC



MAXIMUM RATINGS

RATING	SYMBOL	VALUE	UNIT
Peak Repetitive Reverse and DC Blocking Voltage	V_{RRM} V_{RWM} V_R	45	**Volts**
Average Rectified Forward Current (Resistive Load, 60Hz, Sine Wave, TA=25°C)	I_O	20	**Amps**
Peak Surge Current (8.3 ms Pulse, Half Sine Wave Superimposed on Io, allow junction to reach equilibrium between pulses,TA=25°C) *note 1*	I_{FSM}	100	**Amps**
Operating and storage temperature	**Top & Tstg**	-65 to +175	**°C**
Maximum Thermal Resistance Junction to Case	$R_{\theta JC}$	4.0	**°C/W**

Note 1: All pins tied together

SSR2045-28

PRELIMINARY


SOLID STATE DEVICES, INC
14849 Firestone Boulevard · La Mirada,CA 90638
Phone: (714) 670-SSDI (7734) · Fax: (714) 522-7424

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MAXIMUM	UNIT
Instantaneous Forward Voltage Drop (I_F = 10 Adc, T_A=25°C, 300µs Pulse) (I_F = 20 Adc, T_A=25°C, 300µs Pulse)	V_{F1}	0.65 0.89	Vdc
Instantaneous Forward Voltage Drop (I_F = 10 Adc, T_A= - 55°C, 300µs Pulse)	V_{F2}	0.71	Vdc
Reverse Leakage Current (Rated V_R, T_A=25°C, 300µs pulse minimum)	I_{R1}	200	µA
Reverse Leakage Current (Rated V_R, T_A=100°C, 300µs pulse minimum)	I_{R2}	20	mA
Junction Capacitance (V_R = 10 Vdc, T_A=25°C, f= 1 MHz)	C_J	800	pf

CASE OUTLINE: 28 PIN CLCC
PIN OUT:

PIN 5-11: CATHODE
PIN 1, 15-28: ANODE
PIN 2, 3, 13, 14: N/C

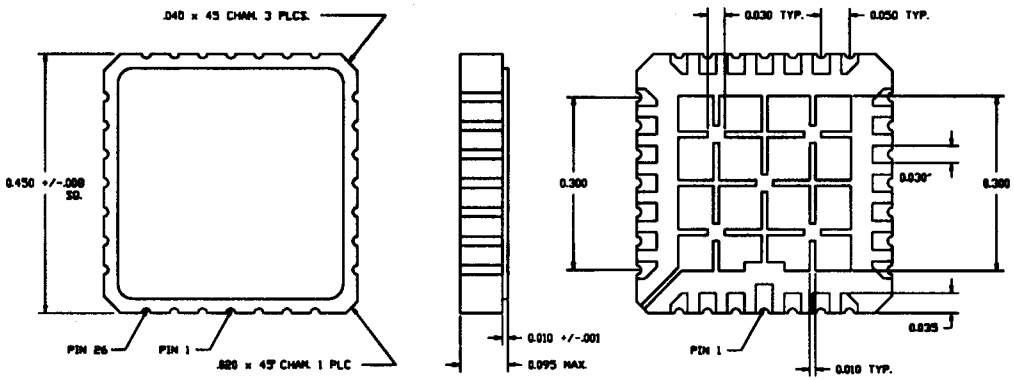

TYPICAL OPERATING CURVES
(TA=25°C Unless otherwise specified)

