


Features

- Robustly constructed
- Nickel plated solid brass actuator
- Electrical life 20,000 cycles
- Mechanical life 100,000 cycles

Applications

- Audio products
- Industry
- Medical



Part Numbering Guide

S SW FS - S01 - A C 11 - HWH - C25

SUNTSU

SWITCH

FOOT SWITCH

SERIES NUMBER

SWITCH FUNCTION

A : SPST OFF-(ON)

BUSHING AND BUTTON SPEC
 C : Button 8.7Ø, Bushing 8.0mm

TERMINAL CODE
 11 : Wire

ACCESSORIES

H : Hex Nut
 W : Spring Washer
 L : Lock Washer
 F : Flat Washer

CONNECTOR
 C25 : W/ Connector
 Pitch 2.5mm





Cage Code: 4GUT4

Electrical and Material Parameters


Rating	6A 125V AC, 3A 250VAC
Contact Resistance	50mΩ Max
Insulation Resistance	DC 500V 100MΩ Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C ~ 65°C
Switch Function	2P SPST OFF-(ON), PUSH ON
Accessories	2 HEX Nut & 1 SPRING Washer Assembly
Frame	Black, PF
Materials Actuator	Ni-plated, Brass
Terminals	Silver plated, Copper Alloy

Test Circuit & Mounting Hole

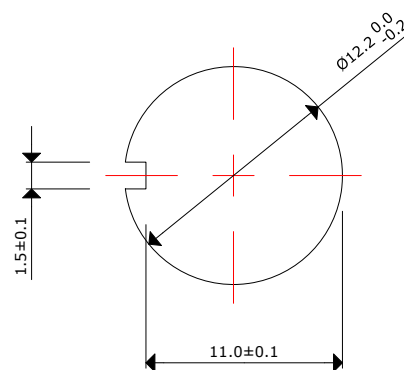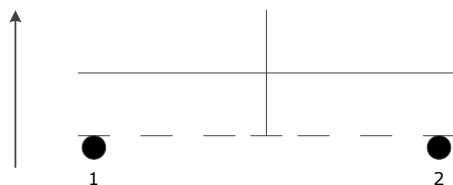

Outline Drawing

All dimensions are in millimeters (mm) unless otherwise noted. Drawings are not to scale.

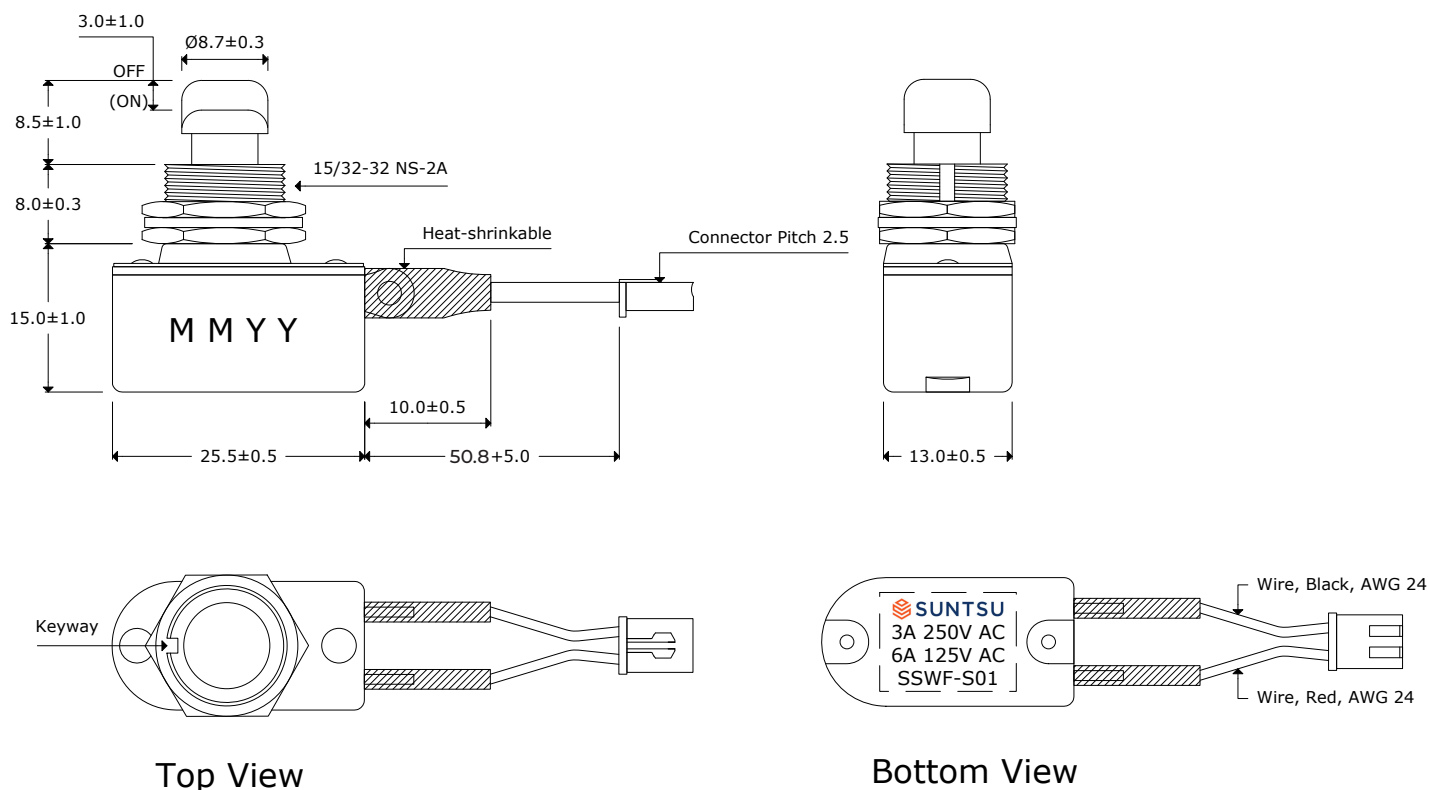

Remarks:

1. 500pcs per 1 master carton
2. Electrical life 20,000 cycles
3. Mechanical life 100,000 cycles