
POWER TRANSFORMER

ST2-20 (F) SERIES


1. CONFIGURATION & DIMENSIONS :

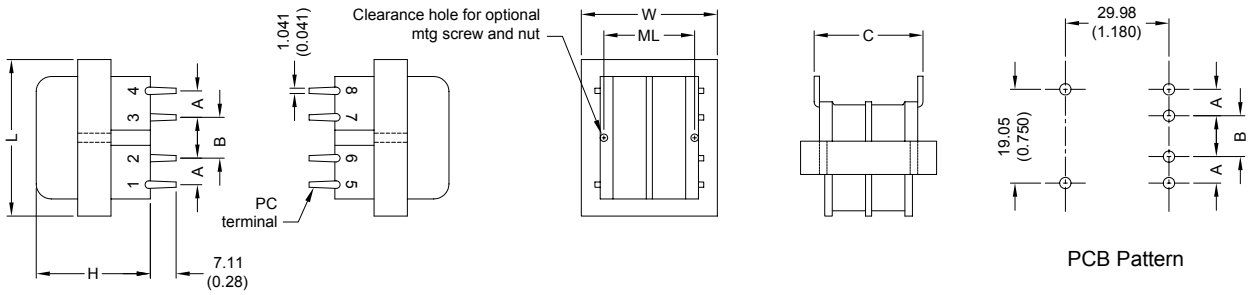

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
2	1.1	35.50	30.00	24.00	----	6.35	6.35	30.48	None	70
		(1.40)	(1.180)	(0.95)	----	(.250)	(.250)	(1.200)		

2. SCHEMATIC :



" • " indicates polarity

3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

a. Primary Voltage	AC 115 V 60 Hz .
b. No Load Primary Current	Less Than 10mA .
c. Secondary Voltage (±5%)	Series AC 25.20V .
	Parallel AC 12.60V .
d. Secondary Load Current	Series 0.055A .
	Parallel 0.11A .
e. Full Load Primary Current	Less Than 20mA .
f. Full Load Secondary Voltage (±5%)	Series 20.00V .
	Parallel 10.00V .
g. DC Resistance	
Pin 1-4	Primary = 1338 Ohm .
Pin 5-6	Secondary = 41.40 Ohm .
Pin 7-8	= 54.30 Ohm .
h. Insulation Resistance	DC 500V 100Meg Ohm Of More .
i. Withstand Voltage (Hi-Pot)	AC 2500V 60Hz 1 Minutes .
j. Temperature Rise	Less Than 60 Deg C .
k. Core Size	EI-35 x 7.00 m/m .

RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008