
The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at www.hirose-connectors.com, or contact your Hirose sales representative.

Interface Connectors for Miniature, Portable Terminal Devices

ST Series

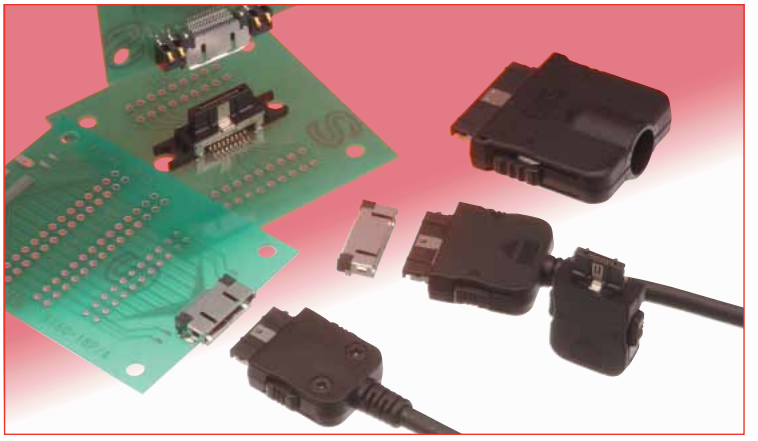

Overview

Developed as external input/output connectors for the portable and mobile devices used in consumer markets. As such, the connectors incorporate features required to assure reliable electrical and mechanical performance under extreme and unpredictable conditions.

Features

1. Strong locking mechanism

To assure continuous reliability of the connection in an unpredictable consumer environment, mated connectors will withstand pull force of 49N max. applied in any direction.

2. Prevention against reversed or angle insertion

Multiple polarization keys will not allow incorrect insertion of the mating plug.
In addition, contacts will not be damaged when the user attempts to insert only the corner of the mating plug.

3. Small size and low profile

Contact pitch of 0.5 mm and utilization of state-of-the-art manufacturing technologies has produced receptacle height of 3 mm above the board and maximum thickness of the plug of only 7 mm.

4. EMI protection

Built-in ground continuity features and EMI shielding assure interference free performance.


5. Wide variety of contact positions and mounting styles

Standard, reverse, vertical and cradle mountings, as well as utilization of variety of cables and conductors assure application of this connector in diversified applications.


Applications

Digital Still Cameras, Personal Digital Assistance, Notebook computers, Cellular phones, Portable readers, Mobile recorders and any mobile or portable device requiring high reliability small size input/output connection.


Strong locking mechanism

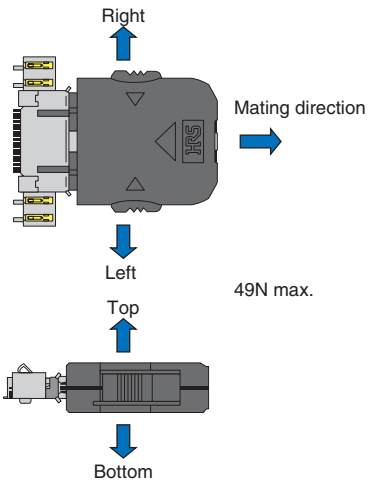

Prevention against reversed or angle insertion

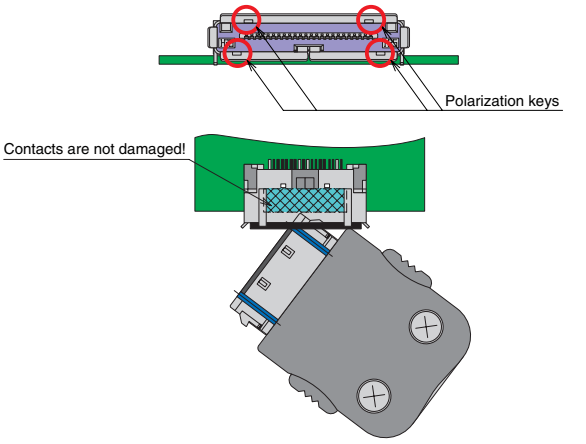

Plug variations

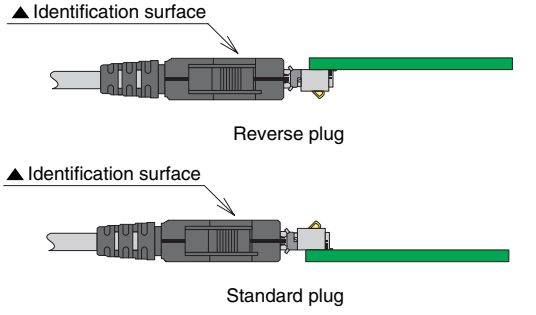

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at www.hirose-connectors.com, or contact your Hirose sales representative.

■Specifications

Rating	Current rating	0.5A (1 A max. can be carried via 4 random contacts)	Operating temperature range : -30℃ to +80℃
	Voltage rating	100V AC	Storage temperature range : -40℃ to +85℃ (Note)

Characteristic	Specification	Conditions
1. Contact resistance	60m Ω max.	100mA DC
2. Insulation resistance	100M Ω min.	250V DC
3. Dielectric withstanding voltage	No flashover or insulation breakdown.	350V AC/ one minute
4. Mating/un-mating forces	Mating: 29.4N max.	With corresponding connector.
5. Durability (mating/un-mating)	Contact resistance: 50 m Ω max.	10000 cycles
6. Shock	No electrical discontinuity of 10 μ sec. max. Contact resistance: 100m Ω max.	Acceleration of 490 m/s2, 11 ms duration, sine half-wave waveform, 3 cycles in each of the 3 axis.
7. Temperature cycle	Contact resistance: 100m Ω max. Insulation resistance: 1000M Ω min.	Temperature : -55℃ → +5℃ to +35℃ → +85℃ → +5℃ to +35℃ Time (Minutes) : 30 → 5 → 30 → 5 5 cycles
8. Salt spray	No corrosions	5±1% salt water solution at 35±3℃ for 48 hours, after washing without salt, leave for 24 hours at room temperature
9. Lock strength	Fully inserted and locked corresponding connector. No physical damage or electrical failure.	Pull force: 49N max. applied in each of the 3 axis.
10. Shock	No electrical discontinuity of 10 μ sec. max. Contact resistance: 100m Ω max.	Frequency: 10 to 55 Hz, single amplitude of 0.75mm, 2 hours, 3 axis.

Note: Includes temperature rise caused by current flow.

■Materials

● Receptacles and cradles

Component	Material	Finish	Remarks
Insulator	Thermoplastic compound, glass reinforced	Color: Black	UL94V-0
Contacts	Copper alloy	Contact area: Gold plated	————
Shield	Stainless steel	Tin alloy plating	————

● Plugs

Component	Material	Finish	Remarks
Insulator	Thermoplastic compound, glass reinforced	Color: Black	UL94V-0
Contacts	Copper alloy	Contact area: Gold plated	————
Shield	Stainless steel	————	————
Cover	Thermoplastic compound, glass reinforced	————	UL94-HB

■Ordering information

● Receptacles

ST 60 - 18 P /4 (50)
❶ ❷ ❹ ❺ ❻ ❽

● Plugs

ST 40 X - 18 S - CVR (80)
❶ ❷ ❸ ❹ ❺ ❼ ❽


● Plug - Cradle type

ST 80 X - 18 S (50)
❶ ❷ ❸ ❹ ❺ ❽

❶	Series name	: ST
❷	Termination type	
	60	: Right angle SMT
	40	: Solder type
	80	: Cradle, vertical, SMT
❸	Shield	
	X	: With shield
	Blank	: Without shield
❹	Number of positions	
❺	Contact type	
	P	: Male contact (Receptacle)
	S	: Female contact (Plug)
❻	Contact arrangement /4	: Combination, with 4 power contacts
❼	Plug type	
	CV	: Standard type, for top PCB mount
	CVR	: Reverse type, for bottom PCB mount
	CV1	: For larger diameter cables
❽	RoHS compliant	: (50), (80)


■Receptacle

● 10 pos.

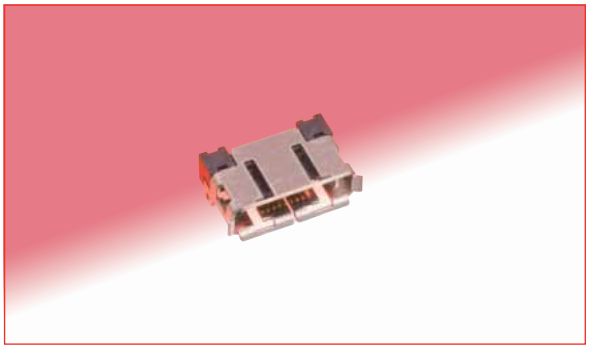


Part Number	CL No.	Packaging	RoHS
ST60-10P	CL241-0022-5	Reel packaging (1500 pieces/reel)	YES

◆Recommended PCB mounting pattern

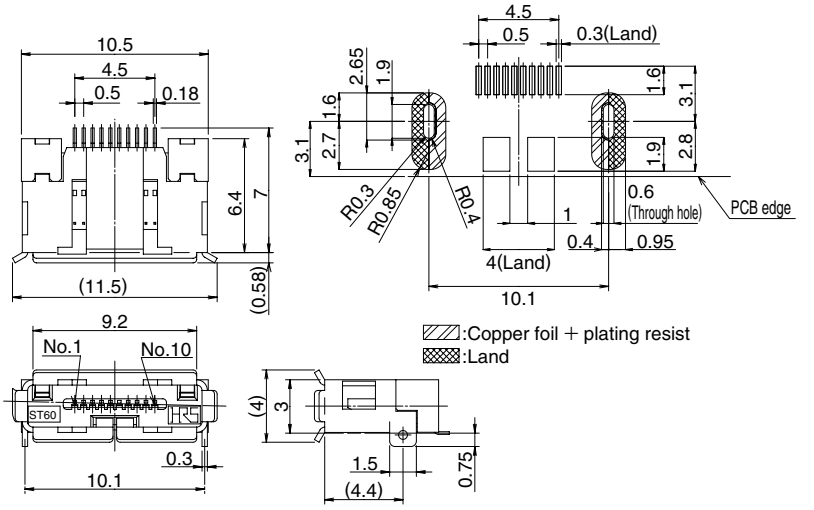


● 18 pos.

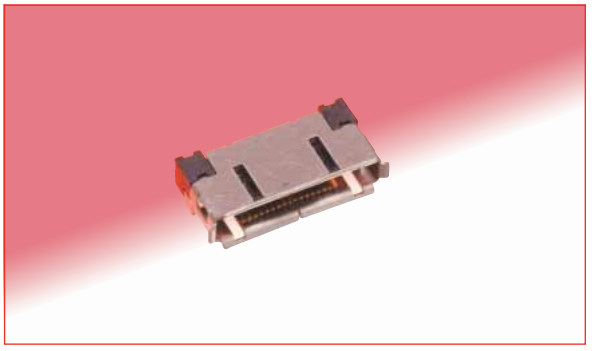


Part Number	CL No.	Packaging	RoHS
ST60-18P(50)	CL241-0011-9-50	Reel packaging (1500 pieces/reel)	YES

◆Recommended PCB mounting pattern

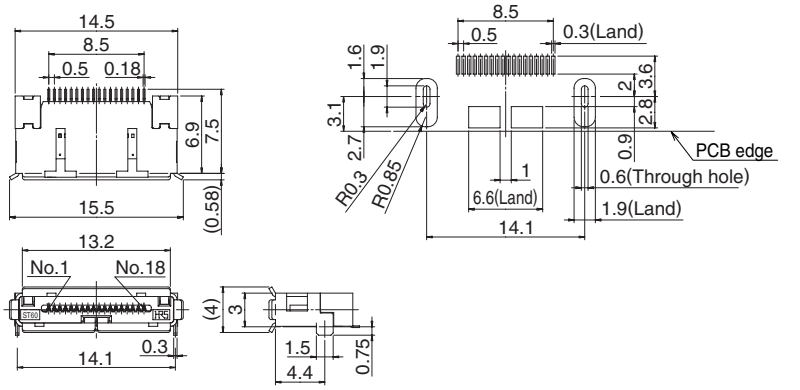


● 18 pos. with 4 power contacts

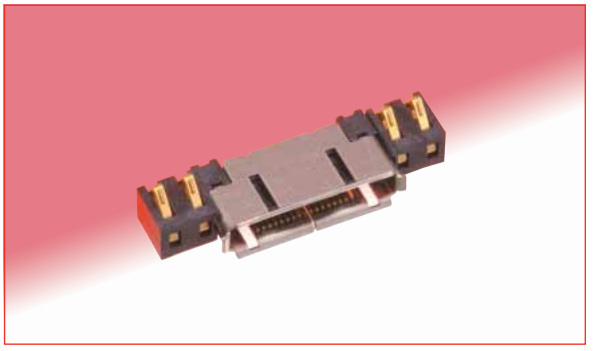


Part Number	CL No.	Packaging	RoHS
ST60-18P/4(50)	CL241-0005-6-50	Reel packaging (1000 pieces/reel)	YES

◆Recommended PCB mounting pattern

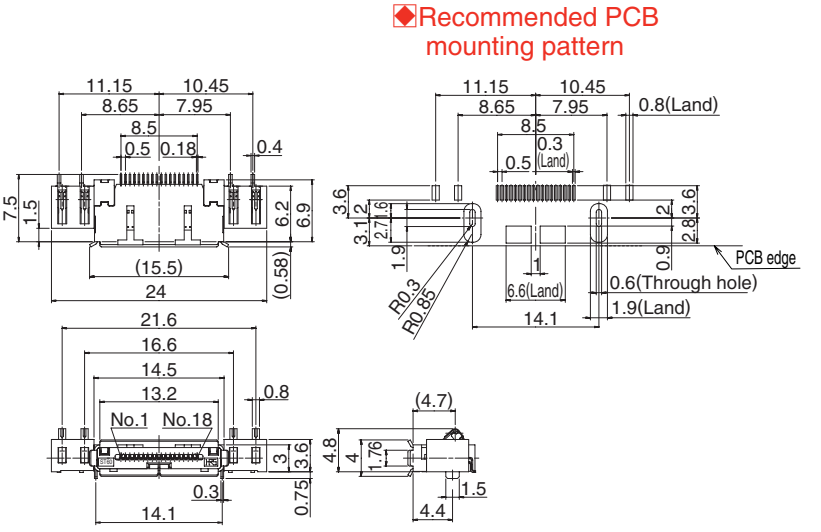


The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at www.hirose-connectors.com, or contact your Hirose sales representative.


● 24 pos.

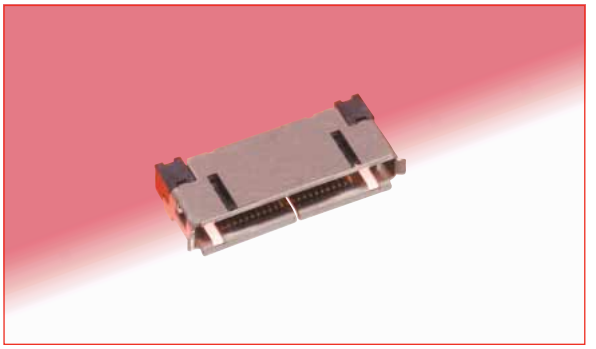


Part Number	CL No.	Packaging	RoHS
ST60-24P(50)	CL241-0003-0-50	Reel packaging (1500 pieces/reel)	YES

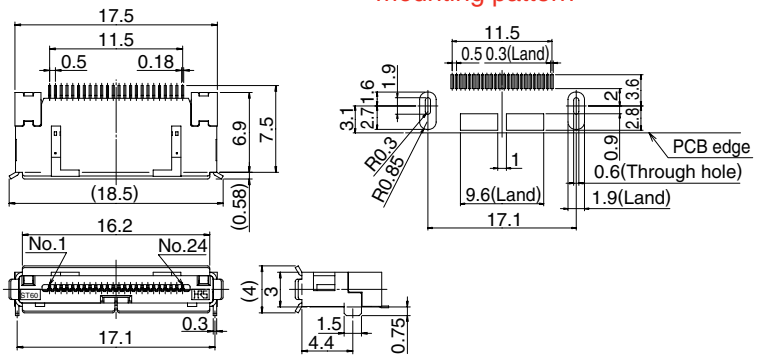


● 36 pos.

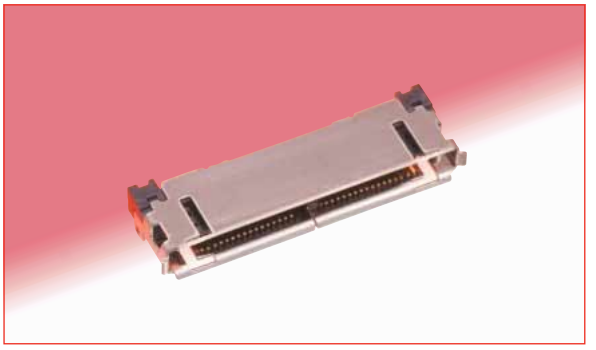


Part Number	CL No.	Packaging	RoHS
ST60-36P	CL241-0033-1	Reel packaging (1500 pieces/reel)	YES

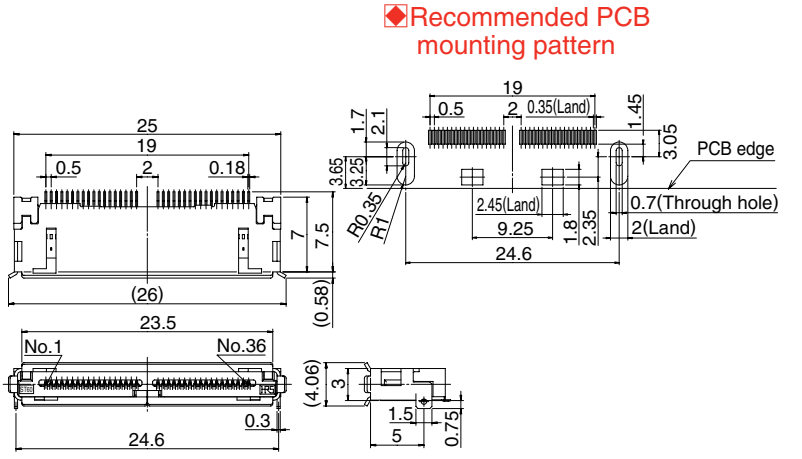

● 36 pos. reverse type

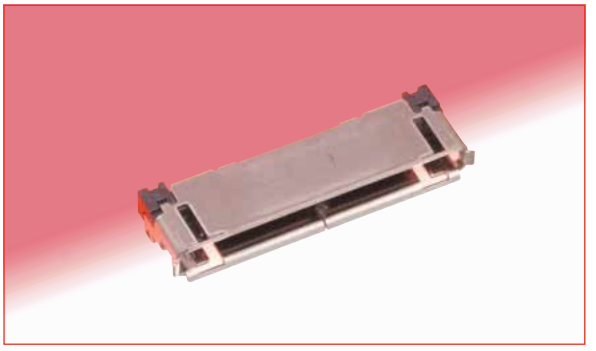


Part Number	CL No.	Packaging	RoHS
ST60-36PR	CL241-0036-0	Reel packaging (1500 pieces/reel)	YES

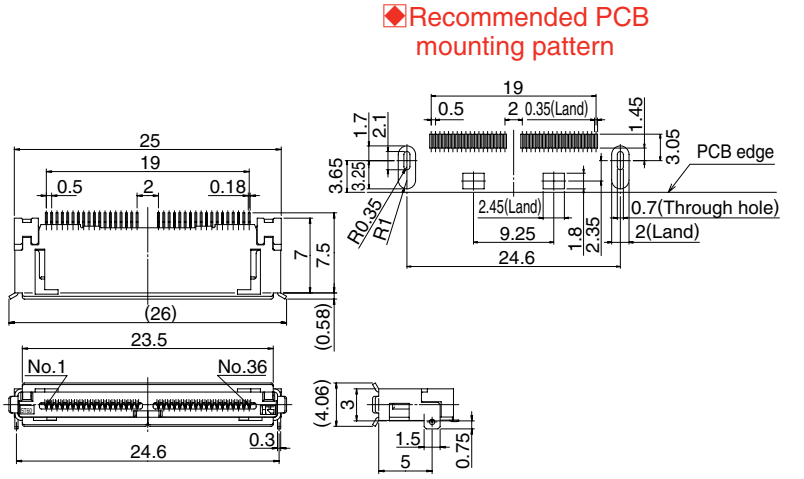


■Plug – cradle type(Horizontal)


● 18 pos.

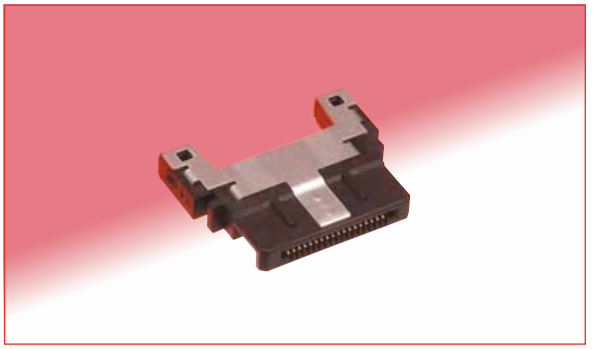


Part Number	CL No.	Packaging	RoHS
ST60X-18S	CL241-0028-1	Reel packaging (900 pieces/reel)	YES

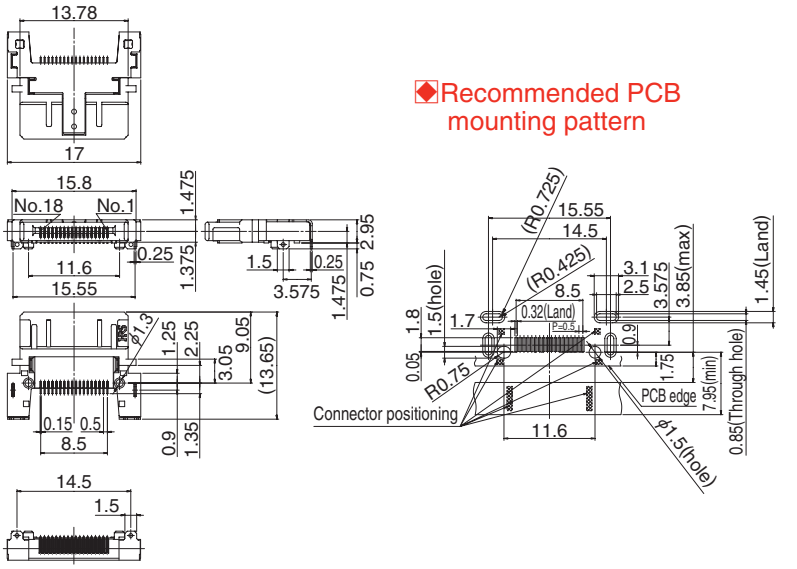

● 36 pos.

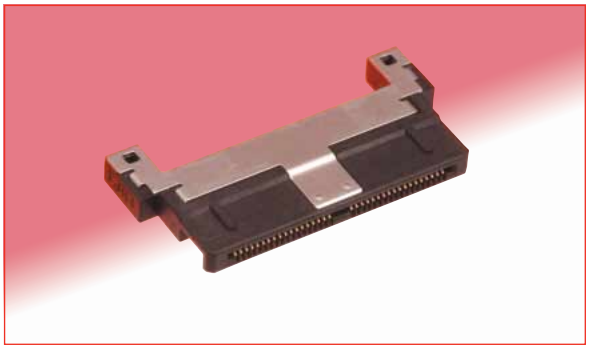


Part Number	CL No.	Packaging	RoHS
ST60X-36S	CL241-0035-7	Reel packaging (900 pieces/reel)	YES

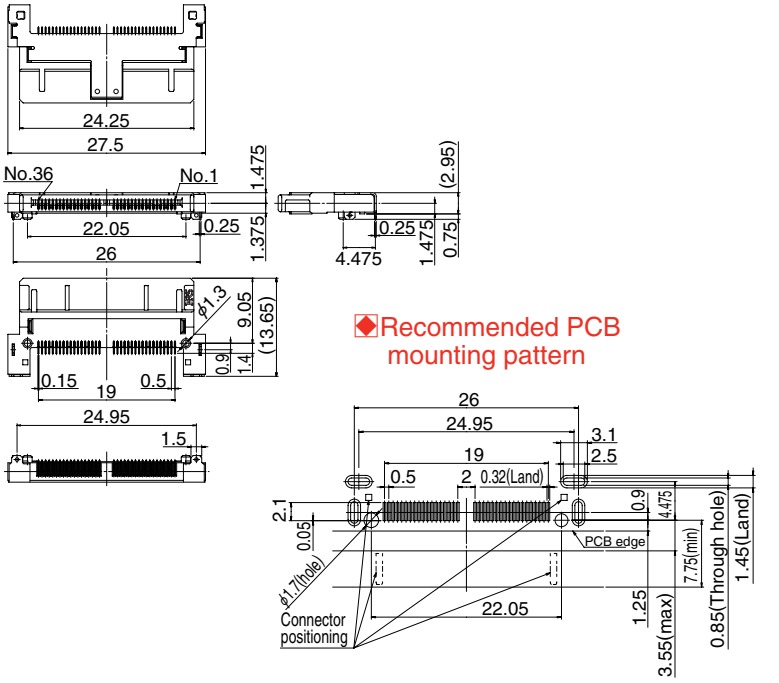


The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at www.hirose-connectors.com, or contact your Hirose sales representative.

■Plug – cradle type(Vertical)


● 10 pos.

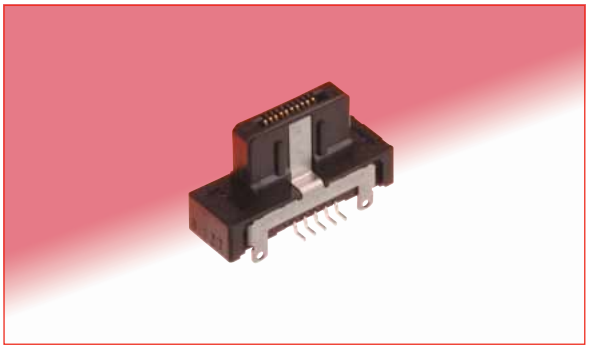


Part Number	CL No.	Packaging	RoHS
ST80X-10S	CL241-0030-3	Reel packaging (400 pieces/reel)	YES

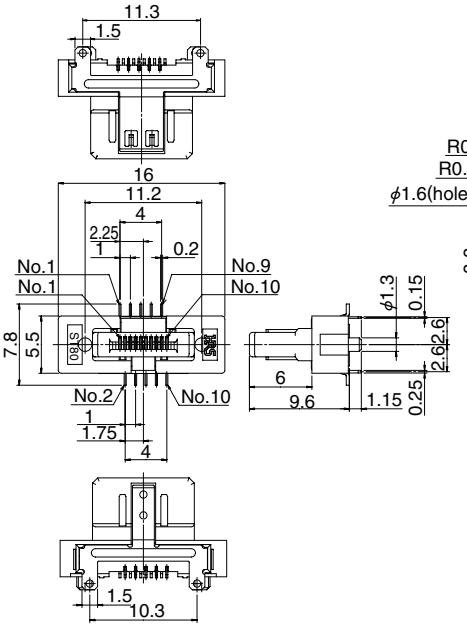


◆Recommended PCB mounting pattern

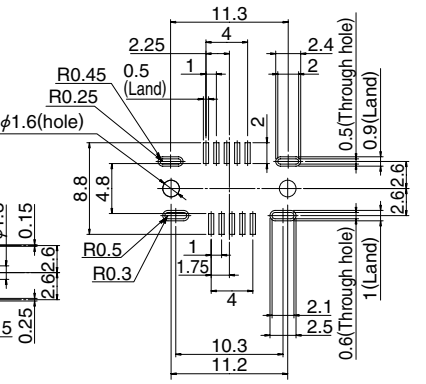


● 18 pos.

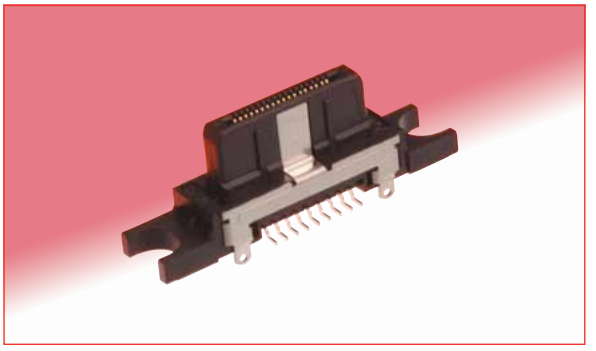


Part Number	CL No.	Packaging	RoHS
ST80X-18S(50)	CL241-0020-0-50	Reel packaging (400 pieces/reel)	YES

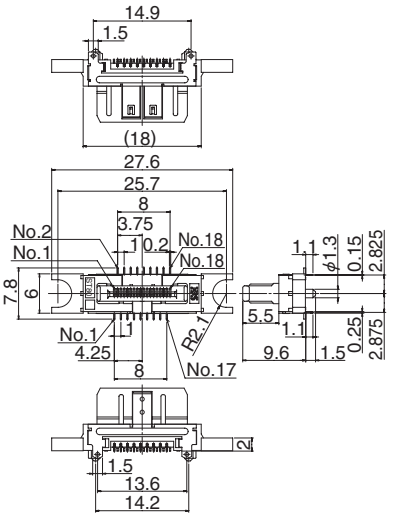


◆Recommended PCB mounting pattern

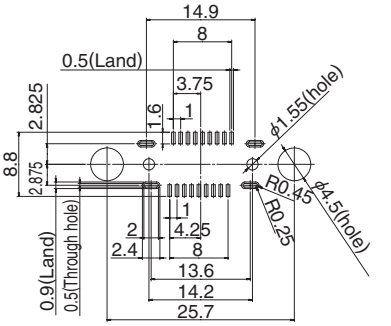


● 24 pos.

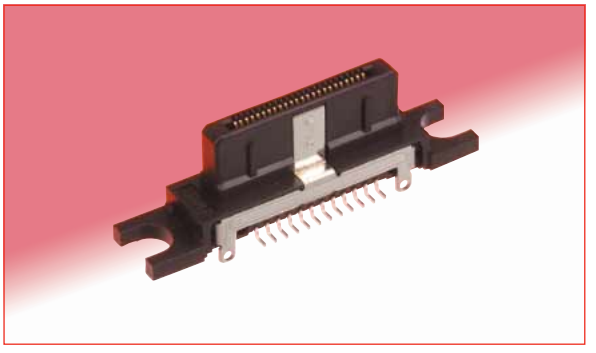

Part Number	CL No.	Packaging	RoHS
ST80X-24S(50)	CL241-0037-2-50	Reel packaging (400 pieces/reel)	YES

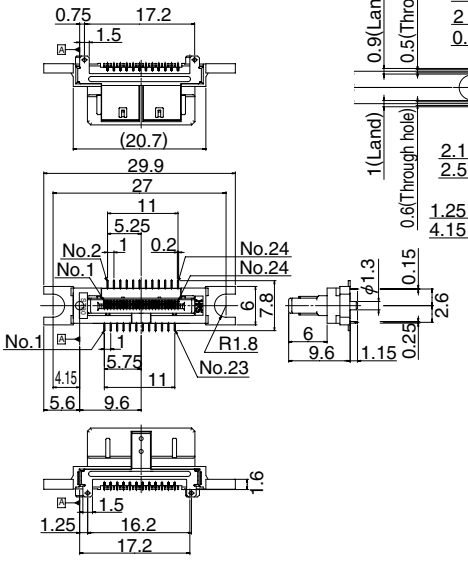

◆Recommended PCB mounting pattern

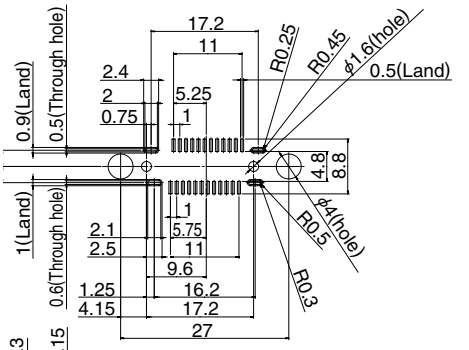


■Plug

● 10 pos. (Non-shielded type, for 4mm max. cable diameter)




Part Number	CL No.	RoHS
ST40-10S-CV(80)	CL241-0021-2-80	YES

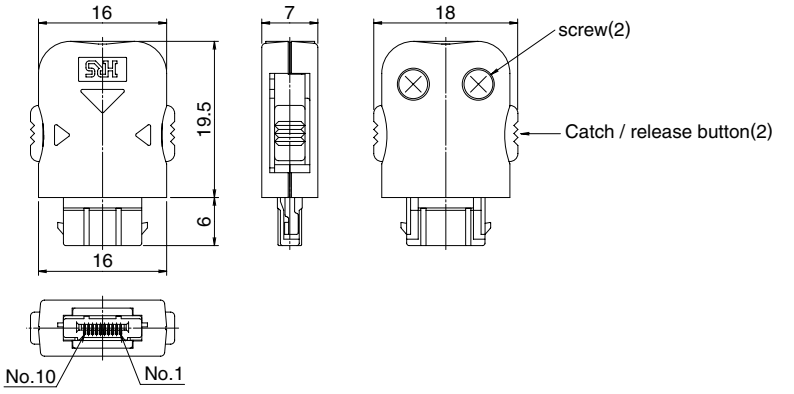


● 10 pos. (Reverse, non-shielded type, for 4mm max. cable diameter)




Part Number	CL No.	RoHS
ST40-10S-CVR(80)	CL241-0040-7-80	YES

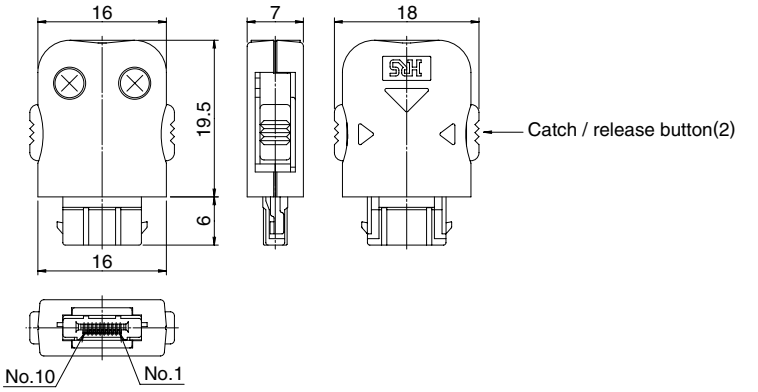

● 10 pos. (Shielded type, for 4mm max. cable diameter)

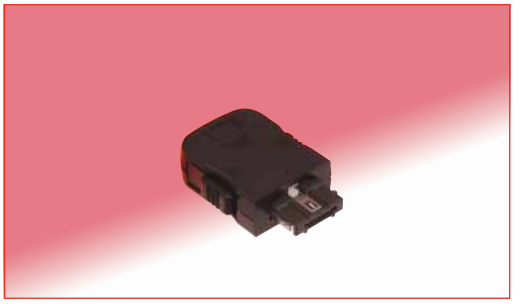


Part Number	CL No.	RoHS
ST40X-10S-CV(80)	CL241-0041-0-80	YES

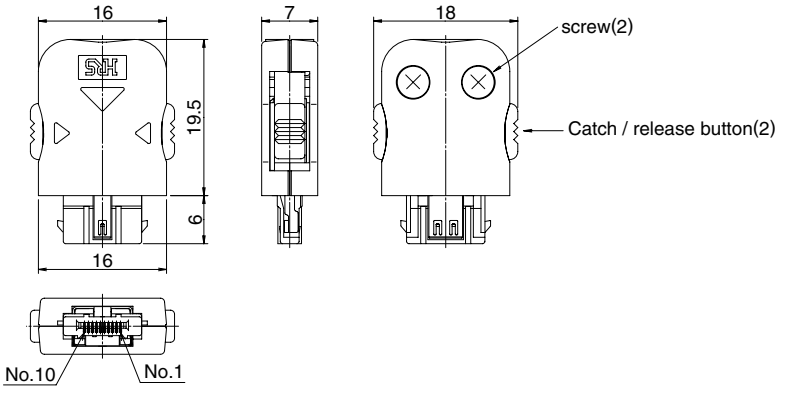

● 10 pos. (Reverse, shielded type, for 4mm max. cable diameter)



Part Number	CL No.	RoHS
ST40X-10S-CVR(80)	CL241-0029-4-80	YES

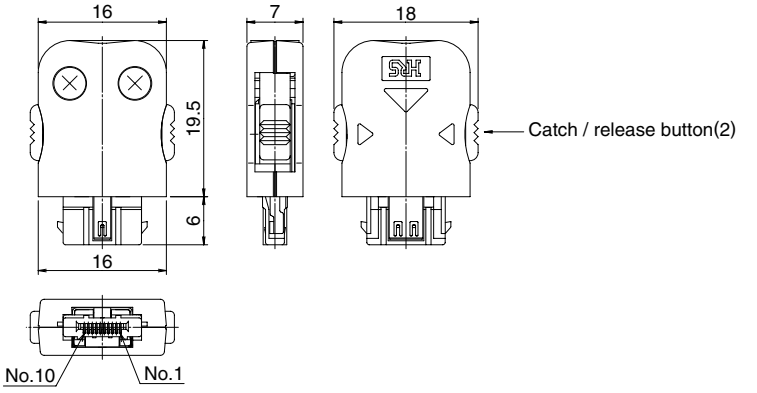


The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at www.hirose-connectors.com, or contact your Hirose sales representative.

● 18 pos. (Shielded type, for 4mm max. cable diameter)




Part Number	CL No.	RoHS
ST40X-18S-CV(80)	CL241-0012-1-80	YES

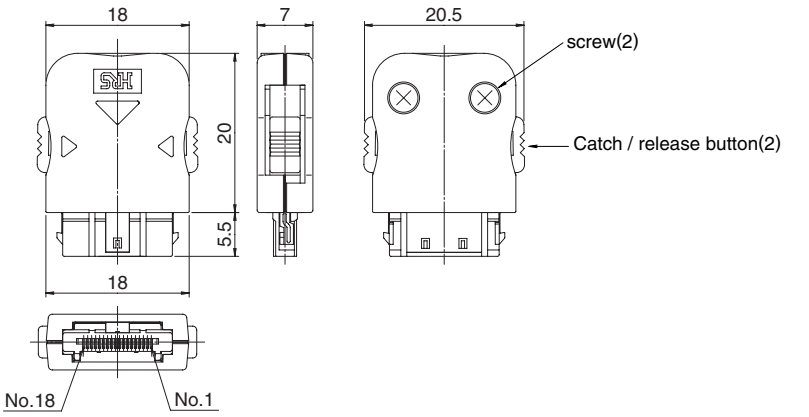

● 18 pos. (Reverse, shielded type, for 4mm max. cable diameter)




Part Number	CL No.	RoHS
ST40X-18S-CVR(80)	CL241-0016-2-80	YES

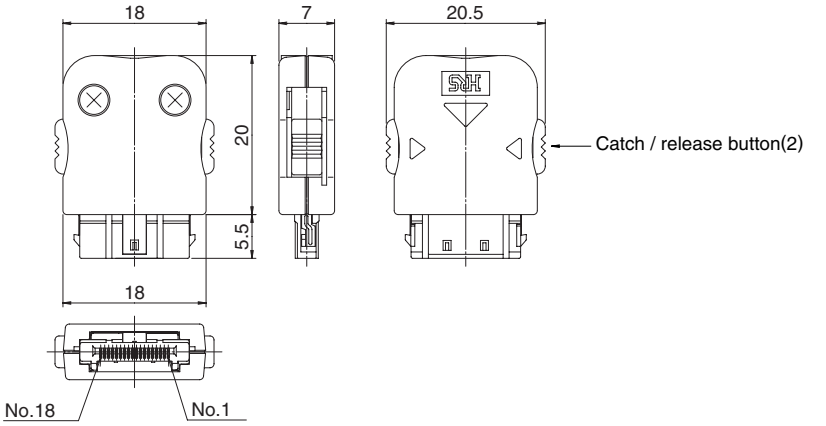

● 4 pos. (For opening size as 18 pos., reverse, non-shielded, for 4mm max. cable diameter)




Part Number	CL No.	RoHS
ST40-18(4)S-CVR(80)	CL241-0032-9-80	YES

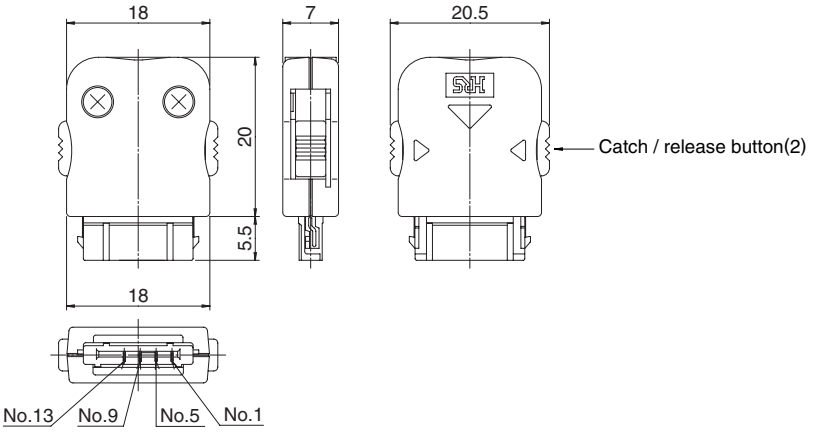

● 24 pos. (Shielded type, for 4mm max. cable diameter)



Part Number	CL No.	RoHS
ST40X-24S-CV(80)	CL241-0004-3-80	YES

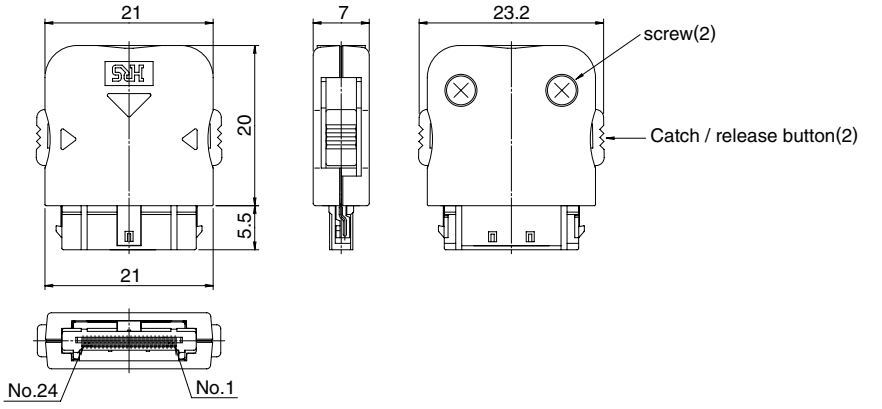


The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at www.hirose-connectors.com, or contact your Hirose sales representative.

● 24 pos. (Shielded type, for 5.8mm max. cable diameter)




Part Number	CL No.	RoHS
ST40X-24S-CV1(80)	CL241-0023-8-80	YES

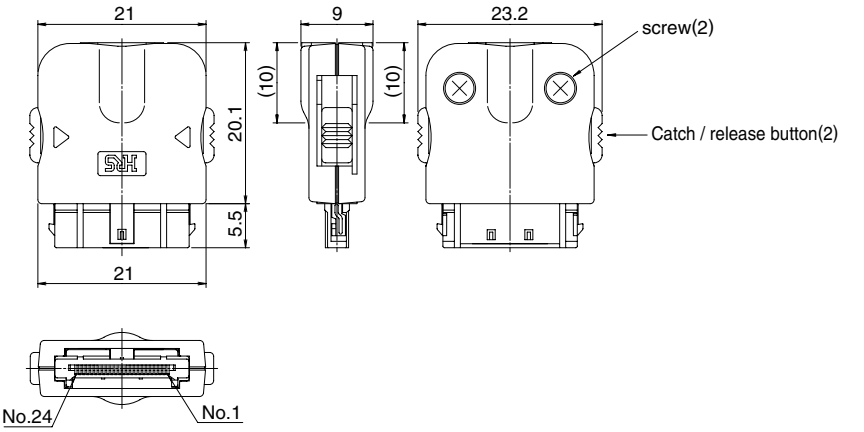

● 36 pos. (Shielded type, for 7mm max. cable diameter)



Part Number	CL No.	RoHS
ST40X-36S-CV(80)	CL241-0034-4-80	YES

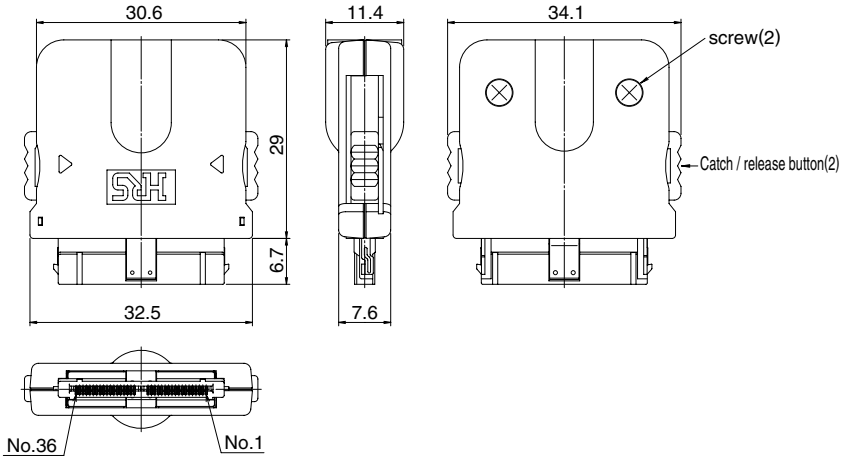


Note: Plug assemblies will require additional components. Contact Hirose Electric representative for detailed descriptions and installation instructions.


The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at www.hirose-connectors.com, or contact your Hirose sales representative.

Packaging Specification

● Embossed Carrier Tape Dimensions

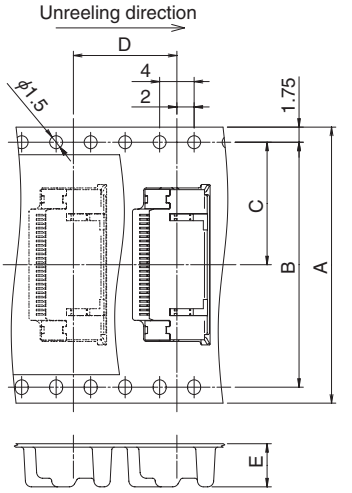

● Reel Dimensions

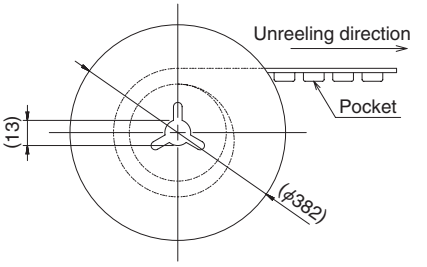


● Reel Dimensions

Part Number	A	B	C	D	E	pcs. / reel
ST60-10P	24	—	11.5	12	5	1500
ST60-18P(50)	24	—	11.5	12	5	1500
ST60-24P(50)	32	28.4	14.2	12	5	1500
ST60-36P	44	40.4	20.2	12	5	1500
ST60-18P/4(50)	44	40.4	20.2	12	6.2	1000
ST60-36PR	44	40.4	20.2	12	5	1500
ST80X-10S	24	—	11.5	16	12.2	400
ST80X-18S(50)	44	40.4	20.2	16	12.7	400
ST80X-24S(50)	44	40.4	20.2	16	12.7	400
ST60X-18S	32	28.4	14.2	20	4.95	900
ST60X-36S	44	40.4	20.2	20	4.85	900

The product information in this catalog is for reference only. Please request the Engineering Drawing for the most current and accurate design information.
All non-RoHS products have been discontinued, or will be discontinued soon. Please check the products status on the Hirose website RoHS search at www.hirose-connectors.com, or contact your Hirose sales representative.

Recommended Temperature Profile (Lead-free soldering compound)

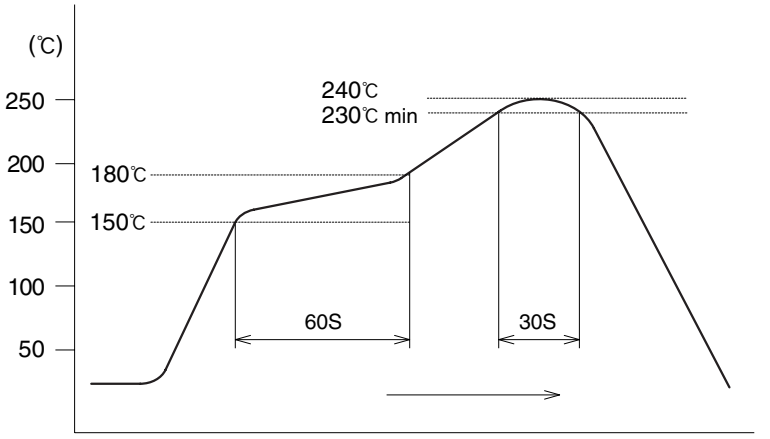

HRS test conditions
Solder composition: Paste, 96.5%Sn/3.0%Ag/0.5%Cu
Test board: Glass epoxy 35mm×35mm×0.8mm thick

The temperature profiles are based on the above conditions. In individual applications the actual temperature may vary, depending on solder paste type, volume/thickness and board size/thickness. Consult your solder paste and equipment manufacturer for specific recommendations.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hirose Electric:

ST60-24P(50) ST40X-24S-CV(80) ST60-18P(50) ST40X-18S-CV(80) ST40X-CM(4.0) ST40X-18S-CVR(80) ST80X-18S(50) ST40-10S-CV(80) ST60-10P ST40X-24S-CV1(80) ST40X-CM(5.8) ST40X-BS(5.8) ST60X-18S ST40X-10S-CVR(80) ST80X-10S ST60-36P ST40X-36S-CV(80) ST60X-36S ST60-36PR ST80X-24S(50) ST40-10S-CVR(80) ST40X-10S-CV(80) ST40X-CM(6.8) ST40X-BS(4.0) ST40X-CM(4.0-5.0) ST40X-18S-CV1 ST40X-CM1(6.8) ST40X-BS1(6.8) ST40X-24S-CV(81) ST40X-CM(5.8)/CK-MP(61) ST40X-CM(5.8)/CK-MP ST40X-CM(5.8)/CK-MP(62) ST40X-CM(5.8)/CK-MP(01) ST40X-CM(40-50)/CK-MP(01) ST40X-CM(40-50)/CK-MP ST40X-CM(40-50)/CK-MP(62) ST40X-CM(40-50)/CK-MP(61) ST60-24P(51)