SOLID STATE OPTRONICS

STS100



Multifunction
Telecommunications Switch

DESCRIPTION

The STS100 combines two 1 Form A solid state relays and one optocoupler in a 16-pin SOIC package. Its small outline and low height make it ideal for use in PCMCIA applications where multi-function devices help reduce cost and board space.

FEATURES

- Low input control current
- Function integration
- 35 ohms max on-resistance
- 120mA max continuous load current

APPLICATIONS

- Telecom switching
- PCMCIA cards
- Fax/modem modules
- Set-top boxes
- DAA arrangements
- Hookswitch
- Loop current detect
- Pulse dialing

OPTIONS/SUFFIXES

- -TR Tape and Reel

SCHEMATIC DIAGRAM

MAXIMUM RATINGS

PARAMETER	UNIT	MIN	TYP	MAX
Storage Temperature	°C	-55		120
Operating Temperature	°C	-40		85
Continuous Input Current	mA			40
Transient Input Current	mA			400
Reverse Input Control Voltage	V	6		
Output Power Dissipation	mW			500

APPROVALS

- BABT CERTIFICATE # 605963

Solid State Optronics, Inc.
1.888.377.4776
www.ssousa.com



Multifunction
Telecommunications Switch

ELECTRICAL CHARACTERISTICS - 25°


PARAMETER	UNIT	MIN	TYP	MAX	TEST CONDITIONS
RELAY INPUT SPECIFICATIONS					
LED Forward Voltage	V		1.2	1.5	If = 10mA
LED Reverse Voltage	V	6	12		Ir = 10uA
Turn-On Current	m A	10	5		Io = 120mA
Turn-Off Current	m A		0.5		
RELAY OUTPUT SPECIFICATIONS					
Blocking Voltage	V	400			Io = 10uA
Continuous Load Current	m A			120	If = 10mA
On-Resistance	Ω		25	35	If = 10mA, Io = 120mA
Leakage Current	μ A		0.7	10	Vo = 400V
Output Capacitance	p F		25	50	Vo = 25V, f = 1.0MHz
Offset Voltage	m V			0.2	If = 10mA
Turn-On Time	m s		2	5	If = 10mA, Io = 120mA
Turn-Off Time	m s		0.5	1	If = 10mA, Io = 120mA
PHOTOTRANSISTOR INPUT SPECIFICATIONS					
LED Forward Voltage	V		1.2	1.5	If = 10mA
Turn-On Current	m A	2			Io = 0.5mA
PHOTOTRANSISTOR OUTPUT SPECIFICATIONS					
Breakdown Voltage	V	60			Io = 10uA
Leakage Current	n A			500	Vce = 20V
Collector-Emitter Capacitance	p F		6		Vce = 0V, f = 1.0kHz
Saturation Voltage	V			0.5	If = 5mA
Current Transfer Ratio	%	30	100	800	If = 2mA, Vce = 5V
COUPLED SPECIFICATIONS					
Isolation Voltage	V	1500			T = 1 minute
-H Suffix	V	2500			T = 1 minute
Isolation Resistance	G Ω	100			
Coupled Capacitance	p F			2	
Contact Transient Ratio	V / μ s	2000	7000		dV = 50V


Solid State Optronics, Inc.
1.888.377.4776
www.ssousa.com





Multifunction
Telecommunications Switch


PERFORMANCE DATA

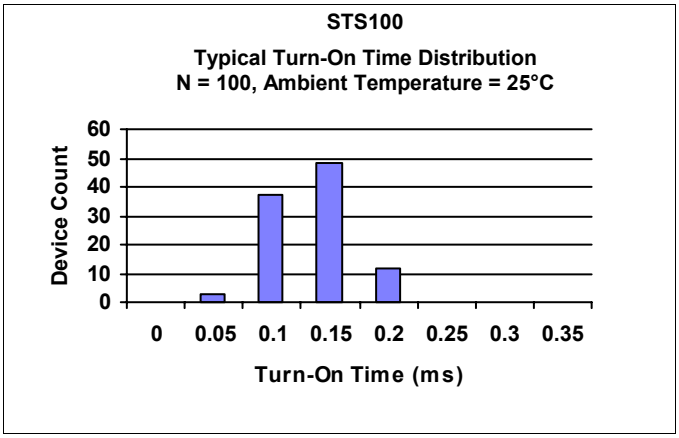


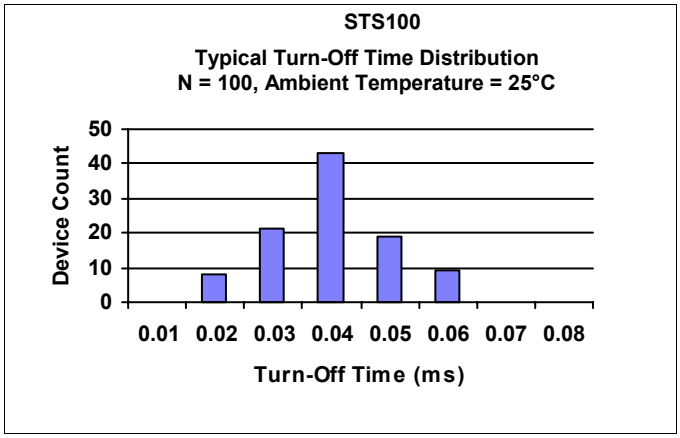

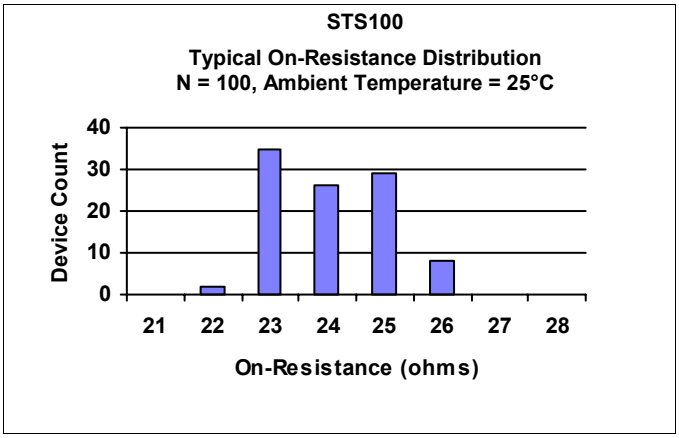

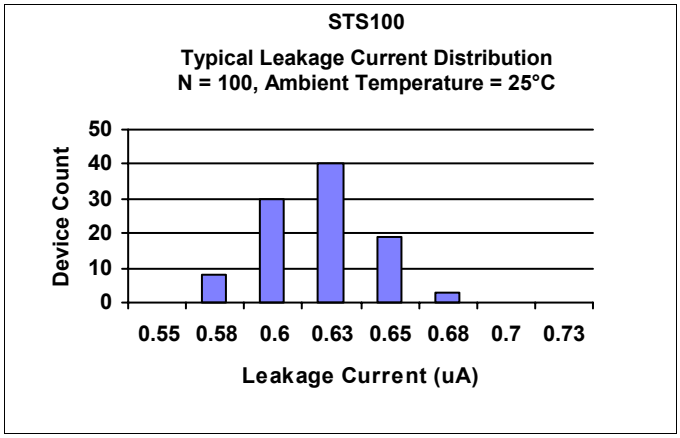

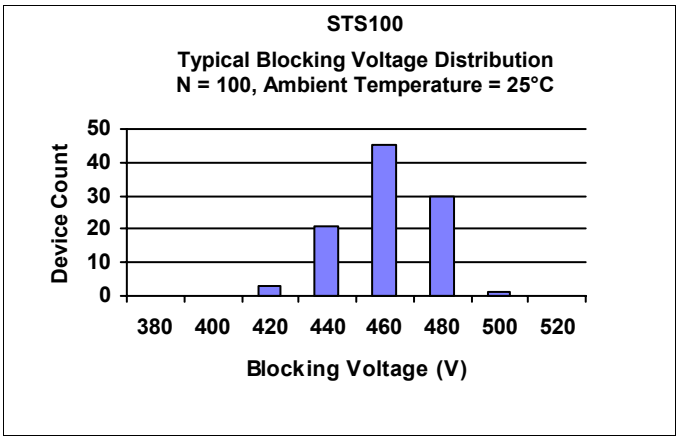

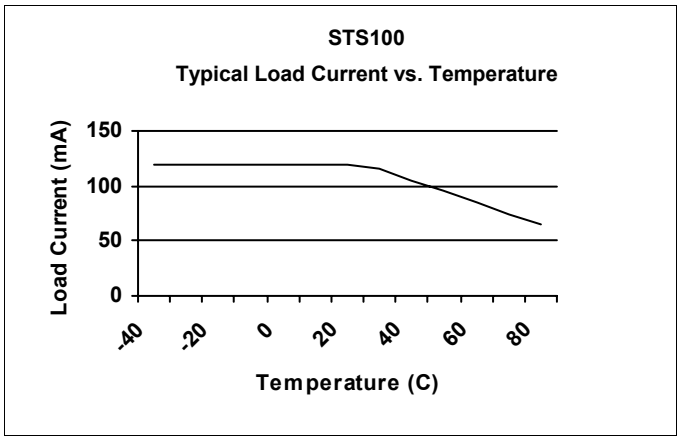


Solid State Optronics, Inc.
1.888.377.4776
www.ssousa.com




Multifunction
Telecommunications Switch

MECHANICAL DIMENSIONS


16 PIN SMALL OUTLINE INTEGRATED CIRCUIT

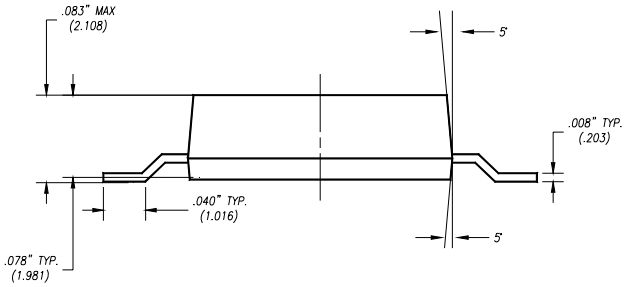

END VIEW

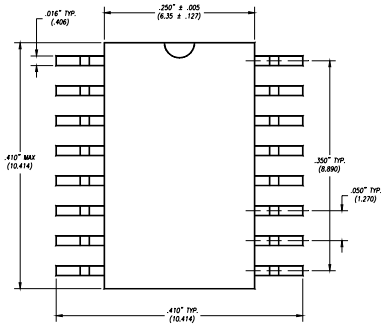

TOP VIEW

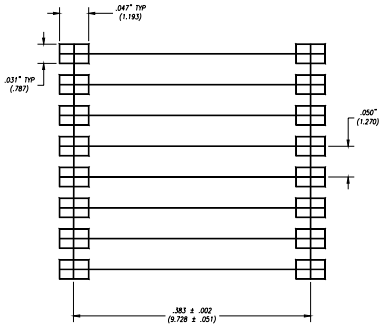

BOTTOM VIEW/
BOARD PATTERN

Solid State Optronics, Inc.
1.888.377.4776
www.ssousa.com