
SW1226(12V2.6AH)




Outer dimensions (mm)

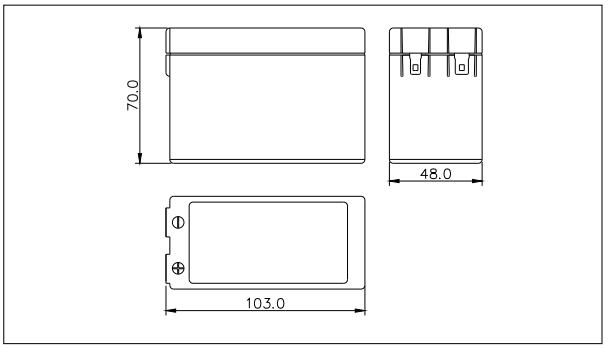

Specifications

Nominal Voltage		12V
Rated capacity (20hour rate)		2.6 Ah
Dimensions	Total Height	70 mm (2.76inches)
	Height	70 mm (2.76 inches)
	Length	103 mm (4.1inches)
	Width	48 mm (1.89 inches)
Weight Approx		0.95Kg (2.09lbs)


Terminal Type (mm)

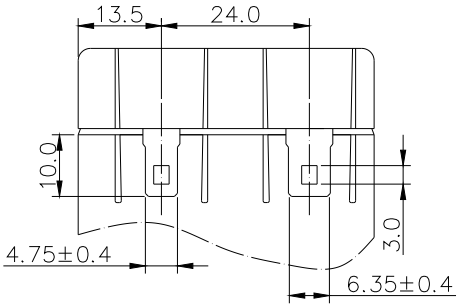

Characteristics

Capacity 25℃(77℉)	20 hour rate(0.13A) 10 hour rate(0.24A) 5 hour rate(0.44A) 1 hour rate(1.56A)	2.60 AH 2.4 AH 2.21 AH 1.56 AH
	1.5 hour discharge to 10.5V	1.12 A
Internal Resistance	Full charged Battery at 25℃(77℉)	27 mΩ
Capacity affected by Temperature (20hour rate)	40℃(104℉) 25℃(77℉) 0℃(32℉) -15℃(5℉)	102% 100% 85% 65%
Self-Discharge at 25℃(77℉)	Capacity after 3 month storage Capacity after 6 month storage Capacity after 12 month storage	91% 82% 64%
Terminal	T 24	
Charge (constant Voltage) Cycle	Initial Charging Current less than 0.92A Voltage 14.40-14.70V	
Charge (constant Voltage) Float	Voltage 13.50-13.80V	

Discharge Curves 25℃(77℉)

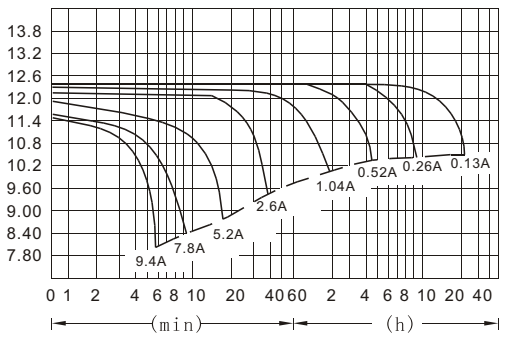

Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25℃(77℉)

Time		5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	9.4	6.14	4.55	2.99	1.56	0.91	0.67	0.54	0.46	0.30	0.25	0.13
	W	97.2	65.9	48.8	32.2	16.90	9.99	7.45	6.05	5.19	3.46	2.84	1.56
10.20V	A	8.6	5.87	4.18	2.84	1.46	0.87	0.65	0.52	0.45	0.30	0.24	0.13
	W	92.2	65.7	46.8	31.9	16.58	10.06	7.53	6.05	5.21	3.46	2.84	1.54
10.50V	A	7.8	5.49	3.90	2.75	1.42	0.86	0.64	0.49	0.45	0.29	0.24	0.13
	W	85.8	62.4	44.5	31.6	16.36	9.92	7.44	5.79	5.18	3.45	2.83	1.54
10.80V	A	7.5	5.24	3.64	2.68	1.37	0.83	0.63	0.49	0.42	0.28	0.23	0.13
	W	84.2	60.5	41.9	31.0	15.93	9.77	7.41	5.73	4.99	3.38	2.77	1.51
11.10V	A	6.9	4.94	3.38	2.60	1.32	0.81	0.60	0.48	0.40	0.28	0.23	0.12
	W	78.8	57.2	39.3	30.4	15.49	9.61	7.07	5.68	4.82	3.33	2.75	1.50