

GaAs SPST Absorptive Switch with ASIC Driver, DC - 3.0 GHz

V 5.00

SW65-0014


Features

- Typical Isolation: 42 dB (2,000 MHz)
- Typical Insertion Loss: 1.8 dB (2,000 MHz)
- Integral ASIC TTL/CMOS Driver
- Plastic, 50 mil Pitch, SOW-24 Lead, Wide Body
- Low DC Power Consumption
- 50 Ohm Nominal Impedance
- Tape and Reel Packaging Available
- Test Boards Available

Description

M/A-COM's SW65-0014 is a GaAs MMIC absorptive SPST switch with an integral silicon ASIC driver. This device is in a 24-lead plastic package. This switch offers excellent broadband performance and repeatability from DC to 3 GHz, while maintaining low DC power dissipation. The SW65-0014 is ideally suited for wireless infrastructure applications. Also available in ceramic package with improved performance.

SOW-24

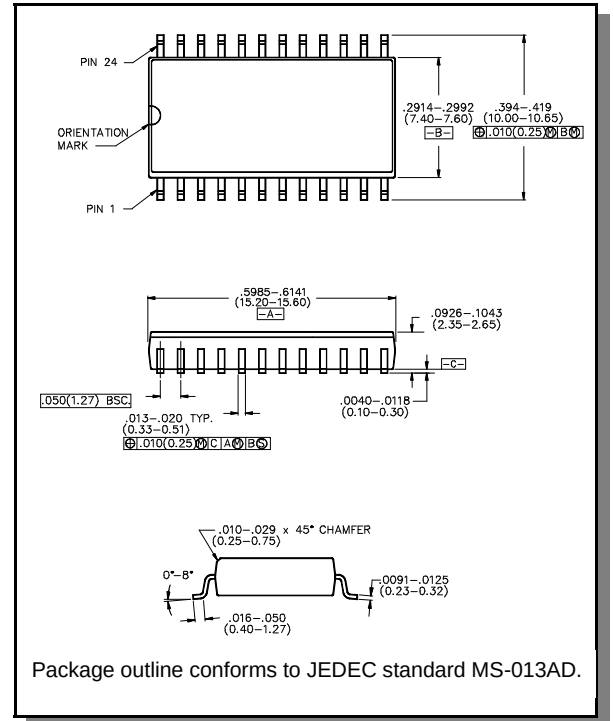

Electrical Specifications: $T_A = 25^\circ\text{C}$

Parameter	Test Conditions	Units	Min	Typical	Max
Insertion Loss	DC - 3.0 GHz	dB	—	1.8	2.2
Isolation (All arms off)	DC - 3.0 GHz	dB	35	42	—
VSWR	DC - 3.0 GHz	—	—	On 1.6:1 Off 2.0:1	2.1:1
T_{rise} T_{fall}	10%/90%, 90%/10% ¹	nS	—	15	50
T_{on} T_{off}	50% TTL to 90%/10% RF	nS	—	50	150
Transients	In-band (peak to peak)	mV	—	50	150
1 dB Compression	.05 GHz .5 - 3.0 GHz	dBm dBm	— —	+20 +27	— —
Input IP ₃	Two tone inputs 0.05 GHz Up to +5 dBm 0.5 - 3.0 GHz	dBm dBm	— —	+35 +46	— —
V _{CC}	—	V	+4.5	+5.0	+5.5
V _{EE}	—	V	-8.0	-5.0	-4.75
I _{CC}	V _{CC} = +5.0V	mA	—	—	4
I _{EE}	V _{EE} = -5.0V	mA	—	—	-1
Logic "0"	I _{in} = 20 μ A max	V	0.0	—	0.8
Logic "1"	I _{in} = 20 μ A max	V	2.0	—	5.0

1. Decoupling capacitors (.01 μ F) are required on the power supply lines.

Absolute Maximum Ratings ^{2,3}

Parameter	Absolute Maximum
Max. Input Power 0.05 GHz 0.5 - 3.0 GHz	+27 dBm +34 dBm
Bias Voltages V_{EE} V_{CC} Control Voltage ⁴	-8.5V +5.5V -0.5V to V_{CC} +0.5V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +125°C

2. Operation of this device above any one of these parameters may cause permanent damage.
3. When the RF input is applied to the terminated port, the absolute maximum power is +30 dBm.
4. Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.

Pin Configuration

Pin #	Function	Pin #	Function
1	RFc	13	C1
2	GND	14	GND
3	GND	15	GND
4	GND	16	GND
5	GND	17	GND
6	GND	18	GND
7	GND	19	RF1
8	V_{EE}	20	GND
9	GND	21	GND
10	V_{CC}	22	GND
11	GND	23	GND
12	GND	24	GND

Truth Table

TTL Control Input	RF Common To:
C1	RF1
1	On
0	Off

Ordering Information

Part Number	Package
SW65-0014	Bulk Packaging
SW65-0014TR	Tape and Reel (1K Reel)
SW65-0014-TB	Units Mounted on Test Board

Specifications subject to change without notice.

- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.