

SYS-4U4000-4F02

3rd Gen Intel® Core™ i7/i5/i3
4U PICMG1.3 System with
12 Expansion Slots



SUSIAccess
Remote Device Management

CE FCC



Features

- Intel® Q77 Platform
 - Intel® Core™ i7/i5/i3 CPU (LGA1155)
 - Dual Channel (Non-ECC) DDR3 1333/1600 up to 16 GB
 - Supports USB3.0, SATA3.0, SW Raid 0, 1, 5, 10
- Expansion Capability
 - 8 PCI, 3 PCIe1, 1 PCIe16
 - Three 5.25" ODD and One 3.5" Shock-resistant Drive Bay
- Thoughtful and Management Design
 - Intelligent remote manageability
 - Smart fan control
 - Lockable front door prevents unauthorized access
 - 300W 80 plus power supply



Remote
Mgmt.



Power
Optimized



Thermal
Optimized




Long Life
Cycle

Specifications

Processor System	CPU	Core i7-3770	Core i5-3550S	Core i3-3220	Pentium G2120	Pentium G850	Celeron G540
	Base Frequency	3.4 GHz	3.0 GHz	3.3 GHz	3.1 GHz	2.9 GHz	2.5 GHz
	L3 Cache	8 MB	6 MB	3 MB	3 MB	3 MB	2 MB
	SKU/Chipset	Intel Q77					
	BIOS	AMI 64Mbit SPI Flash					
Memory	Technology	Dual channel (Non-ECC) DDR3 1333/1600					
	Max. Cap.	16 GB (8 GB per DIMM)					
	Socket	DDR3 240-pin DIMM x 2					
Graphics	Controller	Chipset integrated Intel HD Graphics					
	Video Output	15 Pin VGA D-sub Connector x1/DVI-D connector x1 (Pin Header)					
Expansion Slot	PCI Express x 16	1					
	PCI Express x 1	3					
	PCI	8					
Ethernet	Interface	10/100/1000 Mbps					
	Controller	LAN 1: Intel 82579LM LAN 2: Intel 82583V					
Storage	5.25" HDD Bay	3 Front-accessible					
	3.5" HDD Bay	1 Front-accessible					
Front I/O Interface	USB	2					
	PS/2	1					
Rear I/O Interface	USB	Nine USB2.0 (Pin-header*4+USB Type A*1+ 4 on backplane); Three USB3.0 (Pin-Header*2+Rear*1)					
	Serial	2 x RS-232 Pin-Header					
	Parallel	1 (SPP/EPP/ECP)					
	PS/2	1 (Y cable for mouse and keyboard is included in the package)					
Watchdog Timer	Output	System reset					
	Interval	Programmable 1-255 sec					
Power Supply	Output Rating	300W					
	Input Voltage	100 ~ 240 V _{AC}					
Cooling	Fan	2 (12 cm / 85 CFM each)					
	Air Filter	Yes					
Miscellaneous	LED Indicators	Power, HDD, temperature, fan, and power voltage status					
	Remote Management	Remote monitoring: temperature, fan speed, HD status, voltage Active control: schedule on/off, remote KVM Complete protection: system recovery (Acronis), system protection (McAfee)					
		Rear Panel	One 9-pin D-Sub opening				
Environment		Operating			Non-Operating		
	Temperature	0 ~ 40° C (32 ~ 104° F)			-20 ~ 60° C (-4 ~ 140° F)		
	Humidity	10 ~ 85% @ 40° C, non-condensing			10 ~ 95% @ 40° C, non-condensing		
	Vibration (5 ~ 500 Hz)	1 Grms			2 G		
	Shock	10 G (with 11 ms duration, half sine wave)			30 G		
Physical Characteristics	Dimensions (W x H x D)	482 x 177 x 479 mm (19" x 7" x 18.9")					
	Weight	15.2 kg (33.5 lb)					

Dimensions

Unit: mm [inch]

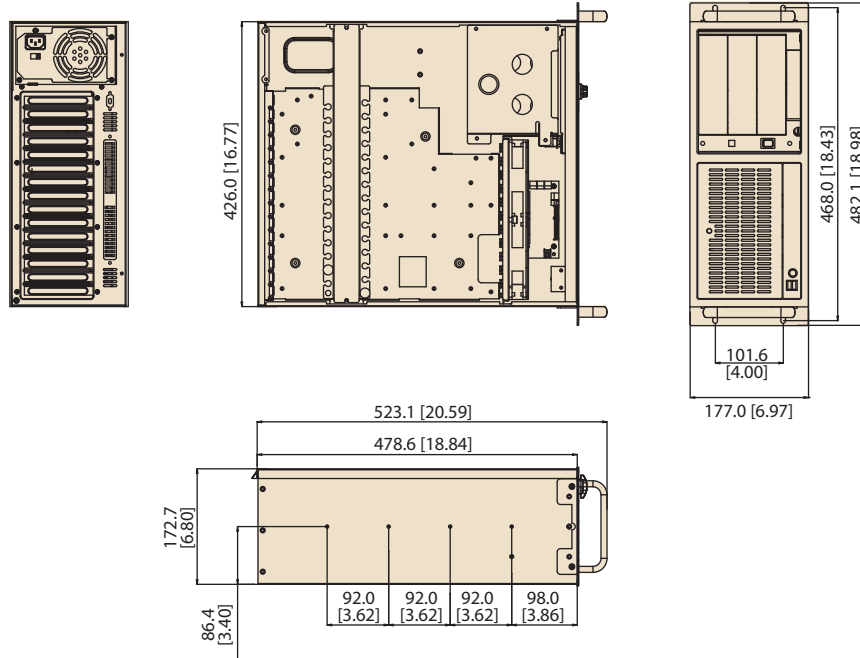

Ordering Information

Please visit Advantech eStore for order entry
<http://buy.advantech.com/>

System Content

Item	P/N
Chassis	ACP-4000BP-00CE
Motherboard	PCE-5127G2-00A1E
Backplanes	PCE-5B13-08A1E
Power Supply	PS8-300ATX-ZBE (ATX, PFC)

Front View

