
T-1169


PARAMETER		UNITS
Primary Impedance Secondary Impedance	600 600	Ω
Longitudinal Balance 300 - 3400 Hz	60dB min.	
Primary DC Resistance	8.5	Ω Max.
Secondary DC Resistance	10.5	Ω Max.
Frequency Response 150Hz - 10kHz	±25	dB
Insertion Loss	1.0 Max @ 1kHz	dB
Isolation (HI-POT)	500	V_{RMS}
Primary DC	None	
Return Loss	20dB min @ 1kHz	dB

PIN POSITION GRID 0.100 (2.54)


● HOLES FOR BOBBIN PINS ○ CLIP SET TERMINATIONS

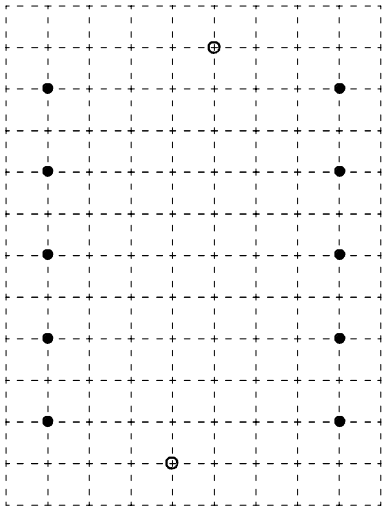


Physical Dimensions in inches (mm)

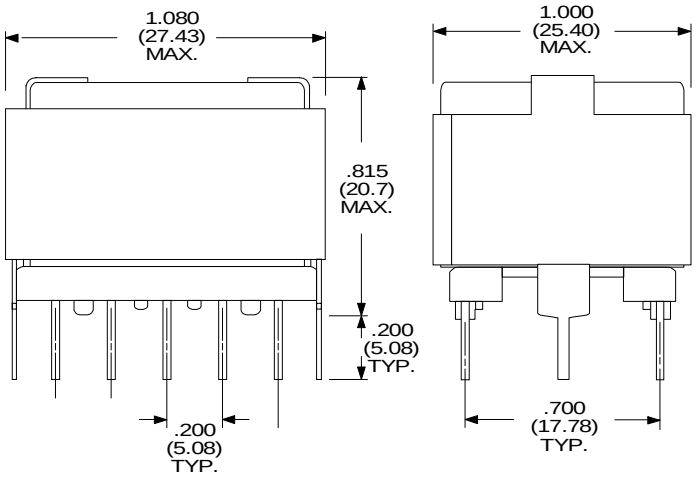

SCHEMATIC DIAGRAM

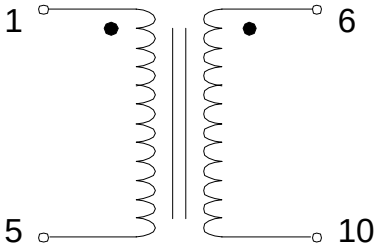



Pin Diameter is 0.026 (0.66)

RHOMBUS INDUSTRIES INC.
FSCM NO. 16714

RHOMBUS P/N: **T-1169**	
CUST P/N:	NAME:
DATE: **12/18/98**	SHEET: 1 OF 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com