CURRENT TRANSFORMER


Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Units
Inductance * Pins 4-6	7.68	10.98	14.27	mH
DCR (4-6)		130		mΩ
DCR (1-8)		1.1		mΩ
Isolation	3000			VAC


* Tested at 100 mV, 1 kHz


Turns Ratio = 50 : 1

Schematic Diagram



Dimensions inches (mm)

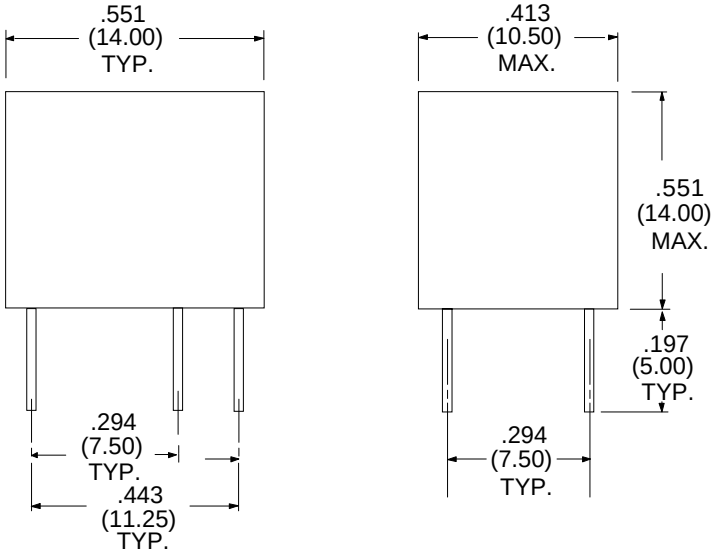



Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

RHOMBUS P/N: T-1171	
CUST P/N:	NAME:
DATE: 9/12/98	SHEET: 1 OF 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com