

WIDE BAND TRANSFORMER

Turns Ratio ($\pm 2\%$)				1 : 2
PARAMETER	MIN.	TYP.	MAX.	UNITS
Inductance Primary		400		μH
Leakage Inductance		150	300	nH
DC Resistance Primary		0.4		ohms
DC Resistance Secondary		0.7		ohms
Interwinding Capacitance		20		pF
ET	8.0			$\text{V}\mu\text{S}$
Hi-pot	500			V_{rms}

QUAD STYLE
(4 Transformers per Package)


Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 19 pieces per tube


*SMD versions
available on
Tape & Reel*

Impedance: $>600\ \Omega$ 3 to 10 MHz

Physical Dimensions inches (mm)

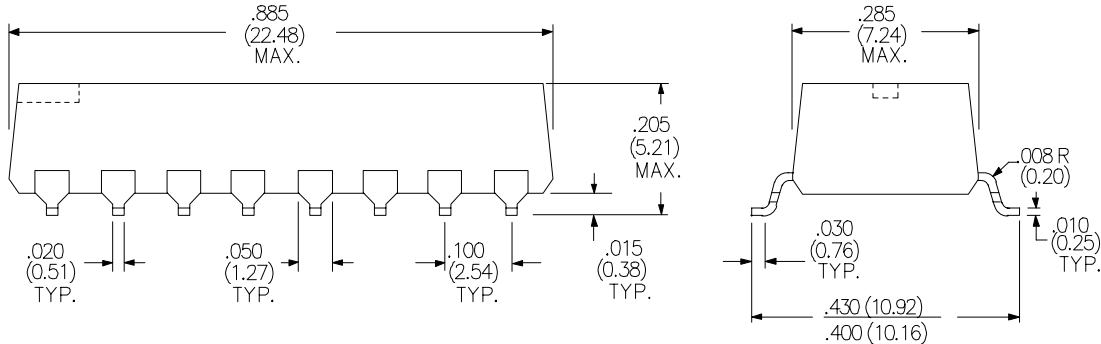

Schematic Diagram

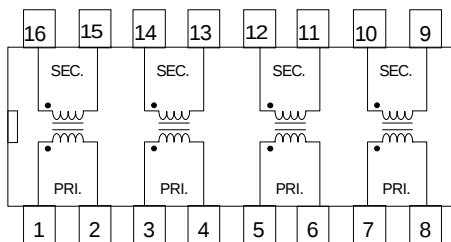

RHOMBUS P/N: T-1200-4G

CUST P/N:

NAME:

DATE: 11/10/99

SHEET: 1 of 1