
AF Transformer

Turns Ratio (± 2 %) (1)	1 : 1


PARAMETER	MIN.	MAX.	UNITS
Inductance (2) Pins 2-6	222	255	µH
Inductance (2) Pins 2-3 (Pin 6-5, Shorted)	890	895	µH
DC Resistance Pins 2-6 or 5-3		0.70	ohms
Isolation (Hi-Pot) Winding to Winding & Winding to Core	500		V_{RMS}


1. Tested at 100 KHz & 100 mV
2. Tested at 10 KHz & 100 mV

Schematic Diagram

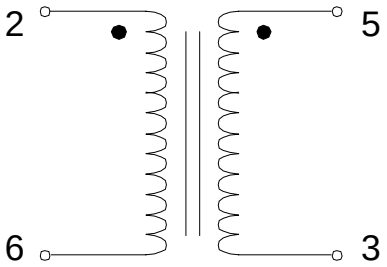

Physical Dimensions
inches (mm)

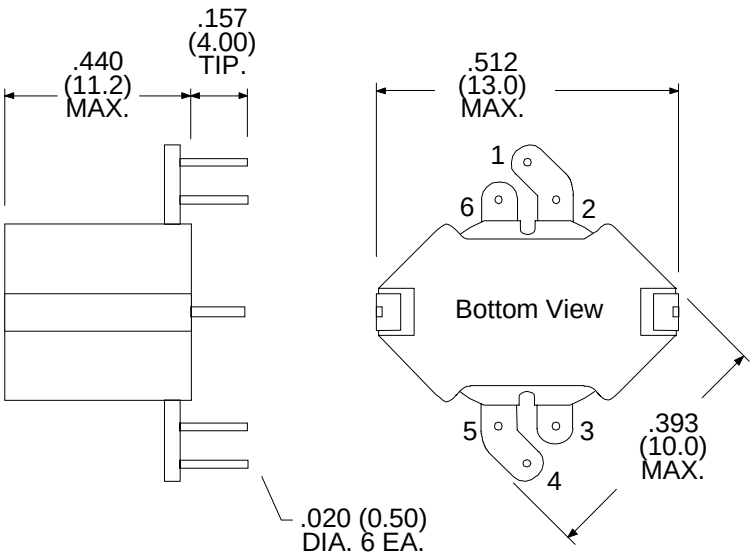

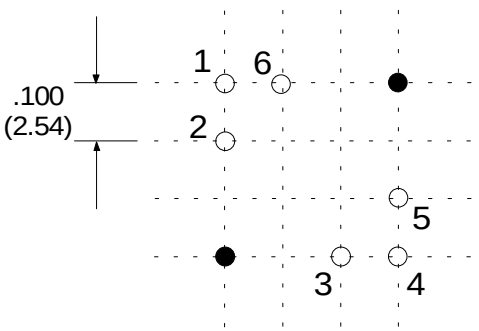

RHOMBUS P/N: T-1234	
CUST P/N:	NAME:
DATE: 4/19/99	SHEET: 1 of 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com