

Turns Ratio ±1%	1 : 1.50 : 0.50 : 1.20 : 1.20 (1-2) : (4-5) : (7-6) : (9-8) : (10-9)			
Parameter	Min.	Typ.	Max.	Units
Inductance Pins (1-2)		6.15		µH
DC Resistance Pins 1-2		16.0		mΩ
DC Resistance Pins 4-5		700		mΩ
DC Resistance Pins 7-6		47		mΩ
DC Resistance Pins 9-8		101		mΩ
DC Resistance Pins 10-9		105		mΩ


Schematic Diagram



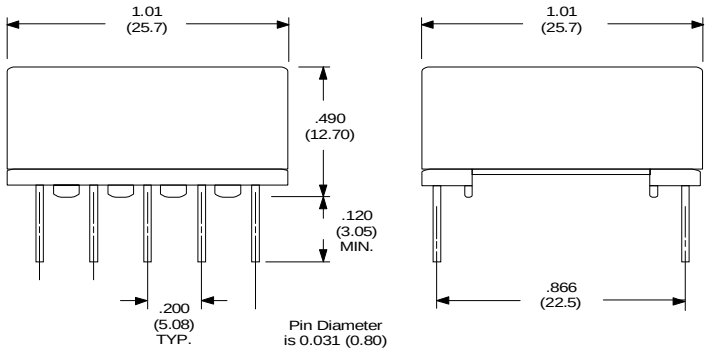

Materials used in construction of this component meet or exceed UL Class B and can be operated up to 130°C

Bottom View



Pin #3 removed

Dimensions in Inches (mm)

RHOMBUS P/N: T-1397	
CUST P/N:	NAME:
DATE: 8/7/01	SHEET:

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com