

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Electrical Specifications @ 25°C

Turns Ratio ($\pm 5\%$)

1 : 2.3CT & 1CT : 1CT

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.



Parts shipped in anti-static tubes. 33 pieces per tube

Tape & Reel Available


PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.8 & 0.8	μ H
Capacitance ($C_{w/w}$)		50	pF
Primary DC Resistance		0.8	ohms
Secondary DC Resistance		1.8/0.8	ohms
ET Product	10		V μ S

Primary Pins 14-16 & 6-8
Isolation 2000 V_{RMS} Min.

PHYSICAL DIMENSIONS inches (mm)

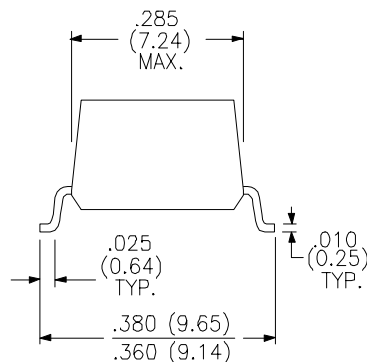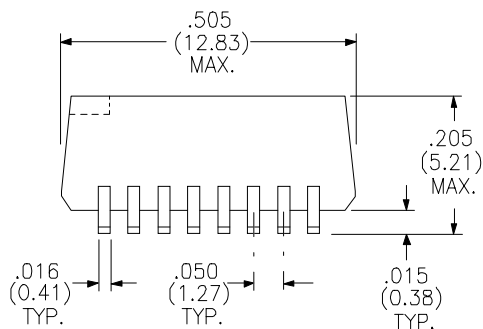

SCHEMATIC DIAGRAM:

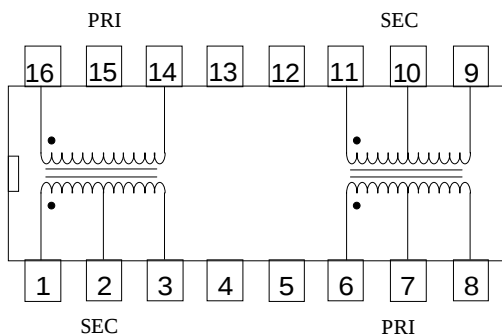

Rhombus P/N: **T-14189**

Cust. P/N:

Name:

Date: **5/16/01**

Sheet: **1 OF 1**