Low Profile PC Power Transformer

PARAMETER		UNITS
Power Rating	50	VA
Secondary Ratings **Parallel Connected** 1-3 & 2-4 / 5-7 & 6-8 (Input 120V Primary 60 Hz)	12 ± 5% 434	V mA
DCR Primary (pins 1-2 or 3-4)	9.3 Typ.	Ω
DCR Secondary (pins 5-6 or 7-8)	0.03 Typ.	Ω
Isolation 1,2,3,4 to 5,6,7,8	1500 min.	V_{RMS}

Temperature Rating: 130°C

Schematic Diagram

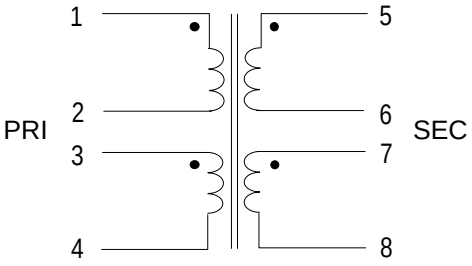

SEE BOTTOM VIEW FOR PIN OUT

Parallel External Connections:
1-3, 2-4 & 5-7, 6-8

Manufactured with UL Listed materials.

Physical Dimensions
inches (mm)

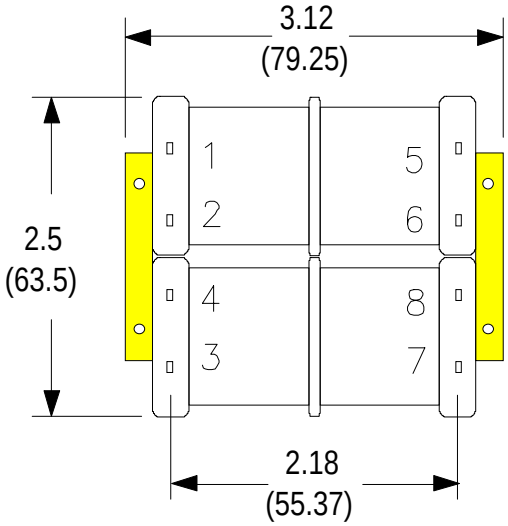

Bottom View

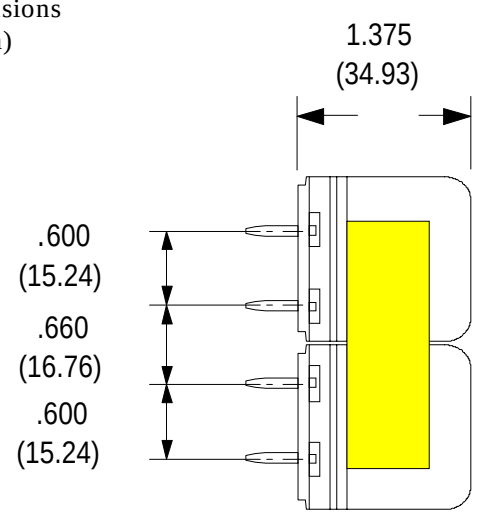

Side View

T-60373

7/14/97

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane,
Huntington Beach, CA 92649-1595
Phone: (714) 898-0960 • FAX: (714) 896-0971

www.rhombus-ind.com