
PARAMETER		UNITS
Frequency Response: @ 100 MHz to 500 MHz	Typ.	dB
Insertion Loss @ 300 MHz	0.7	dB
Power	0.3 Nom.	Watt
Peak Power	0.6 Max.	Watt

Surface Mount Balun Transformer

Schematic Diagram

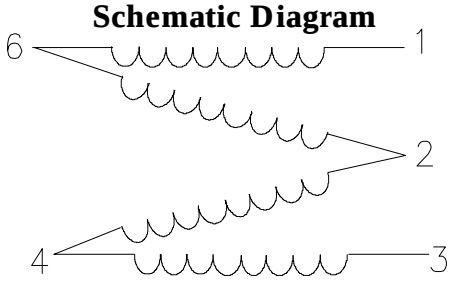



1 : 5 : 5 : 1

(1-6, 6-2, 2-4, 4-3)

Physical Dimensions inches (mm)

TOP VIEW

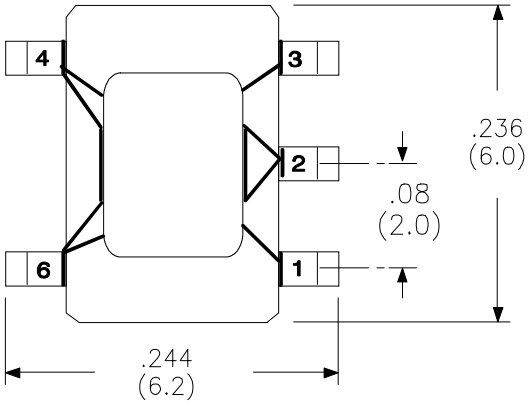

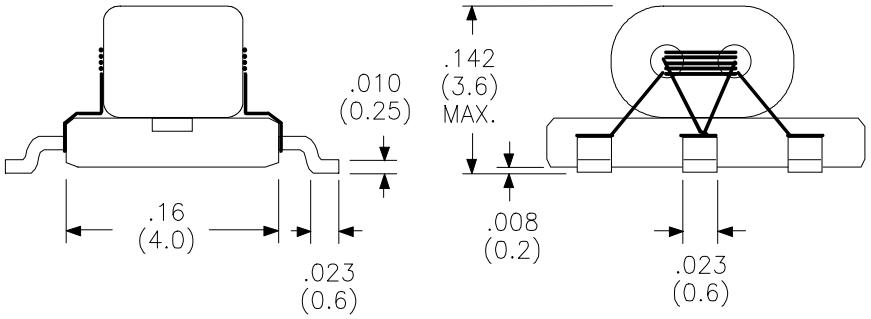

Rhombus P/N: **T-908**	
Cust. P/N:	Name:
Date: **5/27/97**	Sheet: 1 of 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane,
Huntington Beach, CA 92649-1595
Phone: (714) 898-0960 • FAX: (714) 896-0971

www.rhombus-ind.com