




COMMODORE CLASS - CHASSIS MOUNT WITH QUICK-CONNECT TERMINALS POWER TRANSFORMER

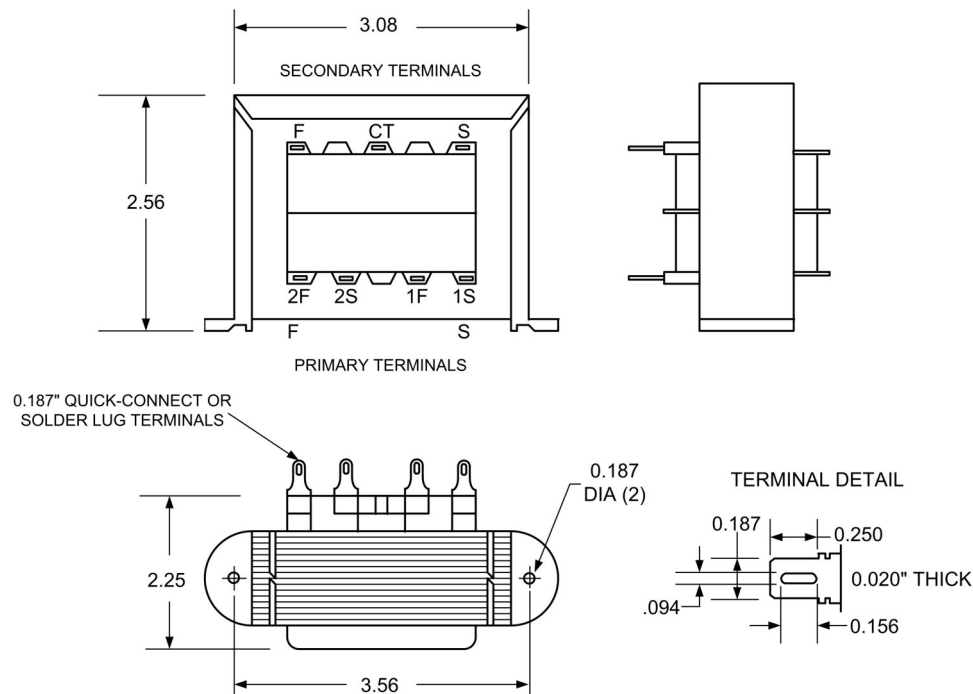

Primary Schematics



Secondary Schematics



- 1. Electrical Specifications
 - A. Maximum Power: 100VA
 - B. Input Voltage and Frequency: 115V, 115/230V or 230V 50/60Hz
 - C. Voltage Regulation: 8% TYP @ full load to no load
 - D. Temperature Rise: 45°C TYP
 - E. Insulation Resistance: < 1 MEG ohm
 - F. Hi-Pot: 2500Vrms 1 minute @ Pri to Sec
2500Vrms 1 minute @ Pri to Core
1500Vrms 1 minute @ Sec to Core
- 2. Marking: Ensign Corp, part number (see table), date code, country, terminal numbers
- 3. Safety:
 - UL/cUL 5085-2 Recognized (File 47299)
 - UL 1446 Recognized Insulation System (File 95662)



Part Number			
115V	115/230V	230V	Secondary
T100-1-510X	T100-2-510X	T100-3-510X	10VCT @ 10A
T100-1-512X	T100-2-512X	T100-3-512X	12.6VCT @ 8.0A
T100-1-516X	T100-2-516X	T100-3-516X	16VCT @ 6.25A
T100-1-520X	T100-2-520X	T100-3-520X	20VCT @ 5.0A
T100-1-524X	T100-2-524X	T100-3-524X	24VCT @ 4.0A
T100-1-528X	T100-2-528X	T100-3-528X	28VCT @ 3.6A
T100-1-536X	T100-2-536X	T100-3-536X	36VCT @ 2.8A
T100-1-548X	T100-2-548X	T100-3-548X	48VCT @ 2.0A
T100-1-556X	T100-2-556X	T100-3-556X	56VCT @ 1.8A
T100-1-620X	T100-2-620X	T100-3-620X	120VCT @ 850mA

 THE FLAGSHIP OF CUSTOM MAGNETICS SINCE 1939	POWER TRANSFORMER COMMODORE CLASS	T100-1-XXXX T100-2-XXXX T100-3-XXXX	
CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE	Ensign Corporation 201 ENSIGN RD., BELLEVUE, IA 52031	Dim: Inches	Sheet 1 of 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH ENSIGN RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING