
2.0A Glass Passivated Rectifier

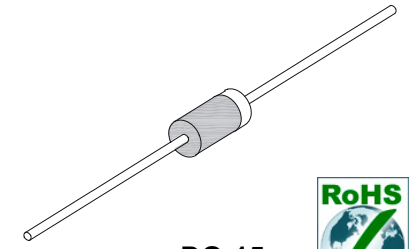

DO-15

RoHS Compliant

Features

- Low Forward Voltage Drop
- High Current Capability
- High Surge Current Capability
- High Reliability
- High Temperature Soldering Guaranteed 260°C/10 seconds /.375" (9.5mm) lead length, 5lbs (2.3kg) tension
- RoHS compliant

Mechanical Data

Case:	Molded Plastic
Epoxy:	Meets UL 94V-0 flammability rating
Terminals:	Axial leads, solderable per MIL-STD-202, Method 208
Polarity:	Cathode indicated by color band
Weight:	0.014 Ounce, 0.4 gram

Maximum Ratings *($T_{Ambient}$=25ºC unless noted otherwise)*

Symbol	Description	T2A05G	T2A10G	T2A20G	T2A40G	T2A60G	T2A80G	T2A100G	Unit
V_{RRM}	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V
V_{RMS}	Maximum RMS Voltage	35	70	140	280	420	560	700	V
V_{DC}	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
$I_{O(AV)}$	Maximum Average Forward Rectified Current @Ta=60° C	2.0							A
I_{FSM}	Peak Forward Surge Current (Note1)	70							A
T_J	Operating Junction Temperature Range	-55 to +150							° C
T_{STG}	Storage Temperature Range	-55 to +175							° C

Electrical Characteristics *(T Ambient=25ºC unless noted otherwise)*

Symbol	Description	T2A05G	T2A10G	T2A20G	T2A40G	T2A60G	T2A80G	T2A100G	Unit
V_F	Maximum Forward Voltage @ IF=2.0A	1.1							V
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage	TA=25° C	5.0						µA
		TA=100° C	50						uA
C_J	Typical Junction Capacitance (Note2)	30							pf
$R_{\theta-JA}$	Maximum Thermal Resistance (Note3)	25							° C/W

Note: 1. 8.3ms single half sine-wave superimposed on rated load (JEDEC method)
2. Measured at 1MHz and applied reverse voltage of 4.0Volts D.C.
3. Thermal resistance from junction to ambient at .375" (9.5mm) lead length.

Typical Characteristics Curves

Fig.1- Forward Current Derating Curve

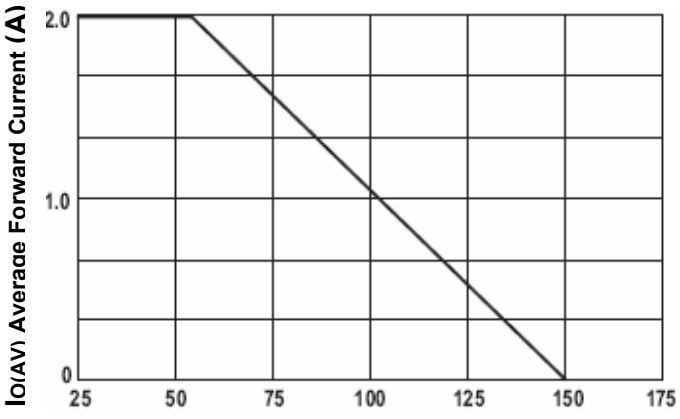


Fig.2-Max. Non-Repetitive Forward Surge Current

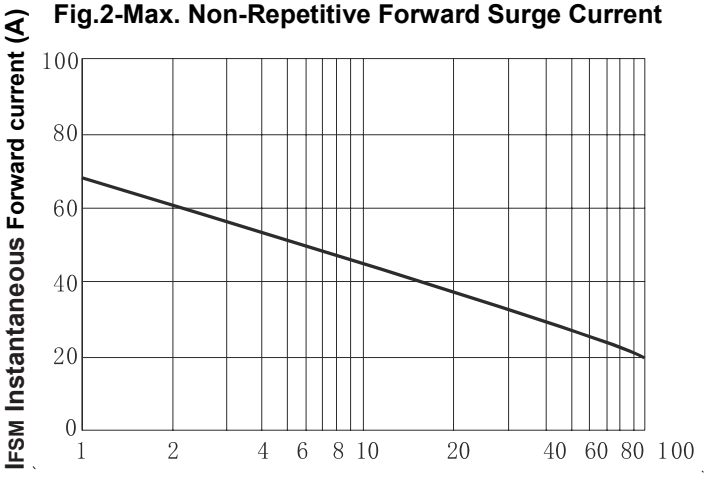


Fig.3-Typical Instantaneous Forward Characteristics

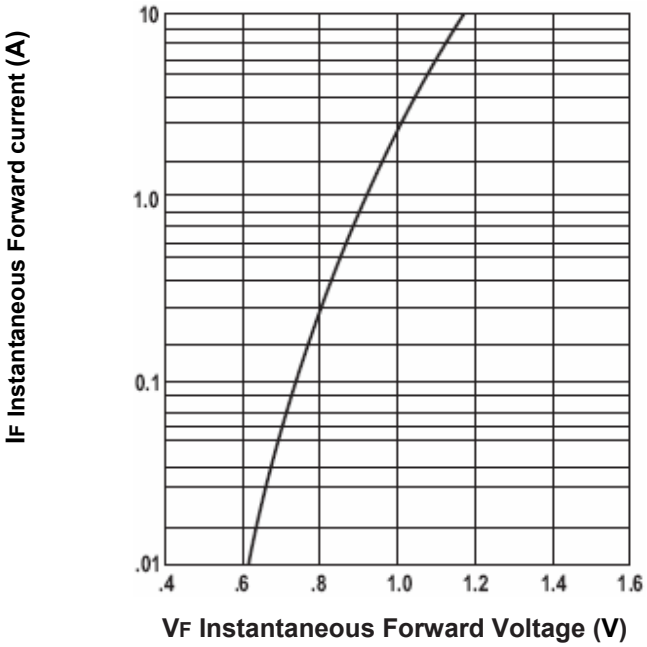


Fig.4- Typical Reverse Characteristics



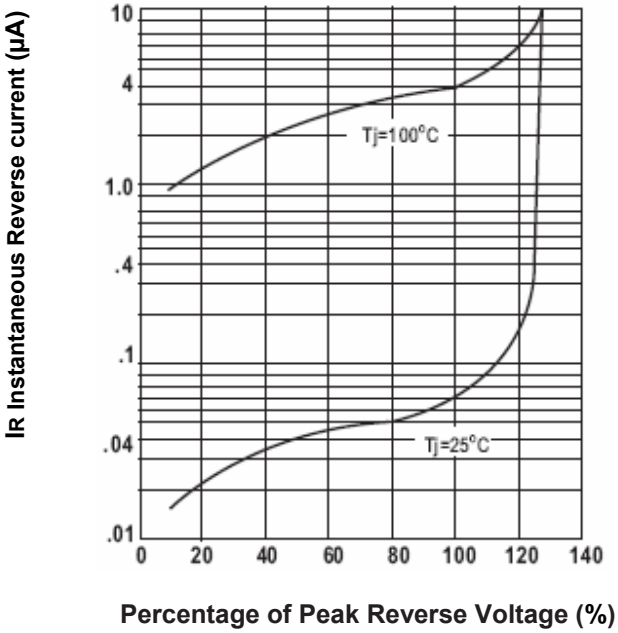


Fig.5-Typical junction capacitance

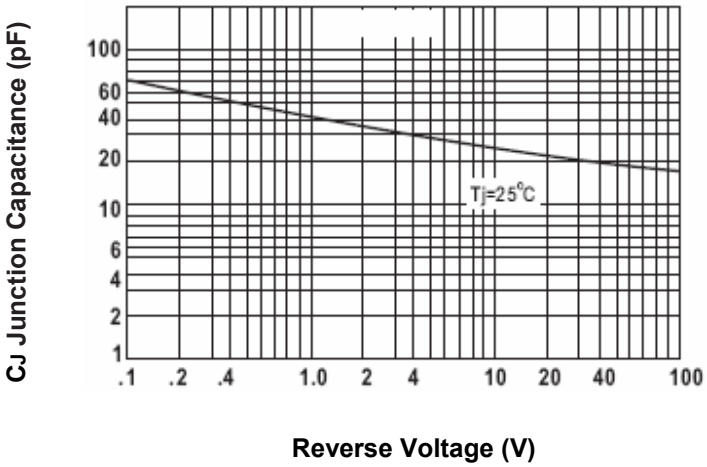

Dimensions in inches (mm)

DO-15

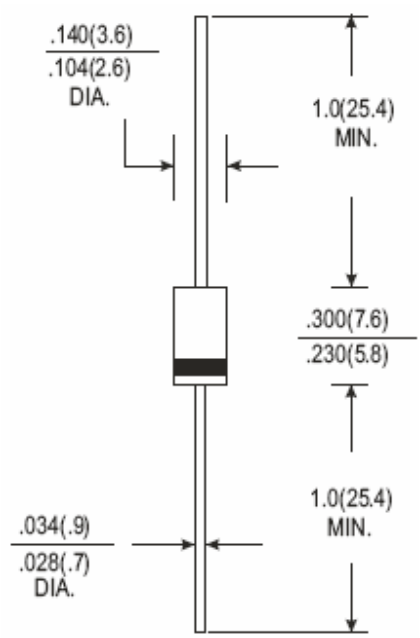

How to contact us:

US HEADQUARTERS

28040 WEST HARRISON PARKAWAY, VALENCIA, CA 91355-4162
Tel: (800) TAITRON (800) 824-8766 (661) 257-6060
Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415
Email: taitron@taitroncomponents.com
Http://www.taitroncomponents.com

TAITRON COMPONETS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P. 42970 MEXICO
Tel: +52-55-5560-1519
Fax: +52-55-5560-2190

TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL
Tel: +55-11-5574-7949
Fax: +55-11-5572-0052

TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

CROSS REGION PLAZA, 899 LINGLING ROAD, SUITE 18C, SHANGHAI, 200030, CHINA
Tel: +86-21-5424-9942
Fax: +86-21-5424-9931