



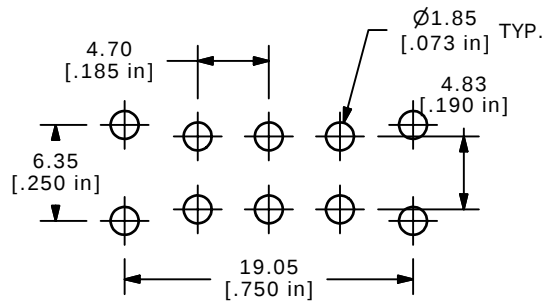

P.C. MOUNTING




| SWITCH FUNCTION |        |          |
|-----------------|--------|----------|
| POS. 1          | POS. 2 | POS. 3   |
|                 |        |          |
| ON              | NONE   | ON       |
| 2-3, 5-6        | OPEN   | 2-1, 5-4 |




CIRCUIT: DPDT

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 2 AMPS @250VAC  
5 AMPS @120VAC OR 28VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT

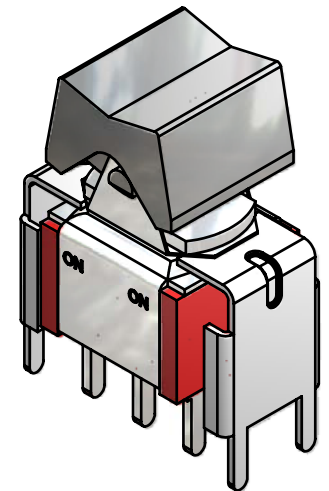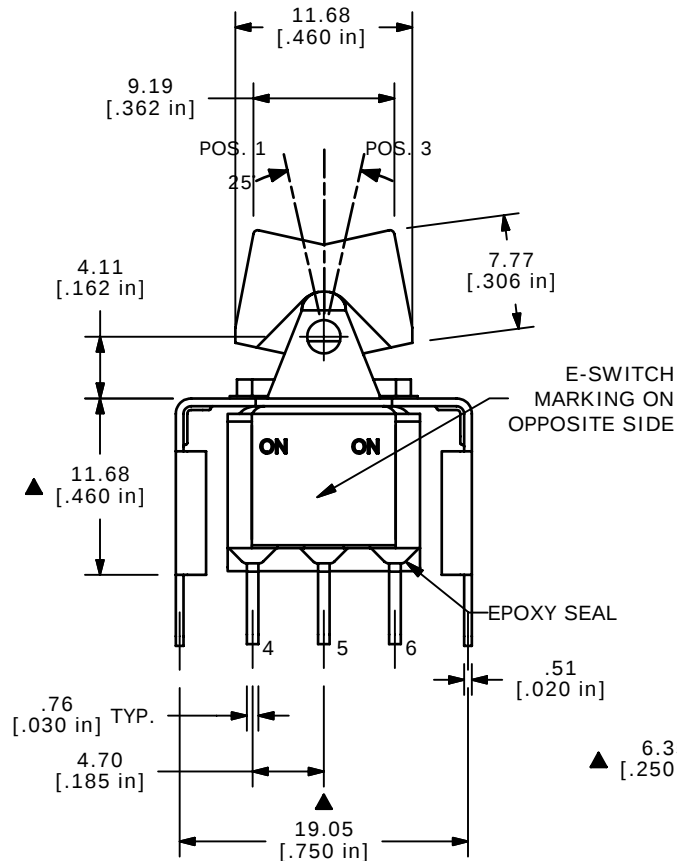

ISOMETRIC

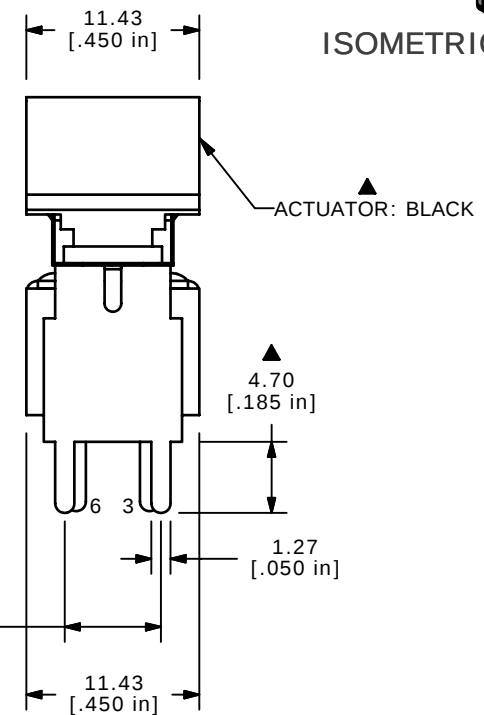**E-SWITCH®**

TITLE 300DP1J5BLKVS4QE

SCALE 2:1

DATE 1/23/2007

DR TN

DWG T321082

REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|     |        |                          |         |    |
|-----|--------|--------------------------|---------|----|
| B   | 16909  | FIXED P.C. MOUNT DIAGRAM | 1/23/07 | TN |
| A   | 14632  | RELEASED FOR PRODUCTION  | 1/20/05 | TN |
| REV | PCR NO | DESCRIPTION              | DATE    | BY |