



Major League Electronics .375 cl Barrier Terminal Blocks

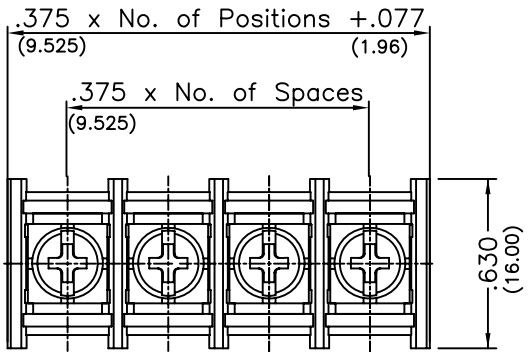


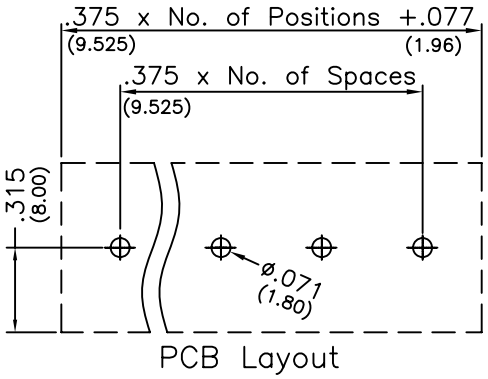

PCB Layout

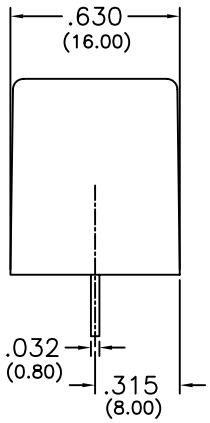

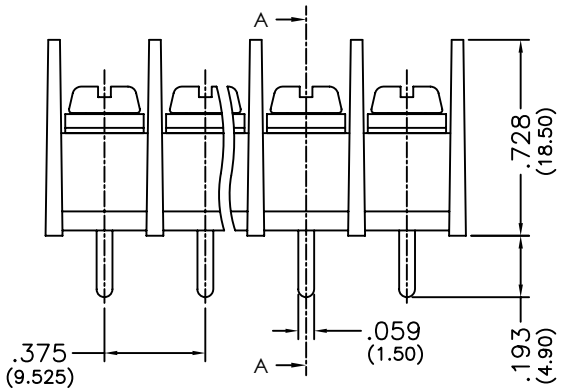



Section A–A

Ordering Information

TBB-06-[375]-[XX]-[XX]-[LF]


- 375 — Pitch: 375 = .375 (9.525) cl
- XX — No. of Positions: 02 - 24
- XX — Color:
  - BK = Black (Standard)
  - GR = Green
  - BL = Blue
  - WH = White
  - GY = Grey
  - OR = Orange
  - YW = Yellow
  - RD = Red
  - BR = Brown
- LF — Lead Free

Specifications

Current Rating: 25 Ampere
Voltage Rating: AC 300V
Wire Range: 12-22 AWG
Dielectric Withstanding Voltage: AC 2500V/1 minute
Insulation Resistance: DC 500V 1000MΩ
Operating Temperature: -30°C to + 105°C
Max Torque: 6.94 lb-in (8.0kgf. cm)
Strip Length: .394-.472 (10-12mm)

Materials

1. Body: PA66 (Nylon), UL94V-0
2. Screw: M3.5, C1018 Steel, Nickel Plated
3. Terminal: H62 Brass, Tin Plated

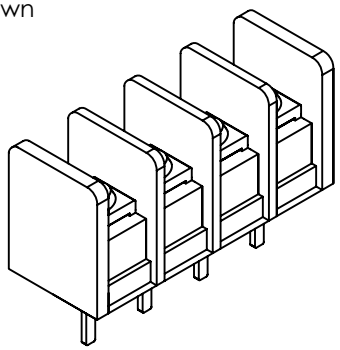

Parts are subject to change without notice

TBB-06-375-XX-XX-LF	.375cl Barrier Terminal Block Non-Interlock	05 DEC 08	Scale NTS

UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES (MM) TOLERANCES IN INCHES:

ONE DECIMAL PLACE ±0.30
TWO DECIMAL PLACE ±0.20
THREE DECIMAL PLACE ±0.15
FOUR DECIMAL PLACE ±0.10

Major League ELECTRONICS

4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision
C

Revisions

Revision C - (10th Jun 2010)

Color options amended to black as standard

Revision B - (23rd Mar 2010)

Side view added,
PCB layout amended to feature round holes Ø.071 (Ø1.80)
Voltage rating amended to AC 300V

TBB-06-375-XX-XX-LF	.375cl Barrier Terminal Block Non-Interlock	05 DEC 08	Scale NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES IN INCHES:

ONE DECIMAL PLACE ±0.30
TWO DECIMAL PLACE ±0.20
THREE DECIMAL PLACE ±0.15
FOUR DECIMAL PLACE ±0.10

Major League ELECTRONICS

4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision
C