APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/8/05	
A		REDRAWN	3/12/14	AY/SY
B		REVISED DIM.	3/20/14	HR/QZL

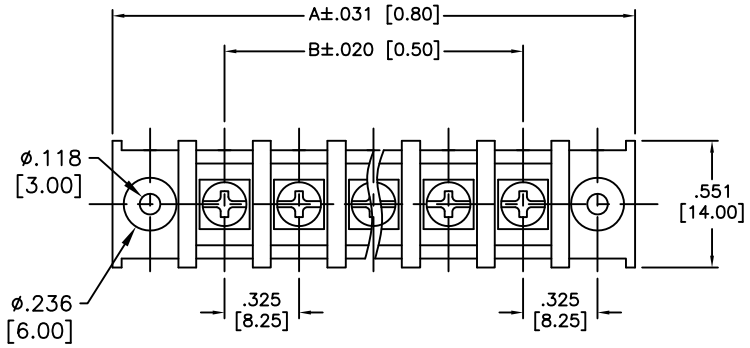

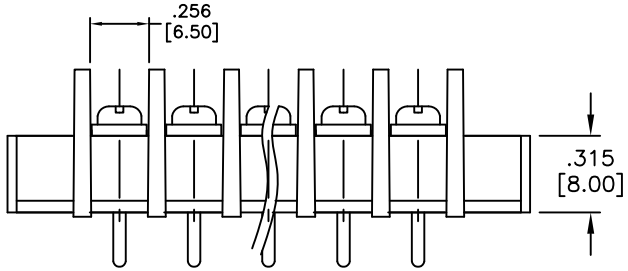



SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-0
Insulator color: Black
Contacts: Barss
Screw: M3.0, Barss, Nickel plated
Plating:
Tin over Copper underplate overall
Electrical:
Operation voltage: 300 VAC
Current rating: 15 Amps
Mechanical:
Wire Range: 12-22 Awg
Screw Torque Value: 10kg-cm
Insulation resistance: 500 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2000 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

Positions: 02 thru 32
A = .325 [8.25] x No. of Positions + .720 [18.30]
B = .325 [8.25] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/8/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.325 [8.25] CENTERLINE BARRIER BLOCK
VERTICAL, PCB TAILS, MOUNT ENDS

SIZE	PART NO.	REV.
X	TBD-XX-01-M	B

REF: S00031T | SCALE: NTS | SHEET 1 OF 1