

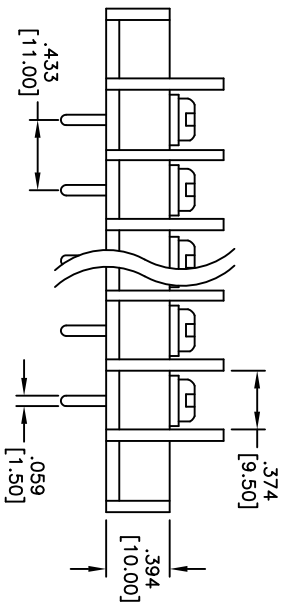


Rev	AWO #	Description	Date	Appr
-	11457	RELEASED	6/29/11	

APPROVED: _____

DATE: _____ TITLE: _____

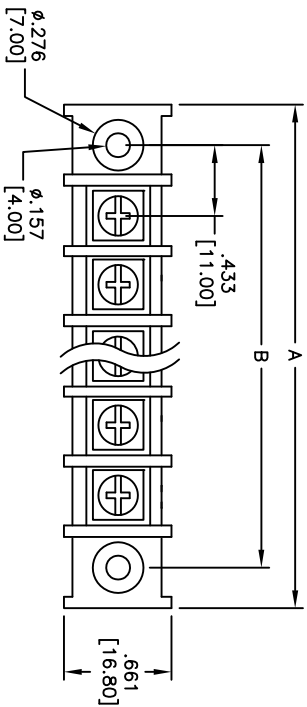

SPECIFICATIONS:

Material:

Insulator: Nylon66, rated UL 94V-0

Insulator color: Black

Contacts: Brass, Tin plated

Screws: Steel, Nickel plated

Electrical:

Operating voltage: 300 VAC max.

Current rating: 30 Amps max.

Insulation resistance: 1000 Mohms min. @ DC 500V

Insulation withstands voltage: 2,000 VAC for 1 minute

Mechanical:

Wire range: 22 - 14 AWG

Temperature Rating:

Operating temperature: -40°C to +120°C

Environmental:

Lead free, RoHS compliant



Poles: 2 thru 29
A = .433 [11.00] x No. of Poles + .945 [24.00]
B = .433 [11.00] x No. of Poles + .433 [11.00]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

.X ± .10 ØX ± .10
.XX ± .020 ØXX ± .015
.XXX ± .015 ØXXX ± .010

APPROVALS

DATE

DRAWN DY 6/29/11

CHECKED

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
BARRIER STRIP, .433" [11.00] PITCH

STRAIGHT, PCB THRU HOLE

SIZE PART NO.

X TBN-XX-01-M

REF: S00031T

SCALE: NTS

SHEET 1 OF 1