

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC


TC4020BP, TC4020BF, TC4020BFN

TC4020B 14 STAGE RIPPLE – CARRY BINARY COUNTER / DIVIDERS


TC4020B is 14 stage ripple carry binary counter having asynchronous clear function. The counter advances its counting stage by falling edge of $\overline{\text{CLOCK}}$ input. When RESET input is placed "H", all the circuits are reset regardless of $\overline{\text{CLOCK}}$ input making all the outputs (Q1, Q4 ~ Q14) to be "L".

This is most suitable for frequency dividers, control circuits and timing circuits.


(Note) The JEDEC SOP (FN) is not available in Japan.



P (DIP16-P-300-2.54A)
Weight : 1.00g (Typ.)



F (SOP16-P-300-1.27)
Weight : 0.18g (Typ.)



FN (SOL16-P-150-1.27)
Weight : 0.13g (Typ.)


MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Supply Voltage	V_{DD}	$V_{SS} - 0.5 \sim V_{SS} + 20$	V
Input Voltage	V_{IN}	$V_{SS} - 0.5 \sim V_{DD} + 0.5$	V
Output Voltage	V_{OUT}	$V_{SS} - 0.5 \sim V_{DD} + 0.5$	V
DC Input Current	I_{IN}	± 10	mA
Power Dissipation	P_D	300 (DIP) / 180 (SOIC)	mW
Operating Temperature Range	T_{opr}	$-40 \sim 85$	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	$-65 \sim 150$	$^{\circ}\text{C}$

TRUTH TABLE

$\overline{\text{CLOCK}} \Delta$	RESET	OUTPUT STATE
*	H	ALL OUTPUTS = "L"
	L	NO CHANGE
	L	ADVANCE TO NEXT STATE
Δ : Level Change * : Don't Care		


PIN ASSIGNMENT

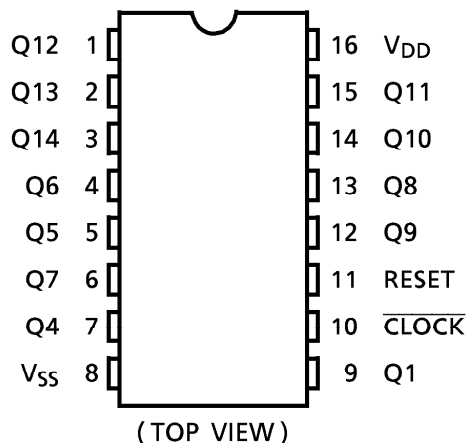

961001EBA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

LOGIC DIAGRAM

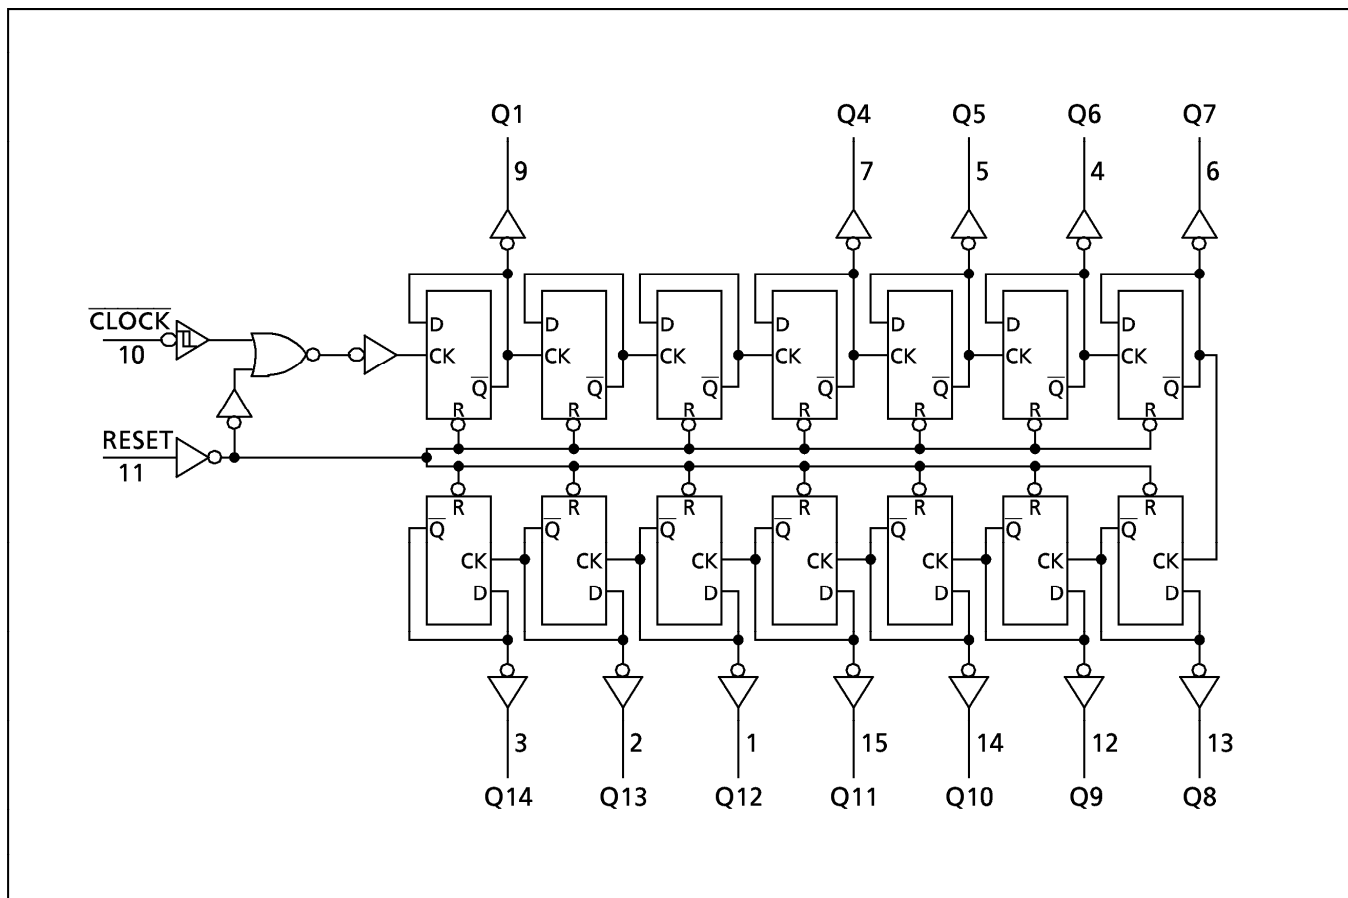

961001EBA2'

- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

RECOMMENDED OPERATING CONDITIONS ($V_{SS} = 0V$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
DC Supply Voltage	V_{DD}		3	—	18	V
Input Voltage	V_{IN}		0	—	V_{DD}	V

STATIC ELECTRICAL CHARACTERISTICS ($V_{SS} = 0V$)


CHARACTERISTIC	SYM-BOL	TEST CONDITION	V_{DD} (V)	- 40°C		25°C			85°C		UNIT
				MIN.	MAX.	MIN.	TYP.	MAX.	MIN.	MAX.	
High-Level Output Voltage	V_{OH}	$ I_{OUT} < 1\mu A$ $V_{IN} = V_{SS}, V_{DD}$	5	4.95	—	4.95	5.00	—	4.95	—	V
			10	9.95	—	9.95	10.00	—	9.95	—	
			15	14.95	—	14.95	15.00	—	14.95	—	
Low-Level Output Voltage	V_{OL}	$ I_{OUT} < 1\mu A$ $V_{IN} = V_{SS}, V_{DD}$	5	—	0.05	—	0.00	0.05	—	0.05	V
			10	—	0.05	—	0.00	0.05	—	0.05	
			15	—	0.05	—	0.00	0.05	—	0.05	
Output High Current	I_{OH}	$V_{OH} = 4.6V$	5	-0.61	—	-0.51	-1.0	—	-0.42	—	mA
		$V_{OH} = 2.5V$	5	-2.50	—	-2.10	-4.0	—	-1.70	—	
		$V_{OH} = 9.5V$	10	-1.50	—	-1.30	-2.2	—	-1.10	—	
		$V_{OH} = 13.5V$	15	-4.00	—	-3.40	-9.0	—	-2.80	—	
		$V_{IN} = V_{SS}, V_{DD}$									
Output Low Current	I_{OL}	$V_{OL} = 0.4V$	5	0.61	—	0.51	1.2	—	0.42	—	mA
		$V_{OL} = 0.5V$	10	1.50	—	1.30	3.2	—	1.10	—	
		$V_{OL} = 1.5V$	15	4.00	—	3.40	12.0	—	2.80	—	
		$V_{IN} = V_{SS}, V_{DD}$									
Input High Voltage	V_{IH}	$V_{OUT} = 0.5V, 4.5V$	5	3.5	—	3.5	2.75	—	3.5	—	V
		$V_{OUT} = 1.0V, 9.0V$	10	7.0	—	7.0	5.50	—	7.0	—	
		$V_{OUT} = 1.5V, 13.5V$	15	11.0	—	11.0	8.25	—	11.0	—	
		$ I_{OUT} < 1\mu A$									
Input Low Voltage	V_{IL}	$V_{OUT} = 0.5V, 4.5V$	5	—	1.5	—	2.25	1.5	—	1.5	V
		$V_{OUT} = 1.0V, 9.0V$	10	—	3.0	—	4.50	3.0	—	3.0	
		$V_{OUT} = 1.5V, 13.5V$	15	—	4.0	—	6.75	4.0	—	4.0	
		$ I_{OUT} < 1\mu A$									
Input Current	"H" Level	I_{IH}	$V_{IH} = 18V$	18	—	0.1	—	10^{-5}	0.1	—	μA
	"L" Level	I_{IL}	$V_{IL} = 0V$	18	—	-0.1	—	-10^{-5}	-0.1	—	
Quiescent Supply Current	I_{DD}	$V_{IN} = V_{SS}, V_{DD} *$	5	—	5	—	0.005	5	—	150	μA
			10	—	10	—	0.010	10	—	300	
			15	—	20	—	0.015	20	—	600	

* All valid input combinations.

DYNAMIC ELECTRICAL CHARACTERISTICS (Ta = 25°C, Vss = 0V, CL = 50pF)


CHARACTERISTIC	SYMBOL	TEST CONDITION	V _{DD} (V)	MIN.	TYP.	MAX.	UNIT
Output Transition Time (Low to High)	t _{TLH}		5 10 15	— — —	70 35 30	200 100 80	ns
Output Transition Time (High to Low)	t _{THL}		5 10 15	— — —	70 35 30	200 100 80	
Propagation Delay Time ($\overline{\text{CLOCK}}$ - Q1)	t _{pLH}		5 10 15	— — —	160 80 65	360 160 130	
Propagation Delay Time ($\overline{\text{CLOCK}}$ - Q1)	t _{pHL}		5 10 15	— — —	160 80 65	360 160 130	
Propagation Delay Time ($\overline{\text{CLOCK}}$ - Q14)	t _{pLH}		5 10 15	— — —	1000 500 400	2000 1000 800	
Propagation Delay Time ($\overline{\text{CLOCK}}$ - Q14)	t _{pHL}		5 10 15	— — —	1000 500 400	2000 1000 800	
Propagation Delay Time (RESET - Q)	t _{pHL}		5 10 15	— — —	150 70 50	280 120 100	
Max. Clock Frequency	f _{CL}		5 10 15	3.5 8.0 12.0	10 20 25	— — —	MHz
Min. Clock Pulse Width (RESET)	t _w		5 10 15	— — —	50 20 15	140 60 40	ns
Min. Pulse Width	t _w		5 10 15	— — —	100 40 30	200 80 60	
Min. Removal Time (RESET - $\overline{\text{CLOCK}}$)	t _{rem}		5 10 15	— — —	— — —	350 150 100	
Max. Clock Input Rise Time Max. Clock Input Fall Time	t _{rCL} t _{fCL}		5 10 15	No Limit			μs
Input Capacitance	C _{IN}			—	5	7.5	pF

OPERATING SUPPLY CURRENT TEST CIRCUIT

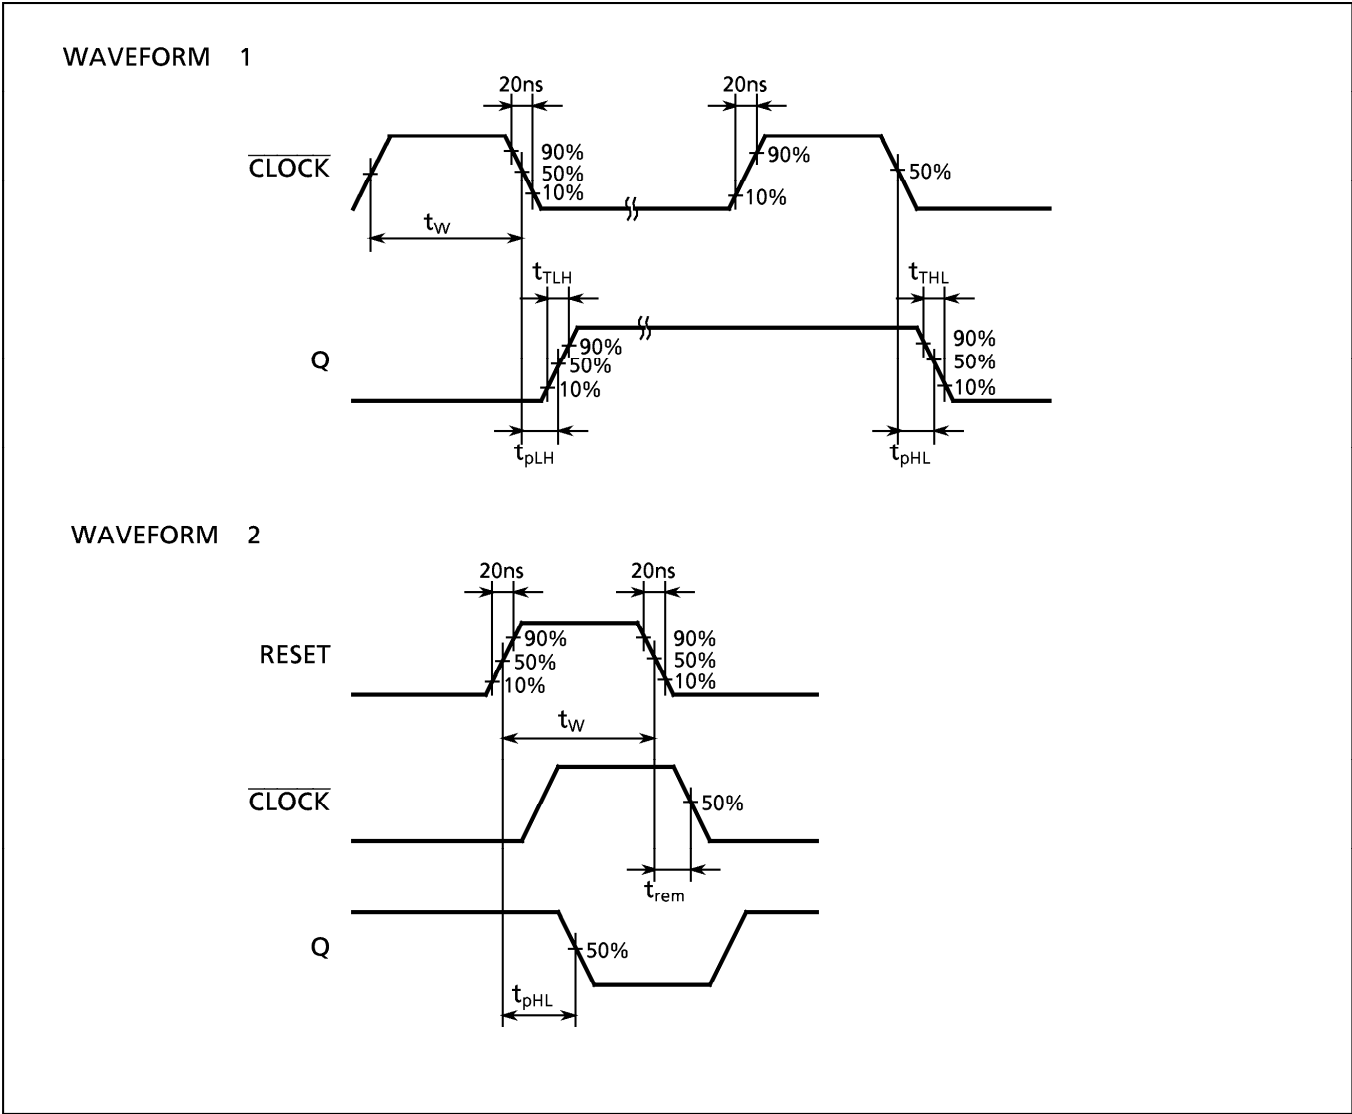

DIP 16PIN OUTLINE DRAWING (DIP16-P-300-2.54A)


Unit in mm

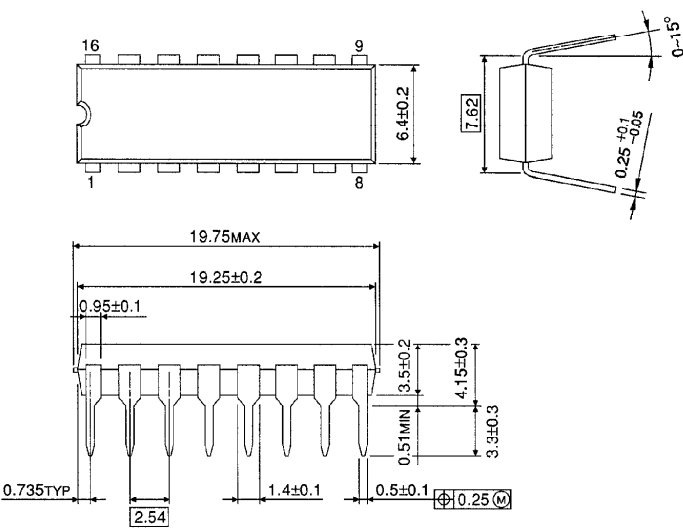

Weight : 1.00g (Typ.)

SOP 16PIN (200mil BODY) OUTLINE DRAWING (SOP16-P-300-1.27)

Unit in mm

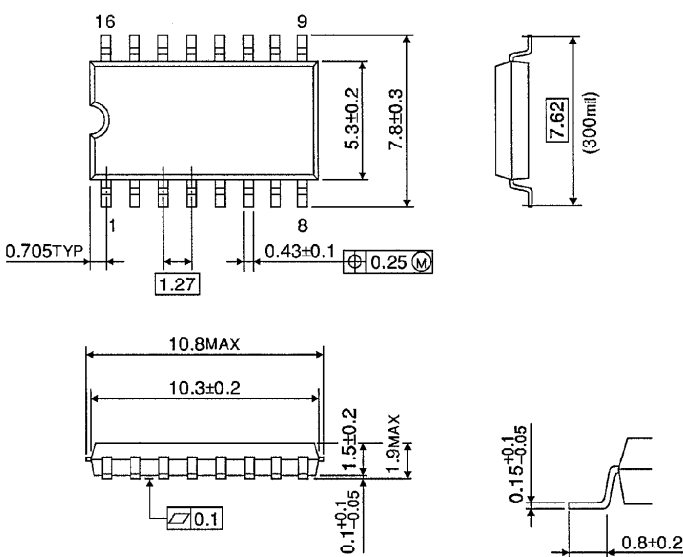


Weight : 0.18g (Typ.)

SOP 16PIN (150mil BODY) OUTLINE DRAWING (SOL16-P-150-1.27)

Unit in mm

(Note) This package is not available in Japan.

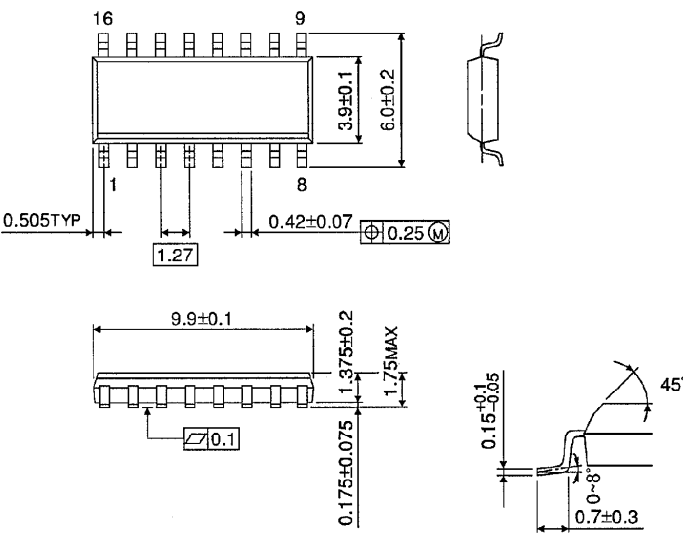

Weight : 0.13g (Typ.)