TDK

Common Mode Filters(SMD)
For High-speed Differential Signal Line

Conformity to RoHS Directive

TCM Series TCM1608G Type

FEATURES

- The TCM1608G (L1.6×W0.8×T0.4mm) is a dual-circuit modularized common mode filter array that is in the smallest class in the industry.
- By providing wide bandwidth (cutoff frequency: 3GHz) for differential mode, this product has almost no effect for high-speed differential signals and can suppress the radiated emission.
- This product contains no lead and supports lead-free soldering.

APPLICATIONS

- High speed interface(LVDS, IEEE1394 and USB2.0) in electronics devices.
- PDP/LCD/DLP/PJ TVs, DVD players, notebook PCs, DVC, DSC, amusement machines, portable audio, digital cellular phones, etc.

PRODUCT IDENTIFICATION

TCM	1608	G	-	201	-	4P	-	T
(1)	(2)	(3)		(4)		(5)		(6)

(1) Series name
(2) Dimensions L×W
(3) Product identification number
(4) Impedance[at 100MHz]
201: 200Ω
(5) Number of line
4P: 4-line
(6) Packaging style
T: ø180mm reel taping


TEMPERATURE RANGE

Operating	–25 to +85°C

PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	4000 pieces/reel

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAMS/RECOMMENDED PC BOARD PATTERNS

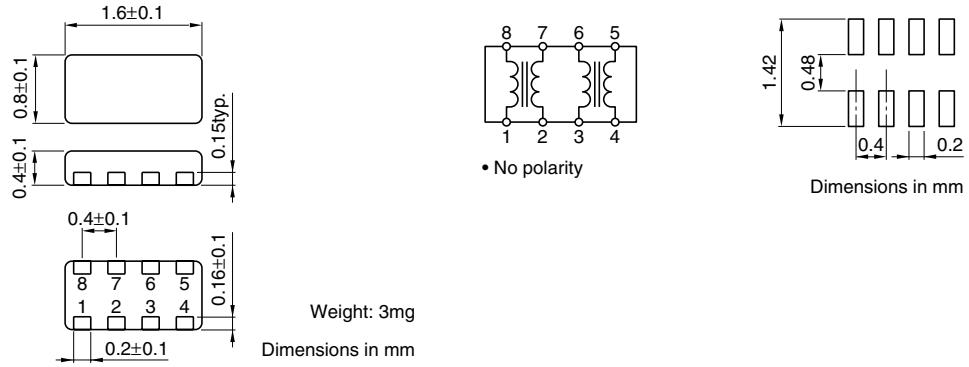

Weight: 3mg

Dimensions in mm

ELECTRICAL CHARACTERISTICS

Part No.	Common mode impedance (Ω) [100MHz]	DC resistance (Ω)[1 line]	Rated current Idc(A)max.	Rated voltage Edc(V)max.	Insulation resistance (MΩ)min.
TCM1608G-350-4P	35±30%	0.85±30%	0.10	5	10
TCM1608G-650-4P	65±20%	1.30±30%	0.10	5	10
TCM1608G-900-4P	90±20%	1.50±30%	0.10	5	10
TCM1608G-201-4P	200±20%	4.00±30%	0.05	5	10

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS

IMPEDANCE vs. FREQUENCY CHARACTERISTICS

